



# WTM12L-24161820A00

## W12

PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type               | part no. |
|--------------------|----------|
| WTM12L-24161820A00 | 1125932  |

Other models and accessories → [www.sick.com/W12](http://www.sick.com/W12)

### Detailed technical data

#### Features

|   |   |
|---|---|
| <b>Functional principle</b>                               | Photoelectric proximity sensor  |
| <b>Functional principle detail</b>                        | Background suppression, Foreground suppression, MultiMode, distance value   |
| <b>MultiMode</b>  | 1 Background suppression<br>2 Foreground suppression<br>3 Two Value Teach-in<br>4 Two independent switching points<br>5 Window<br>6 ApplicationSelect<br>M manual / measurement |
| <b>Sensing range</b>                                      |   |
| Sensing range min.  | 15 mm (mode 1, 3, 4, 5)<br>0 mm (mode 2)  |
| Sensing range max.  | 15 mm (mode 1 and 6 combined)<br>420 mm (mode 1, 3, 4, 5)<br>150 mm (mode 2)<br>650 mm (mode 1 and 6 combined)  |
| Adjustable switching threshold for background suppression | 30 mm ... 420 mm (mode 1, 3, 4, 5)  |

<sup>1)</sup> 90% remission factor.

<sup>2)</sup> Equivalent to 1  $\sigma$ .

<sup>3)</sup> See repeatability characteristic lines.

<sup>4)</sup> Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

|   |  |   |
|---|--|---|
| Adjustable switching threshold for foreground suppression                                       |  | 30 mm ... 650 mm (mode 1 and 6 combined)  |
|   |  | 35 mm ... 150 mm (mode 2)   |
| Reference object  |  | Object with 90% remission factor (complies with standard white according to DIN 5033) |
| Minimum distance between set sensing range and background (black 6% / white 90%)                |  | 4 mm, at a distance of 140 mm (mode 1, 3, 4, 5)                                       |
|   |  | 3 mm, at a distance of 200 mm (mode 1 and 6 combined)                                 |
| Minimum object height at set sensing range in front of black background (6% remission factor)   |  | 2 mm, at a distance of 90 mm (mode 2)   |
| Recommended sensing range for the best performance  |  | 40 mm ... 160 mm (mode 1, 3, 4, 5)  |
|   |  | 40 mm ... 120 mm (mode 2)   |
|   |  | 40 mm ... 400 mm (mode 1 and 6 combined)  |
| <b>Distance value</b>   |  |   |
| Measuring range   |  | 30 mm ... 420 mm  |
| Resolution  |  | 0.1 mm  |
| Repeatability   |  | 0,1 mm ... 4 mm <sup>1) 2) 3)</sup>   |
| Accuracy  |  | Typ. 2.0 mm at 30 ... 120 mm distance <sup>1)</sup>                                   |
|   |  | Typ. 12 mm at 120 ... 250 mm distance <sup>1)</sup>                                   |
|   |  | Typ. 40 mm at 250 ... 400 mm distance <sup>1)</sup>                                   |
| Distance value output   |  | Via IO-Link   |
| Update rate of the distance value   |  | 20 ms   |
| <b>Emitted beam</b>   |  |   |
| Light source  |  | Laser   |
| Type of light   |  | Visible red light   |
| Shape of light spot   |  | Ellipse shape   |
| Light spot size (distance)  |  | 2.4 mm x 1 mm (160 mm)  |
| Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) |  | < +/- 1.0° (at Ta = +23 °C)   |
| <b>Key laser figures</b>  |  |   |
| Normative reference   |  | EN 60825-1:2014, IEC 60825-1:2014   |
| Laser class   |  | 1 <sup>4)</sup>   |
| Wave length   |  | 655 nm  |
| Pulse duration  |  | 4 µs  |
| Maximum pulse power   |  | < 4.03 mW   |
| Average service life  |  | 50,000 h at T <sub>U</sub> = +25 °C   |
| <b>Smallest detectable object (MDO) typ.</b>  |  |   |
|   |  | 3 mm, at 160 mm distance, mode 1, 3, 4, 5   |
|   |  | 2.8 mm, at a distance of 120 mm, mode 2   |
|   |  | 2.5 mm, at a distance of 200 mm, mode 1 and 6 combined                                |

<sup>1)</sup> 90% remission factor.

<sup>2)</sup> Equivalent to 1 σ.

<sup>3)</sup> See repeatability characteristic lines.

<sup>4)</sup> Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

|                             |  |
|-----------------------------|--|
|                             | Object with 90% remission factor (complies with standard white according to DIN 5033)  |
| <b>Adjustment</b>           | Teach-Turn adjustment<br>BluePilot<br>For adjusting the sensing range with mode selection  |
|                             | IO-Link<br>For configuring the sensor parameters and Smart Task functions  |
| <b>Display</b>              | LED blue<br>BluePilot: Display of mode, display of output states Q <sub>L1</sub> (LED 3 permanently on) and Q <sub>L2</sub> (LED 5 permanently on)   |
|                             | LED green<br>Operating indicator<br>Static on: power on<br>Flashing: IO-Link mode  |
|                             | LED yellow<br>Status of received light beam<br>Static on: object present<br>Static off: object not present   |
| <b>Special features</b>     | MultiMode  |
| <b>Special applications</b> | Detecting small objects, Detection of objects moving at high speeds, Detecting flat objects, Detecting uneven, shiny objects, Detection of poorly remitting and tilted objects, Detecting perforated objects |

<sup>1)</sup> 90% remission factor.

<sup>2)</sup> Equivalent to 1  $\sigma$ .

<sup>3)</sup> See repeatability characteristic lines.

<sup>4)</sup> Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

### Safety-related parameters

|                                     |           |
|-------------------------------------|-----------|
| <b>MTTF<sub>D</sub></b>             | 280 years |
| <b>DC<sub>avg</sub></b>             | 0 %       |
| <b>T<sub>M</sub> (mission time)</b> | 10 years  |

### Communication interface

|                             |                        |  |
|-----------------------------|------------------------|--|
| <b>IO-Link</b>              |                        | ✓, IO-Link V1.1                              |
|                             | Data transmission rate | COM2 (38,4 kBaud)                            |
|                             | Cycle time             | 2.3 ms                                       |
|                             | Process data length    | 16 Bit                                       |
|                             | Process data structure | Bit 0 = switching signal Q <sub>L1</sub>     |
|                             |                        | Bit 1 = switching signal Q <sub>L2</sub>     |
|                             |                        | Bit 2 ... 15 = Current receiver level (live) |
|                             | VendorID               | 26   |
|                             | DeviceID HEX           | 0x8002D2                                     |
|                             | DeviceID DEC           | 8389330                                      |
| Compatible master port type | A                      |  |
| SIO mode support            | Yes                    |  |

### Electronics

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| <b>Supply voltage U<sub>B</sub></b> | 10 V DC ... 30 V DC <sup>1)</sup> |
|-------------------------------------|-----------------------------------|

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> With light/dark ratio 1:1.

<sup>4)</sup> This switching output must not be connected to another output.

|                               |   |
|-------------------------------|---|
| <b>Ripple</b>                 | ≤ 5 V   |
| <b>Usage category</b>         | DC-12 (According to EN 60947-5-2)<br>DC-13 (According to EN 60947-5-2)  |
| <b>Current consumption</b>    | ≤ 14 mA, without load. At $U_B = 24\text{ V}$   |
| <b>Protection class</b>       | III   |
| <b>Digital output</b>         |   |
| Number                        | 2 (Complementary)   |
| Type                          | Push-pull: PNP/NPN  |
| Switching mode                | Light/dark switching  |
| Signal voltage PNP HIGH/LOW   | Approx. $U_B - 2.5\text{ V} / 0\text{ V}$   |
| Signal voltage NPN HIGH/LOW   | Approx. $U_B / < 2.5\text{ V}$  |
| Output current $I_{\max}$     | ≤ 100 mA  |
| Circuit protection outputs    | Reverse polarity protected<br>Overcurrent protected<br>Short-circuit protected  |
| Response time                 | ≤ 200 μs (mode 1, 2, 3) <sup>2)</sup><br>≤ 500 μs (mode 4, 5) <sup>2)</sup><br>≤ 15 ms (mode 1 and 6 combined) <sup>2)</sup>  |
| Repeatability (response time) | 85 μs (mode 1, 2, 3) <sup>2)</sup><br>150 μs (mode 4, 5) <sup>2)</sup><br>5 ms (mode 1 and 6 combined) <sup>2)</sup>  |
| Switching frequency           | 2,500 Hz (mode 1, 2, 3) <sup>3)</sup><br>1,000 Hz (mode 4, 5) <sup>3)</sup><br>30 Hz (mode 1 and 6 combined) <sup>3)</sup>  |
| <b>Pin/Wire assignment</b>    |   |
| BN 1                          | + (L+)  |
| WH 2                          | $\bar{Q}_{L1}$ /MF<br>Digital output, dark switching, object present → output $\bar{Q}_{L1}$ LOW (Mode 1, 3, 5, 6) <sup>4)</sup><br>The pin 2 function of the sensor can be configured<br>Digital output, light switching, object present → output QL1 LOW (Mode 2) <sup>4)</sup><br>Additional possible settings via IO-Link<br>Digital output, light switching, object present → output QL2 HIGH (Mode 4) <sup>4)</sup> |
| BU 3                          | - (M)   |
| BK 4                          | QL1/C<br>Digital output, light switching, object present → output QL1 HIGH (Mode 1, 3, 4, 5, 6) <sup>4)</sup><br>The pin 4 function of the sensor can be configured<br>Digital output, dark switching, object present → output $\bar{Q}_{L1}$ HIGH (Mode 2) <sup>4)</sup><br>Additional possible settings via IO-Link<br>IO-Link communication C  |

1) Limit values.

2) Signal transit time with resistive load in switching mode.

3) With light/dark ratio 1:1.

4) This switching output must not be connected to another output.

Mechanics

|   |                                 |
|---|---------------------------------|
| <b>Housing</b>  | Rectangular                     |
| <b>Dimensions (W x H x D)</b>                         | 15.6 mm x 49.5 mm x 43.1 mm     |
| <b>Connection</b>                                     | Male connector M12, 4-pin       |
| <b>Material</b>                                       |                                 |
|   | Housing Metal, zinc diecast     |
|   | Front screen Plastic, PMMA      |
|   | Male connector Plastic, VISTAL® |
| <b>Weight</b>   | Approx. 77 g                    |
| <b>Maximum tightening torque of the fixing screws</b> | 1.4 Nm                          |

Ambient data

|  |   |
|--|---|
| <b>Enclosure rating</b>                    | IP66 (EN 60529)<br>IP67 (EN 60529)<br>IP69 (EN 60529)   |
| <b>Ambient operating temperature</b>       | -20 °C ... +55 °C   |
| <b>Ambient temperature, storage</b>        | -40 °C ... +70 °C   |
| <b>Warm-up time</b>                        | < 15 min, Where T <sub>u</sub> is under -10 °C  |
| <b>Typ. Ambient light immunity</b>         | Artificial light: ≤ 50,000 lx<br>Sunlight: ≤ 50,000 lx  |
| <b>Shock resistance</b>                    | 50 g, 11 ms (25 positive and 25 negative shocks along X, Y, Z axes, 150 total shocks (EN60068-2-27))            |
| <b>Vibration resistance</b>                | 10 Hz ... 2,000 Hz (Amplitude 0.5 mm / 10 g, 20 sweeps per axis, for X, Y, Z axes, 1 octave/min, (EN60068-2-6)) |
| <b>Air humidity</b>                        | 35 % ... 95 %, relative humidity (no condensation)  |
| <b>Electromagnetic compatibility (EMC)</b> | EN 60947-5-2  |
| <b>Resistance to cleaning agent</b>        | ECOLAB  |
| <b>UL File No.</b>                         | NRKH.E181493 & NRKH7.E181493  |

Smart Task

|                            |  |
|----------------------------|--|
| <b>Smart Task name</b>     | Base logics  |
| <b>Logic function</b>      | Direct<br>AND<br>OR  |
| <b>Timer function</b>      | Deactivated<br>Switch-on delay<br>Off delay<br>ON and OFF delay<br>Impulse (one shot)  |
| <b>Inverter</b>            | Yes  |
| <b>Switching frequency</b> | SIO Logic: 2000 Hz (mode 1, 2, 3) <sup>1)</sup><br>SIO Logic: 900 Hz (mode 4, 5) <sup>1)</sup><br>SIO Logic: 30 Hz (mode 1 and 6 combined) <sup>1)</sup><br>IOL: 1600 Hz (mode 1, 2, 3) <sup>2)</sup><br>IOL: 800 Hz (mode 4, 5) <sup>2)</sup><br>IOL: 30 Hz (mode 1 and 6 combined) <sup>2)</sup> |

<sup>1)</sup> Use of Smart Task functions without IO-Link communication (SIO mode).

<sup>2)</sup> Use of Smart Task functions with IO-Link communication function.

|                         |  |                  |
|-------------------------|--|------------------|
| <b>Response time</b>    | SIO Logic: 250 µs (mode 1, 2, 3) <sup>1)</sup>         |                  |
|                         | Mode 4, 5 <sup>1)</sup>                                |                  |
|                         | SIO Logic: 15 ms (mode 1 and 6 combined) <sup>1)</sup> |                  |
|                         | IOL: 300 µs (mode 1, 2, 3) <sup>2)</sup>               |                  |
|                         | IOL: 600 µs (mode 4, 5) <sup>2)</sup>                  |                  |
| <b>Repeatability</b>    | IOL: 15 ms (mode 1 and 6 combined) <sup>2)</sup>       |                  |
|                         | SIO Logic: 120 µs (mode 1, 2, 3) <sup>1)</sup>         |                  |
|                         | SIO Logic: 200 µs (mode 4, 5) <sup>1)</sup>            |                  |
|                         | SIO Logic: 5 ms (mode 1 and 6 combined) <sup>1)</sup>  |                  |
|                         | Mode 1, 2, 3 <sup>2)</sup>                             |                  |
| <b>Switching signal</b> | IOL: 250 µs (mode 4, 5) <sup>2)</sup>                  |                  |
|                         | IOL: 5 ms (mode 1 and 6 combined) <sup>2)</sup>        |                  |
|                         |  |                  |
|                         | Switching signal Q <sub>L1</sub>                       | Switching output |
|                         | Switching signal $\bar{Q}_{L1}$                        | Switching output |

<sup>1)</sup> Use of Smart Task functions without IO-Link communication (SIO mode).

<sup>2)</sup> Use of Smart Task functions with IO-Link communication function.

### Diagnosis

|  |                                      |
|--|--------------------------------------|
| <b>Device temperature</b>                          |                                      |
| Measuring range                                    | Very cold, cold, moderate, warm, hot |
| <b>Device status</b>                               | Yes                                  |
| <b>Detailed device status</b>                      | Yes                                  |
| <b>Operating hour counter</b>                      | Yes                                  |
| <b>Operating hours counter with reset function</b> | Yes                                  |
| <b>Quality of teach</b>                            | Yes                                  |


### Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270904 |
| <b>ECLASS 5.1.4</b>   | 27270904 |
| <b>ECLASS 6.0</b>     | 27270904 |
| <b>ECLASS 6.2</b>     | 27270904 |
| <b>ECLASS 7.0</b>     | 27270904 |
| <b>ECLASS 8.0</b>     | 27270904 |
| <b>ECLASS 8.1</b>     | 27270904 |
| <b>ECLASS 9.0</b>     | 27270904 |
| <b>ECLASS 10.0</b>    | 27270904 |
| <b>ECLASS 11.0</b>    | 27270904 |
| <b>ECLASS 12.0</b>    | 27270903 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

Certificates

|  |   |
|--|---|
| <b>EU declaration of conformity</b>  | ✓ |
| <b>UK declaration of conformity</b>  | ✓ |
| <b>ACMA declaration of conformity</b>  | ✓ |
| <b>Moroccan declaration of conformity</b>                                    | ✓ |
| <b>China-RoHS</b>  | ✓ |
| <b>ECOLAB certificate</b>  | ✓ |
| <b>cULus certificate</b>   | ✓ |
| <b>IO-Link</b>   | ✓ |
| <b>Laser safety (IEC 60825-1) declaration of manufacturer</b>                | ✓ |
| <b>Information according to Art. 3 of Data Act (Regulation EU 2023/2854)</b> | ✓ |


Dimensional drawing

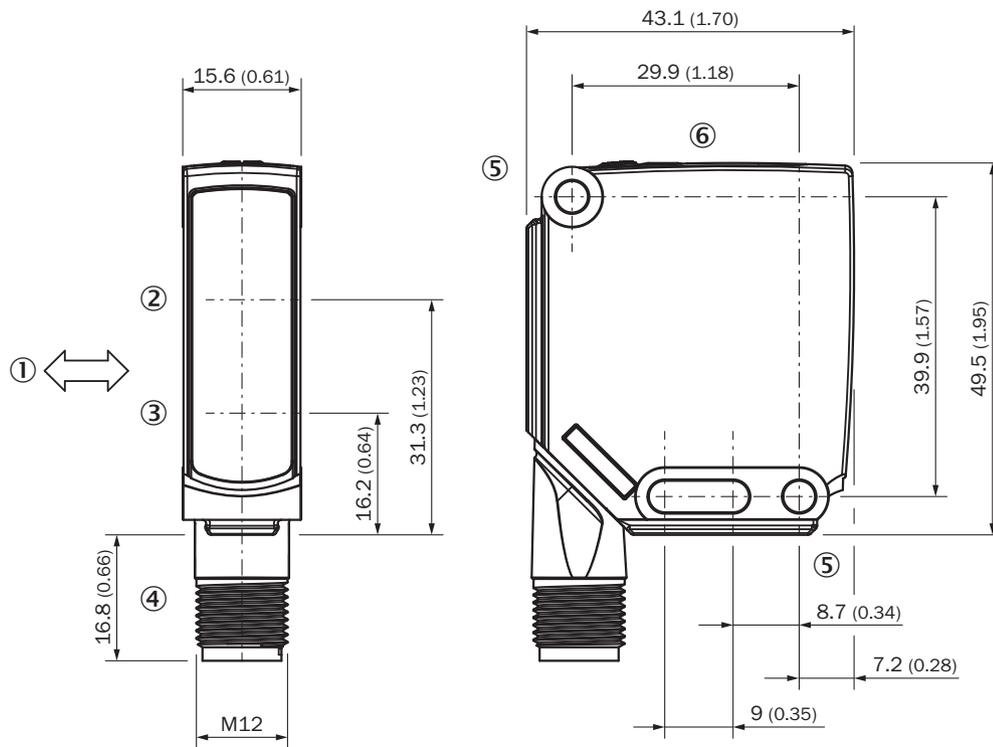

Dimensions in mm (inch)


- ① Standard direction of the material being detected
- ② Center of optical axis, receiver
- ③ Center of optical axis, sender
- ④ Connection
- ⑤ Mounting hole,  $\varnothing$  4.2 mm
- ⑥ display and adjustment elements

display and adjustment elements

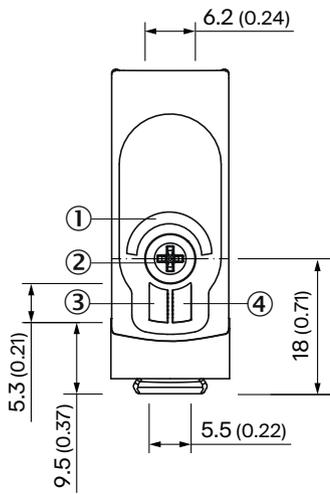


- ① LED blue
- ② Teach-Turn adjustment
- ③ LED green
- ④ LED yellow

Display and setting detail

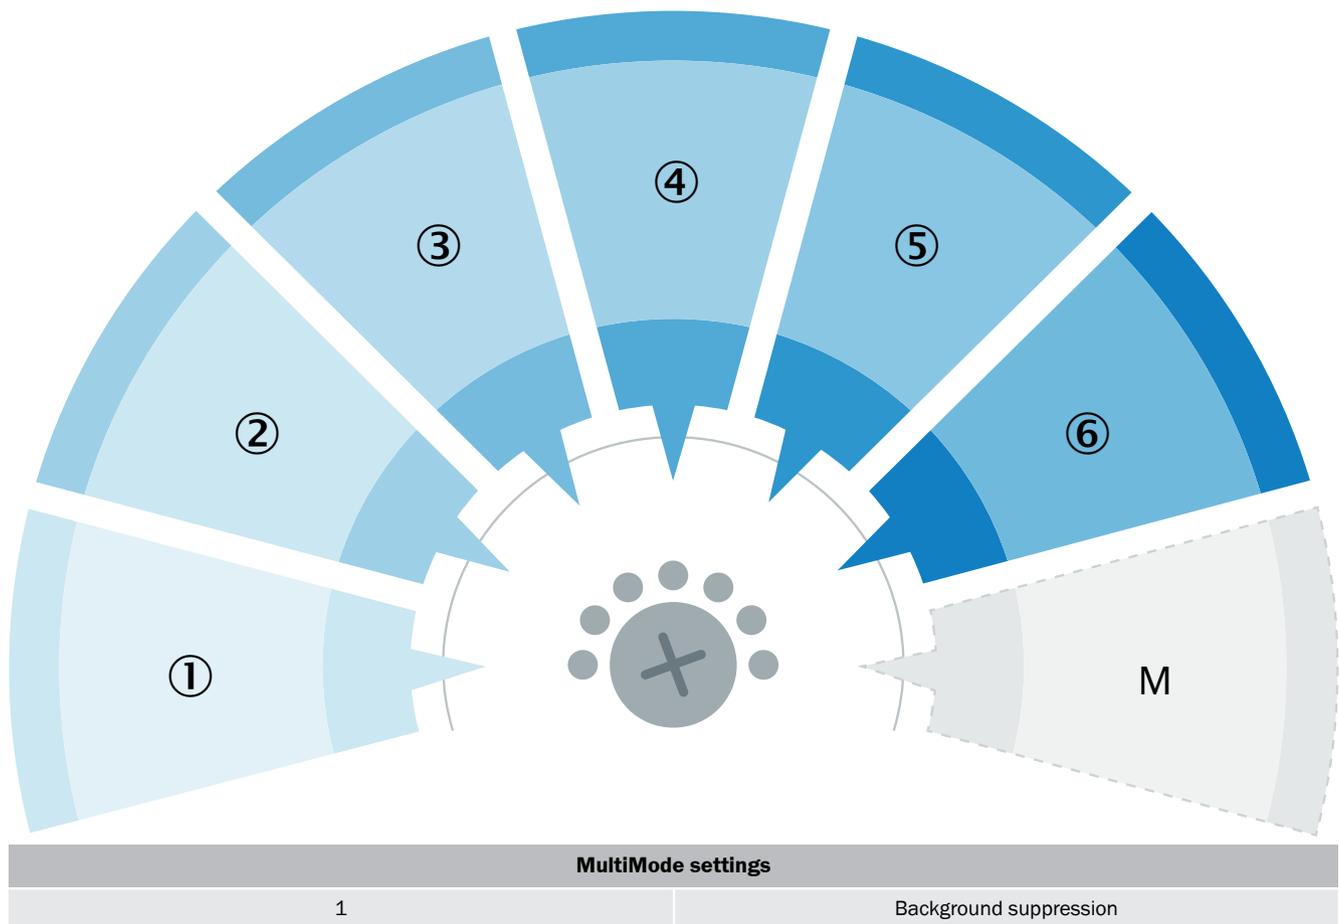


| MultiMode settings |                                  |
|--------------------|----------------------------------|
| 2                  | Foreground suppression           |
| 3                  | Two Value Teach-in               |
| 4                  | Two independent switching points |
| 5                  | Window                           |
| 6                  | ApplicationSelect                |
| M                  | Manual / measurement             |


Connection type M12 male connector, 4-pin





Connection diagram Cd-597 (Mode 4)





Connection diagram Cd-598 (Mode 1, 2, 3, 5, 6)





Truth table Push-pull: PNP/NPN – dark switching  $\bar{Q}$  (MultiMode 1, 3, 5, 6)
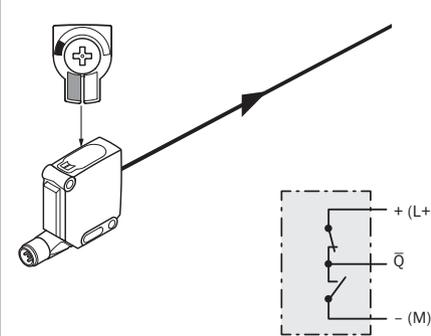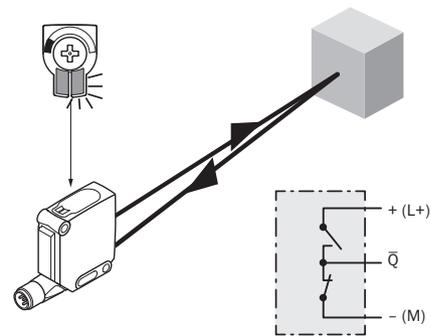
|                         | Dark switching $\bar{Q}$ (normally closed (upper switch), normally open (lower switch)) |   |
|-------------------------|---|---|
|                         | Object not present → Output HIGH  | Object present → Output LOW   |
| Light receive           | ⊗   | ☑   |
| Light receive indicator | ⊗   | ☀   |
| Load resistance to L+   | ⊗   | ⚡   |
| Load resistance to M    | ⚡   | ⊗   |
|                         |        |  |



Truth table Push-pull: PNP/NPN – light switching Q (MultiMode 1, 3, 5, 6)
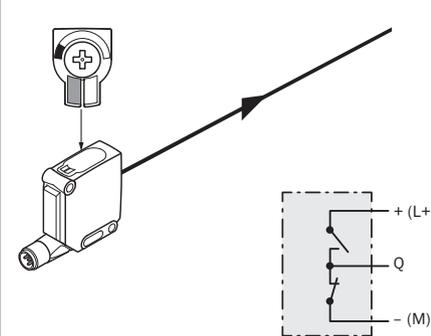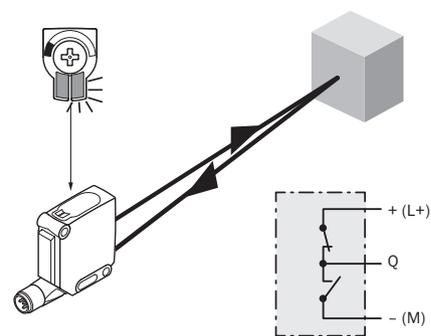
|                         | Light switching Q (normally open (upper switch), normally closed (lower switch))    |   |
|-------------------------|---|---|
|                         | Object not present → Output LOW   | Object present → Output HIGH  |
| Light receive           | ⊗   | ☑   |
| Light receive indicator | ⊗   | ☀   |
| Load resistance to L+   | ⚡   | ⊗   |
| Load resistance to M    | ⊗   | ⚡   |
|                         |  |  |

Truth table Push-pull: PNP/NPN – light switching Q (MultiMode 2)
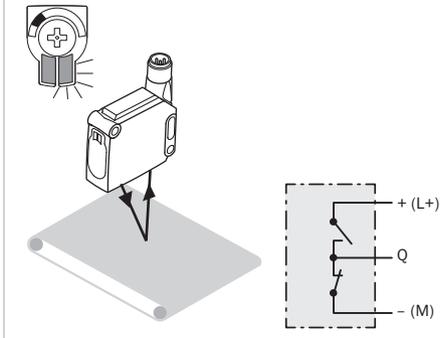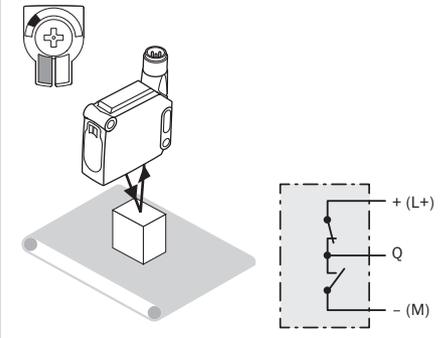
|                         | Light switching Q (normally open (upper switch), normally closed (lower switch))   |   |
|-------------------------|--|---|
|                         | Object not present → Output LOW  | Object present → Output HIGH  |
| Light receive           | ✗  | ✔   |
| Light receive indicator | ✗  | ☀   |
| Load resistance to L+   | ⚡  | ✗   |
| Load resistance to M    | ✗  | ⚡   |
|                         |  |  |

Truth table Push-pull: PNP/NPN – dark switching  $\bar{Q}$  (MultiMode 2)
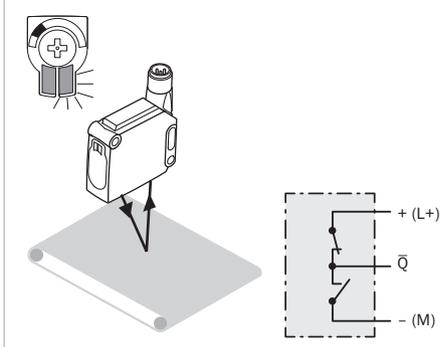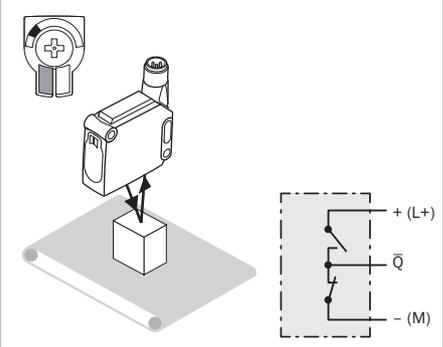
|                         | Dark switching $\bar{Q}$ (normally closed (upper switch), normally open (lower switch)) |   |
|-------------------------|---|---|
|                         | Object not present → Output HIGH  | Object present → Output LOW   |
| Light receive           | ✗   | ✔   |
| Light receive indicator | ✗   | ☀   |
| Load resistance to L+   | ✗   | ⚡   |
| Load resistance to M    | ⚡   | ✗   |
|                         |     |  |

Truth table Push-pull: PNP/NPN – dark switching  $\bar{Q}_{L1}$  (MultiMode 4)

|                         | Dark switching $\bar{Q}_{L1}$ (normally closed (upper switch), normally open (lower switch)) |                             |
|-------------------------|--|-----------------------------|
|                         | Object not present → Output HIGH   | Object present → Output LOW |
| Light receive           | ⊗  | ☑                           |
| Light receive indicator | ⊗  | ☀                           |
| Load resistance to L+   | ⊗  | ⚡                           |
| Load resistance to M    | ⚡  | ⊗                           |
|                         |  |                             |

Truth table Push-pull: PNP/NPN – light switching  $Q_{L1}$  (MultiMode 4)

|                         | Light switching $Q_{L1}$ (normally open (upper switch), normally closed (lower switch)) |                              |
|-------------------------|---|------------------------------|
|                         | Object not present → Output LOW   | Object present → Output HIGH |
| Light receive           | ⊗   | ☑                            |
| Light receive indicator | ⊗   | ☀                            |
| Load resistance to L+   | ⚡   | ⊗                            |
| Load resistance to M    | ⊗   | ⚡                            |
|                         |   |                              |

Truth table Push-pull: PNP/NPN – light switching  $Q_{L2}$  (MultiMode 4)


|                         | Light switching $Q_{L2}$ (normally open (upper switch), normally closed (lower switch)) |                              |
|-------------------------|---|------------------------------|
|                         | Object not present → Output LOW   | Object present → Output HIGH |
| Light receive           | ✗   | ✓                            |
| Light receive indicator | ✗   | ☀                            |
| Load resistance to L+   | ⚡   | ✗                            |
| Load resistance to M    | ✗   | ⚡                            |
|                         |   |                              |

Truth table Push-pull: PNP/NPN – dark switching  $\bar{Q}_{L2}$  (MultiMode 4)

|                         | Dark switching $\bar{Q}_{L2}$ (normally closed (upper switch), normally open (lower switch)) |                             |
|-------------------------|--|-----------------------------|
|                         | Object not present → Output HIGH   | Object present → Output LOW |
| Light receive           | ✗  | ✓                           |
| Light receive indicator | ✗  | ☀                           |
| Load resistance to L+   | ✗  | ⚡                           |
| Load resistance to M    | ⚡  | ✗                           |
|                         |  |                             |

### Characteristic curve Mode 1 and 6 combined


Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

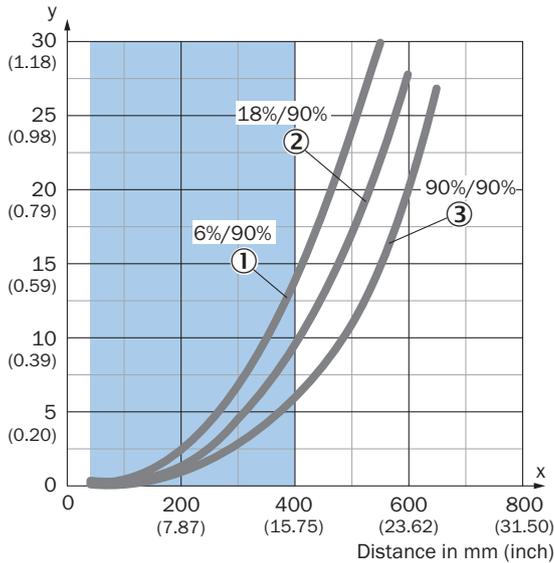

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor


Example:  
Safe suppression of the background

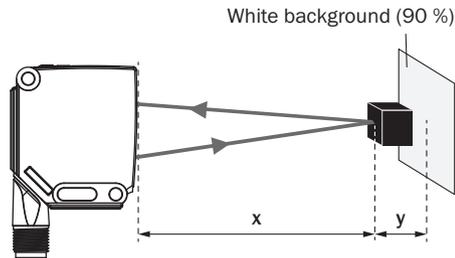

Black object (6 % remission)  
Set sensing range  $x = 200$  mm  
Needed minimum distance to white background  $y = 4$  mm

### Characteristic curve Mode 1, 3, 4, 5


Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

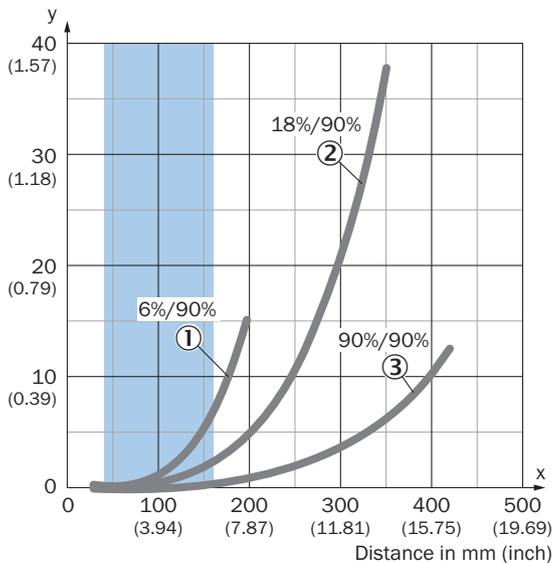

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor


Example:  
Safe suppression of the background

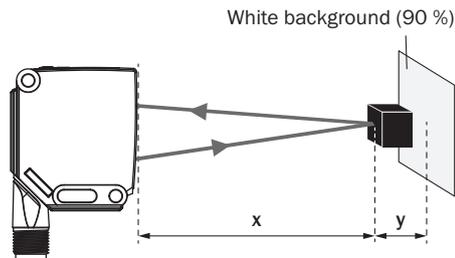

Black object (6 % remission)  
Set sensing range  $x = 140$  mm  
Needed minimum distance to white background  $y = 4$  mm

③ White object, 90% remission factor


### Characteristic curve Mode 2

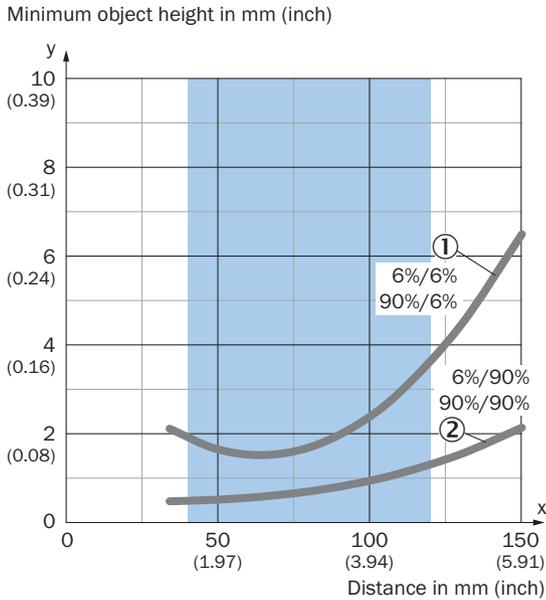

Recommended sensing range for the best performance


- ① Black background, 6% remission factor
- ② White background, 90% remission factor

Example:  
 Reliable detection of the object

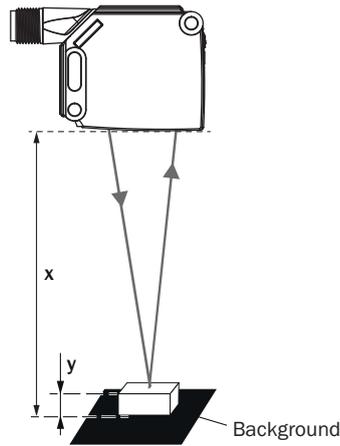


Black background (6 % remission factor)  
 Distance of sensor to background  $x = 90$  mm  
 Required minimum object height  $y = 2$  mm  
 For all objects regardless of their colors

### Light spot size Mode 1 and 6 combined

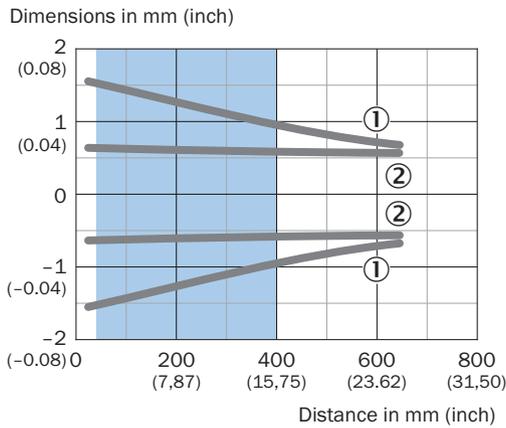


Recommended sensing range for the best performance

- ① Light spot horizontal
- ② Light spot vertical

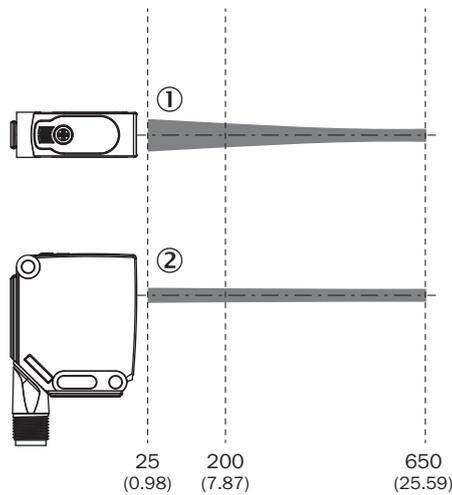


### Light spot size Mode 2

Dimensions in mm (inch)

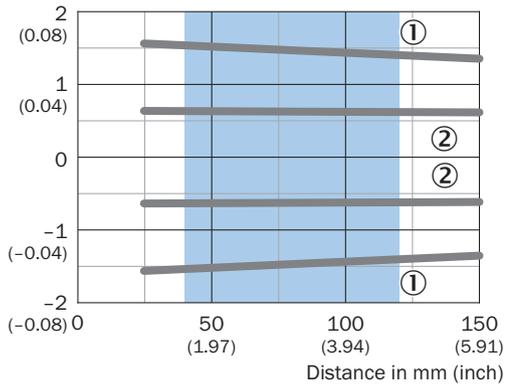


Recommended sensing range for the best performance

- ① Light spot horizontal
- ② Light spot vertical

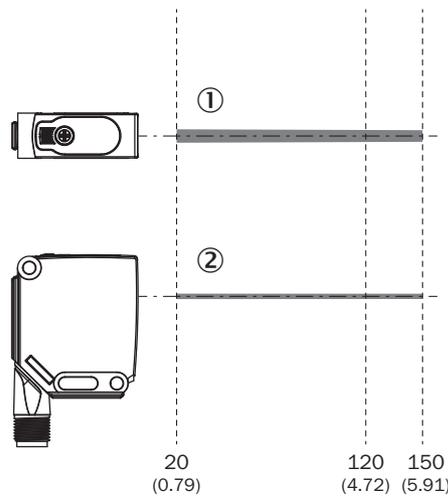


### Light spot size Mode 1, 3, 4, 5

Dimensions in mm (inch)

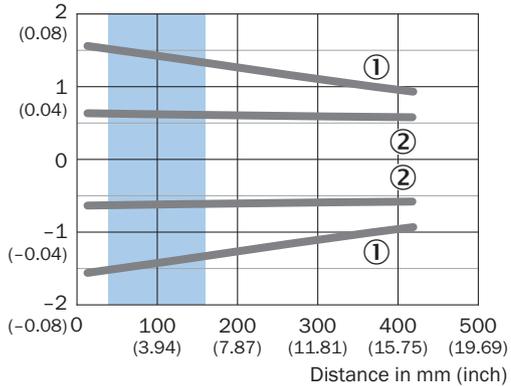


Recommended sensing range for the best performance

- ① Light spot horizontal
- ② Light spot vertical

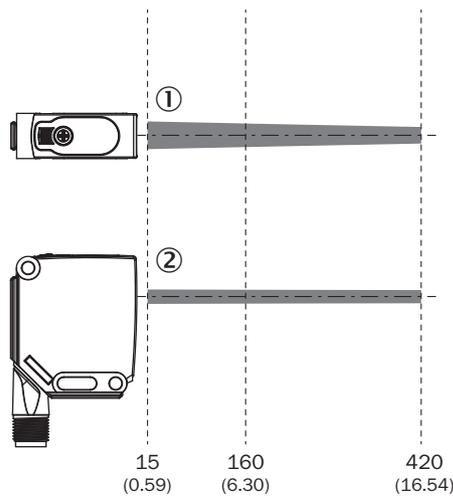


Sensing range diagram Mode 2

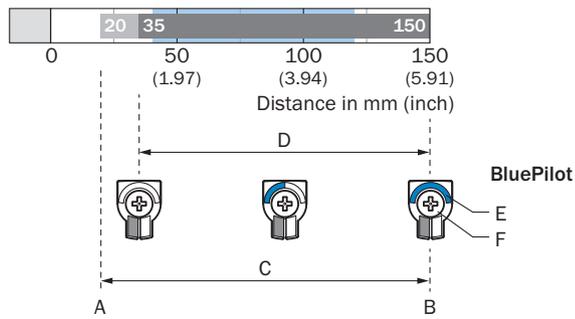

Recommended sensing range for the best performance

|   |   |
|---|---|
| A | Sensing range min. in mm                                  |
| B | Sensing range max. in mm                                  |
| C | Field of view   |
| D | Adjustable switching threshold for background suppression |
| E | Sensing range indicator                                   |
| F | Teach-Turn adjustment                                     |


Sensing range diagram Mode 1, 3, 4, 5

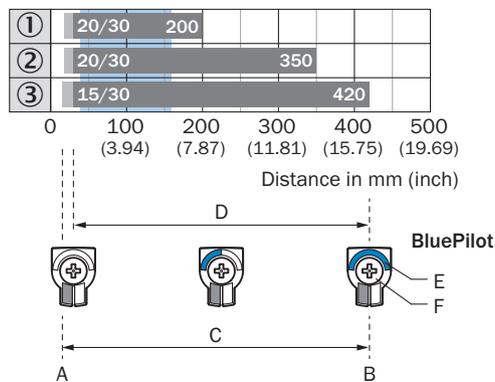

Recommended sensing range for the best performance

|   |   |
|---|---|
| 1 | Black object, 6% remission factor                         |
| 2 | Gray object, 18% remission factor                         |
| 3 | White object, 90% remission factor                        |
| A | Sensing range min. in mm                                  |
| B | Sensing range max. in mm                                  |
| C | Field of view   |
| D | Adjustable switching threshold for background suppression |
| E | Sensing range indicator                                   |
| F | Teach-Turn adjustment                                     |

Sensing range diagram Mode 1 and 6 combined

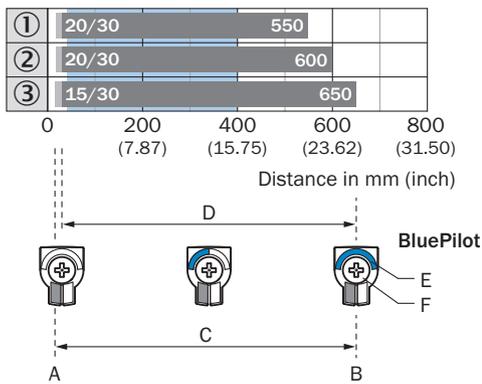

Recommended sensing range for the best performance

|   |   |
|---|---|
| 1 | Black object, 6% remission factor                         |
| 2 | Gray object, 18% remission factor                         |
| 3 | White object, 90% remission factor                        |
| A | Sensing range min. in mm                                  |
| B | Sensing range max. in mm                                  |
| C | Field of view   |
| D | Adjustable switching threshold for background suppression |
| E | Sensing range indicator                                   |
| F | Teach-Turn adjustment                                     |

### Recommended accessories

Other models and accessories → [www.sick.com/W12](http://www.sick.com/W12)

|   | Brief description  | Type               | part no. |
|---|--|--------------------|----------|
| <b>Mounting systems</b>   |  |                    |          |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Plate N03 for universal clamp bracket, zinc coated</li> <li><b>Material:</b> Steel, zinc diecast</li> <li><b>Details:</b> Zinc plated steel (sheet), Zinc die cast (clamping bracket)</li> <li><b>Items supplied:</b> Universal clamp (5322626), mounting hardware</li> <li><b>Usable for:</b> UC12, W14-2, W18-2, W18-3, W11-2, W12-3, W12-2 Laser, W12G, W12 Teflon, W16, W24-2 Ex, PowerProx, W11G-2, TranspaTect, W18-3 Ex, W24-2, PL50A, PL80A, PL40A, P250</li> </ul> | BEF-KHS-N03        | 2051609  |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Clamping block for dovetail mounting</li> <li><b>Material:</b> Aluminum</li> <li><b>Details:</b> Aluminum (anodised)</li> <li><b>Items supplied:</b> Mounting hardware included</li> <li><b>Suitable for:</b> W11-2, W12-3</li> </ul>   | BEF-KH-W12         | 2013285  |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Mounting bracket, large</li> <li><b>Material:</b> Stainless steel</li> <li><b>Details:</b> Stainless steel</li> <li><b>Items supplied:</b> Mounting hardware included</li> <li><b>Suitable for:</b> W11-2, W12-3, W16</li> </ul>  | BEF-WG-W12         | 2013942  |
|   | <ul style="list-style-type: none"> <li><b>Material:</b> Aluminum</li> <li><b>Details:</b> Aluminum</li> <li><b>Items supplied:</b> Including mounting material (sensor) and mounting material (bracket)</li> <li><b>Usable for:</b> Adapter plate for W23L/W27L to W12L</li> </ul>   | BEF-AP-W12         | 2127742  |
| <b>connectors and cables</b>  |  |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PVC</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with chemicals, Uncontaminated zones</li> </ul>  | YF2A14-050VB3XLEAX | 2096235  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PUR, halogen-free</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>   | YF2A14-050UB3XLEAX | 2095608  |

|   | Brief description | Type             | part no. |
|---|-------------------|------------------|----------|
| network devices   |                   |                  |          |
|    |                   | SIG300-0A0GAA100 | 1131014  |
|    |                   | SIG300-0A04AA100 | 1131011  |
|   |                   | SIG300-0A05AA100 | 1131012  |
|  |                   | SIG300-0A06AA100 | 1131013  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)