

PLANONLIGHT LED 10W pro

Focused light in a compact design.



hagnleone
LIGHTING

EN DATA SHEET

Please read installation instructions carefully before commissioning!

PLANONLIGHT LED 10W pro
Artikel Nr. 20444



Hagnleone GmbH

Bobletten 36
6850 Dornbirn, Austria
T +43 (0) 5572 394440
F +43 (0) 5572 394841
leuchten@hagnleone.at


www.hagnleone.at

TECHNICAL DATA: (These are typical values which can deviate in series production)


| Type designation: | L x W x H: | Operating voltage: | Power: | Illuminated area: | Temperature range: | Weight: | Light colour: |
|---------------------|---------------------|--------------------|--------|-------------------|--------------------|---------|-----------------|
| PLANONLIGHT LED 10W | 310 x 58 x 16.5 mm* | 22 VDC - 26 VDC | 10 W | 201 x 30 mm/22° | -20 °C bis +55 °C | 0.67 kg | 6,000 - 6,500 K |

* Without M12 Stecker.


PLANONLIGHT LED DIMENSIONS:

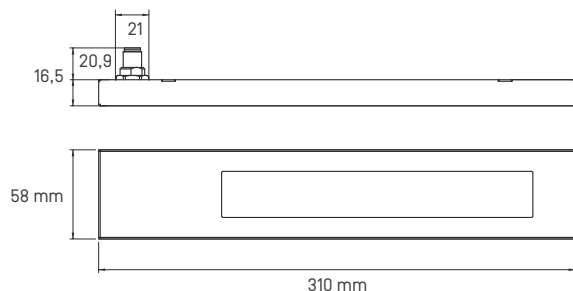

FIXING CENTRES WITHOUT LAMP HOLDER:

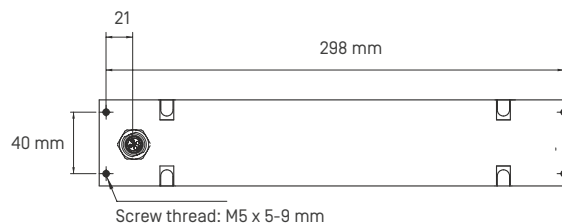

CABLE CONNECTION - M12 PLUG CONNECTION:



#1 = +24 VDC
#2 = 0 VDC
yellow/green

Flexible connection cable:
3 x 0.75 mm² (AWG 18)
L = ca. 3 m
Ø = 5.9 +/- 0.2 mm



#3 = 0 VDC
#4 = +24 VDC
#5 = functional earth

pins = male

Direct connection to the mains voltage damages the lamp!

WICHTIGE HINWEISE:

Installation via the four fixing centres.

Keep lamp wire as short as possible.

The plug must not be opened (marking with sealing wax).
If the sealing wax is broken, the warranty expires.

The lamp is suitable for direct mounting on normal flammable surfaces.

RoHs compliant, observe WEEE directive for waste electrical and electronic equipment.

Standards: IEC 60598-1, IEC 60598-2-1, UL 2108, UL 8750

Technology-dependent differences in brightness of +/- 5 % common.

Checked with commercially available lubricants in turning and milling centres.

For more information about tooling machine lamps see:

www.hagnleone.at

