


Betriebsdruck max. 12 bar
 Temperaturbereich -20°C bis 130°C



16.0963

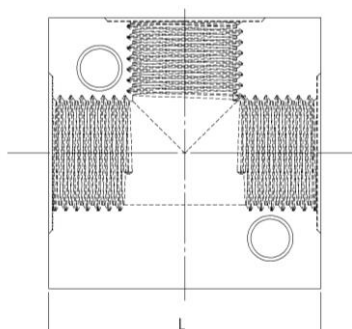


T-Verteiler, anflanschbar

Artikel Nr.	Typen Nr.	Gewinde	SW mm	L mm
112589	16.0963	G 3/8 IG	25	40,0
112590	16.0964	G 1/2 IG	30	50,0
129676	16.0965	G 1/8 IG	16	25,0
129677	16.0966	G 1/4 IG	20	40,0



16.0973



Kreuz-Verteiler, anflanschbar

Artikel Nr.	Typen Nr.	Gewinde	SW mm	L mm
112594	16.0973	G 3/8 IG	25	40,0
112595	16.0974	G 1/2 IG	30	50,0
129678	16.0975	G 1/8 IG	16	25,0
129679	16.0976	G 1/4 IG	20	40,0