


Aus Vulkanfiber.

Temperaturbereich 0 bis 105 °C



258.04/1

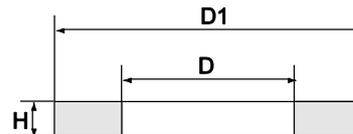

Dichtringe aus Vulkanfiber						
Artikel Nr.	Ident Nr.	für Gewinde	D mm	D1 mm	H mm	Toleranzen mm
258.00	114081	M5	5,1	8,0	1,0	± 0,1
258.01	114082	G 1/8	10,0	13,0	1,5	± 0,15
258.02	114083	G 1/4	13,2	18,0	1,5	± 0,15
258.03	114084	G 3/8	16,8	22,0	1,5	± 0,15
258.04	114085	G 1/2	21,0	28,0	2,0	± 0,2
258.04/1	114086	G 3/4	26,5	33,0	2,0	± 0,2
258.04/2	114087	G 1	33,3	38,9	2,0	± 0,2