



# WTB4SP-1GE11120ZZZ

## W4

PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

| Type               | part no. |
|--------------------|----------|
| WTB4SP-1GE11120ZZZ | 1132088  |

Other models and accessories → [www.sick.com/W4](http://www.sick.com/W4)

Detailed technical data

Features

|                                                                                                 |                                                                                       |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Functional principle                                                                            | Photoelectric proximity sensor                                                        |
| Functional principle detail                                                                     | Background suppression                                                                |
| Sensing range                                                                                   |                                                                                       |
| Sensing range min.                                                                              | 4 mm                                                                                  |
| Sensing range max.                                                                              | 250 mm                                                                                |
| Adjustable switching threshold for background suppression                                       | 10 mm ... 250 mm                                                                      |
| Reference object                                                                                | Object with 90% remission factor (complies with standard white according to DIN 5033) |
| Minimum distance between set sensing range and background (black 6% / white 90%)                | 5 mm, at a distance of 150 mm                                                         |
| Recommended sensing range for the best performance                                              | 40 mm ... 170 mm                                                                      |
| Emitted beam                                                                                    |                                                                                       |
| Light source                                                                                    | PinPoint LED                                                                          |
| Type of light                                                                                   | Visible red light                                                                     |
| Shape of light spot                                                                             | Point-shaped                                                                          |
| Light spot size (distance)                                                                      | 4 mm (150 mm)                                                                         |
| Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) | < +/- 1.5° (at Ta = +23 °C)                                                           |
| Key LED figures                                                                                 |                                                                                       |
| Normative reference                                                                             | EN 62471:2008-09   IEC 62471:2006, modified                                           |
| LED risk group marking                                                                          | Free group                                                                            |
| Wave length                                                                                     | 635 nm                                                                                |
| Average service life                                                                            | 100,000 h at Ta = +25 °C                                                              |
| Smallest detectable object (MDO) typ.                                                           |                                                                                       |

|                   |                       |                                                                                              |
|-------------------|-----------------------|----------------------------------------------------------------------------------------------|
|                   |                       | 0.2 mm (At 180 mm distance)                                                                  |
|                   |                       | Object with 90% remission factor (complies with standard white according to DIN 5033)        |
| <b>Adjustment</b> |                       |                                                                                              |
|                   | Teach-Turn adjustment | BluePilot: For setting the sensing range                                                     |
| <b>Display</b>    |                       |                                                                                              |
|                   | LED blue              | BluePilot: sensing range indicator                                                           |
|                   | LED green             | Operating indicator<br>Static on: power on                                                   |
|                   | LED yellow            | Status of received light beam<br>Static on: object present<br>Static off: object not present |

### Safety-related parameters

|                         |             |
|-------------------------|-------------|
| <b>MTTF<sub>D</sub></b> | 1,404 years |
| <b>DC<sub>avg</sub></b> | 0%          |

### Electronics

|                                     |                                  |                                                                                |
|-------------------------------------|----------------------------------|--------------------------------------------------------------------------------|
| <b>Supply voltage U<sub>B</sub></b> |                                  | 10 V DC ... 30 V DC <sup>1)</sup>                                              |
| <b>Ripple</b>                       |                                  | ≤ 5 V <sub>pp</sub>                                                            |
| <b>Usage category</b>               |                                  | DC-12 (According to EN 60947-5-2)<br>DC-13 (According to EN 60947-5-2)         |
| <b>Current consumption</b>          |                                  | ≤ 20 mA, without load. At U <sub>B</sub> = 24 V                                |
| <b>Protection class</b>             |                                  | III                                                                            |
| <b>Digital output</b>               |                                  |                                                                                |
|                                     | Number                           | 1                                                                              |
|                                     | Type                             | NPN                                                                            |
|                                     | Switching mode                   | Light switching                                                                |
|                                     | Signal voltage NPN HIGH/LOW      | Approx. U <sub>B</sub> / < 2.5 V                                               |
|                                     | Output current I <sub>max.</sub> | ≤ 100 mA                                                                       |
|                                     | Circuit protection outputs       | Reverse polarity protected<br>Overcurrent protected<br>Short-circuit protected |
|                                     | Response time                    | ≤ 500 μs                                                                       |
|                                     | Repeatability (response time)    | 150 μs                                                                         |
|                                     | Switching frequency              | 1,000 Hz                                                                       |
| <b>Pin/Wire assignment</b>          |                                  |                                                                                |
|                                     | Function of pin 4/black (BK)     | Digital output, light switching, object present → output Q LOW                 |

<sup>1)</sup> Limit values.

### Mechanics

|                               |                             |
|-------------------------------|-----------------------------|
| <b>Housing</b>                | Rectangular                 |
| <b>Design detail</b>          | Slim                        |
| <b>Dimensions (W x H x D)</b> | 12.1 mm x 41.9 mm x 18.6 mm |
| <b>Connection</b>             | Cable, 3-wire, 2 m          |
| <b>Connection detail</b>      |                             |

|                                                       |                        |
|-------------------------------------------------------|------------------------|
| Deep-freeze property                                  | Do not bend below 0 °C |
| Conductor size                                        | 0.14 mm <sup>2</sup>   |
| Cable diameter                                        | Ø 3.4 mm               |
| Length of cable (L)                                   | 2 m                    |
| <b>Material</b>                                       |                        |
| Housing                                               | Plastic, VISTAL®       |
| Front screen                                          | Plastic, PMMA          |
| Cable                                                 | Plastic, PVC           |
| <b>Maximum tightening torque of the fixing screws</b> | 0.4 Nm                 |

#### Ambient data

|                                            |                                                                                                   |
|--------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Enclosure rating</b>                    | IP66 (EN 60529)<br>IP67 (EN 60529)                                                                |
| <b>Ambient operating temperature</b>       | -40 °C ... +60 °C                                                                                 |
| <b>Ambient temperature, storage</b>        | -40 °C ... +75 °C                                                                                 |
| <b>Typ. Ambient light immunity</b>         | Artificial light: ≤ 50,000 lx<br>Sunlight: ≤ 50,000 lx                                            |
| <b>Shock resistance</b>                    | 30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27)) |
| <b>Vibration resistance</b>                | 10 Hz ... 1,000 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))                                     |
| <b>Air humidity</b>                        | 35 % ... 95 %, relative humidity (no condensation)                                                |
| <b>Electromagnetic compatibility (EMC)</b> | EN 60947-5-2                                                                                      |
| <b>Resistance to cleaning agent</b>        | ECOLAB                                                                                            |
| <b>UL File No.</b>                         | NRKH.E181493 & NRKH7.E181493                                                                      |

#### Certificates


|                                           |   |
|-------------------------------------------|---|
| <b>EU declaration of conformity</b>       | ✓ |
| <b>UK declaration of conformity</b>       | ✓ |
| <b>ACMA declaration of conformity</b>     | ✓ |
| <b>Moroccan declaration of conformity</b> | ✓ |
| <b>China-RoHS</b>                         | ✓ |
| <b>cULus certificate</b>                  | ✓ |

#### Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270904 |
| <b>ECLASS 5.1.4</b> | 27270904 |
| <b>ECLASS 6.0</b>   | 27270904 |
| <b>ECLASS 6.2</b>   | 27270904 |
| <b>ECLASS 7.0</b>   | 27270904 |
| <b>ECLASS 8.0</b>   | 27270904 |
| <b>ECLASS 8.1</b>   | 27270904 |
| <b>ECLASS 9.0</b>   | 27270904 |
| <b>ECLASS 10.0</b>  | 27270904 |
| <b>ECLASS 11.0</b>  | 27270904 |


|                       |          |
|-----------------------|----------|
| <b>ECLASS 12.0</b>    | 27270903 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

## display and adjustment elements

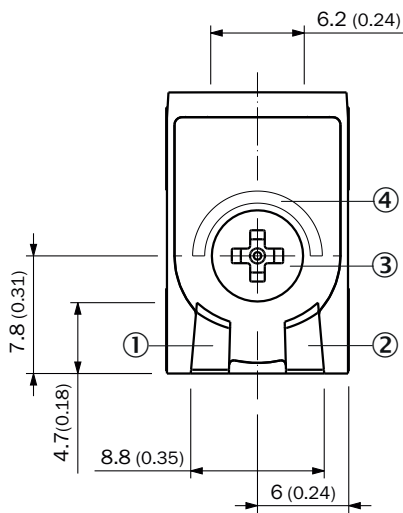


- ① LED green
- ② LED yellow
- ③ Teach-Turn adjustment
- ④ LED blue



## Connection type Cable, 3-wire



## Connection diagram Cd-043




Truth table NPN - light switching Q
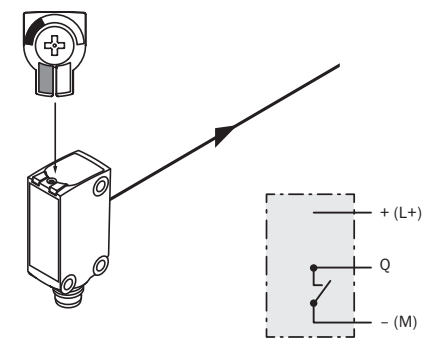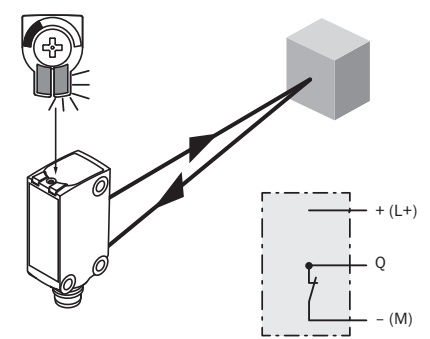
|                         | Light switching Q (normally open)                                                  |                                                                                     |
|-------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                         | Object not present → Output HIGH                                                   | Object present → Output LOW                                                         |
| Light receive           | ✗                                                                                  | ✓                                                                                   |
| Light receive indicator | ✗                                                                                  | ☀                                                                                   |
| Load resistance         | ✗                                                                                  | ⚡                                                                                   |
|                         |  |  |

Characteristic curve


Minimum distance in mm (y) between the set sensing range and white background (90 % remission factor)

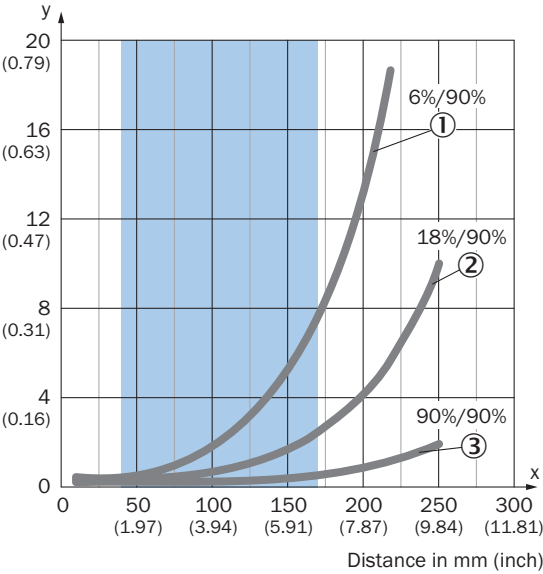

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor


Example:  
Safe suppression of the background

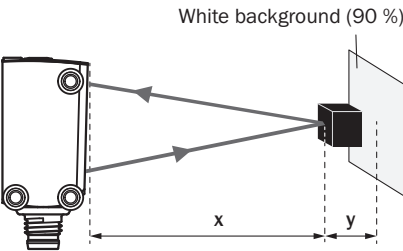

Black object (6 % remission factor)  
Set sensing range x = 150 mm  
Needed minimum distance to white background y = 5.5 mm


## Light spot size

Dimensions in mm (inch)

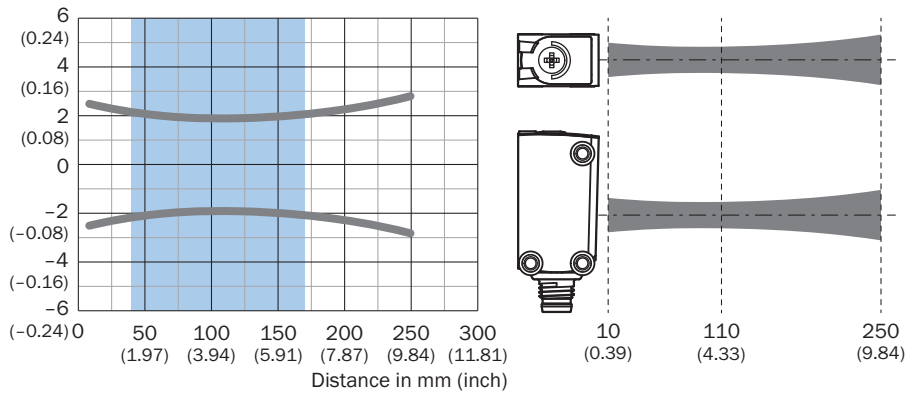

Recommended sensing range for the best performance


## Sensing range diagram

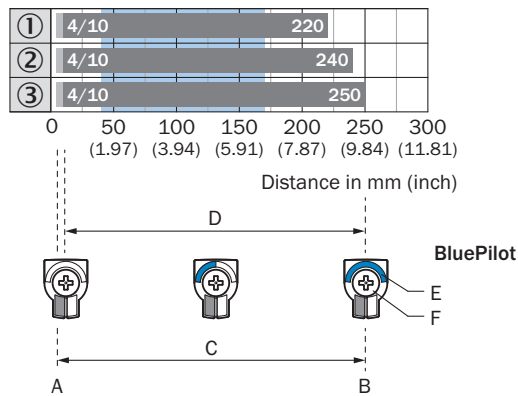

Recommended sensing range for the best performance

| 1 | Black object, 6% remission factor                         |
|---|-----------------------------------------------------------|
| 2 | Gray object, 18% remission factor                         |
| 3 | White object, 90% remission factor                        |
| A | Sensing range min. in mm                                  |
| B | Sensing range max. in mm                                  |
| C | Field of view                                             |
| D | Adjustable switching threshold for background suppression |
| E | Sensing range indicator                                   |
| F | Teach-Turn adjustment                                     |

Dimensional drawing, sensor

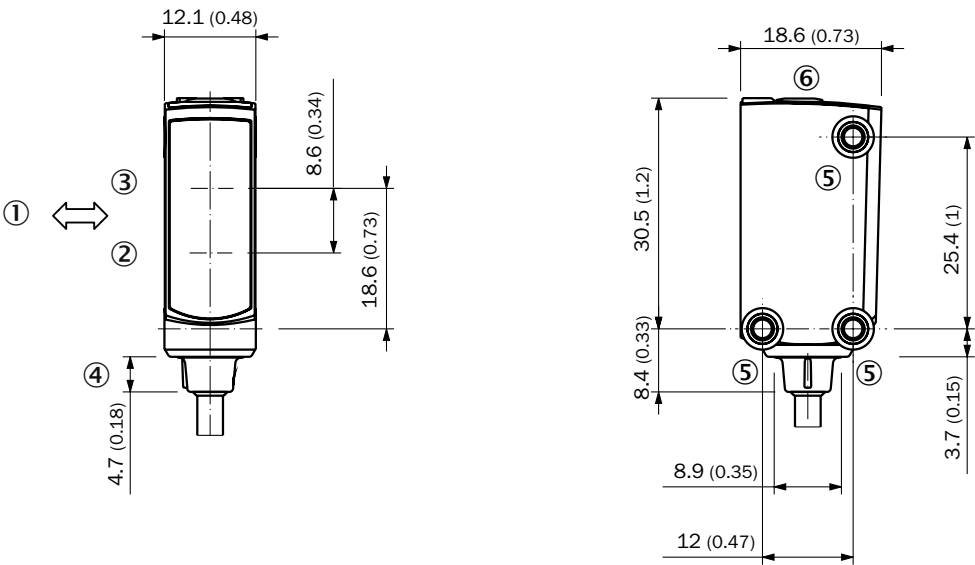


Dimensions in mm (inch)

- ① Standard direction of the material being detected
- ② Center of optical axis, receiver
- ③ Center of optical axis, sender
- ④ Connection
- ⑤ M3 mounting hole
- ⑥ display and adjustment elements

Recommended accessories

Other models and accessories → [www.sick.com/W4](http://www.sick.com/W4)

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Type        | part no. |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| Mounting systems                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |          |
|  | <ul style="list-style-type: none"><li>• <b>Material:</b> Stainless steel</li><li>• <b>Details:</b> Stainless steel (1.4301)</li><li>• <b>Suitable for:</b> W4S, W4S</li></ul>                                                                                                                                                                                                                                                                                                                                                                      | BEF-WN-G6   | 2062909  |
|  | <ul style="list-style-type: none"><li>• <b>Description:</b> Plate N08 for universal clamp bracket</li><li>• <b>Material:</b> Steel, zinc diecast</li><li>• <b>Details:</b> Zinc plated steel (sheet), Zinc die cast (clamping bracket)</li><li>• <b>Items supplied:</b> Universal clamp (5322626), mounting hardware</li><li>• <b>Usable for:</b> W100, W150, W4S, W4F, W8, W9-3, W8G, W8 Laser, W8 Inox, G6, W100 Laser, W100-2, W10, G6 Inox, RAY10, W4SLG-3, W9, GR18, MultiPulse, Reflex Array, MultiLine, LUT3, KT5, KT8, KT10, CS8</li></ul> | BEF-KHS-N08 | 2051607  |
| connectors and cables                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |          |
|  | <ul style="list-style-type: none"><li>• <b>Connection type head A:</b> Male connector, M8, 3-pin, straight, A-coded</li><li>• <b>Description:</b> Unshielded</li><li>• <b>Connection systems:</b> Screw-type terminals</li><li>• <b>Permitted cross-section:</b> 0.14 mm² ... 0.5 mm²</li></ul>                                                                                                                                                                                                                                                    | STE-0803-G  | 6037322  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)