



S30B-3011BA s300

SAFETY LASER SCANNERS



NOIS NOIS

Ordering information

| Туре | part no. |
|-------------|----------|
| S30B-3011BA | 1056427 |

Other models and accessories → www.sick.com/S300

Illustration may differ



Detailed technical data

Features

| Product version | S300 Standard |
|--------------------------------|------------------------------------|
| Model | Sensor without system plug |
| Application | Indoor |
| Protective field range | 3 m |
| Warning field range | 8 m (at 15 % reflectivity) |
| Distance measuring range | 30 m |
| Type of field set | Triple field sets |
| Number of field sets | 1 |
| Number of fields | 3 |
| Number of monitoring cases | 1 |
| Scanning angle | 270° |
| Resolution (can be configured) | 30 mm, 40 mm, 50 mm, 70 mm, 150 mm |
| Angular resolution | 0.5° |
| Response time | 80 ms ¹⁾ |
| Protective field supplement | 100 mm |
| Number of multiple samplings | 2 16, configurable |
| Delay of automatic reset | 2 s 60 s, configurable |

 $^{^{1)}}$ Depending on basic response time and multiple sampling.

Safety-related parameters

| Туре | Type 3 (IEC 61496) |
|------------------------|--------------------|
| Safety integrity level | SIL 2 (IEC 61508) |

| Category | Category 3 (EN ISO 13849) |
|---|--|
| Performance level | PL d (EN ISO 13849) |
| $\ensuremath{PFH_D}$ (mean probability of a dangerous failure per hour) | 8.0 x 10 ⁻⁸ |
| T _M (mission time) | 20 years (EN ISO 13849) |
| Safe state in the event of a fault | At least one OSSD is in the OFF state. |

Functions

| Restart interlock | ✓ |
|--|------------|
| External device monitoring (EDM) | ✓ |
| Multiple sampling | ✓ |
| Contour as a reference | ✓ |
| Integrated configuration memory | ✓ |
| Measured data output | Via RS-422 |
| Safe SICK device communication via EFI | ✓ |

Interfaces

| Connection type | System plug with or without connecting cable |
|---|---|
| Universal I/Os | 5 ¹⁾ |
| Inputs | |
| External device monitoring (EDM) | 1 ²⁾ |
| Reset/restart | 1 ²⁾ |
| Standby | 1 |
| Outputs | |
| OSSD pairs | 1 |
| Application diagnostic outputs | 3 ³⁾ |
| Configuration method | PC with CDS (Configuration and Diagnostic Software) |
| Configuration and diagnostics interface | RS-232 |
| Transmission rate | 38.4 kBaud |
| Data interface | RS-422 |
| Transmission rate | ≤ 500 kBaud |
| Safe SICK device communication via EFI | |
| Transmission rate | ≤ 500 kBaud |
| Length of cable | ≤ 50 m |
| Conductor cross section | 0.22 mm ² |

 $^{^{1)}}$ Freely programmable, e.g., external device monitoring input, reset input, contamination warning, reset required.

Electronics

| Protection class | III (EN 50178, EN 60950) |
|------------------|--------------------------|

 $^{^{1)}}$ At 24 V DC without output load.

²⁾ Availability depends on the configuration of the universal I/Os.

³⁾ Freely programmable, e.g. warning field, contamination, reset required.

²⁾ At 24 V DC including maximum output load.

³⁾ Freely programmable, e.g. warning field, contamination, reset required.

SAFETY LASER SCANNERS

| Supply voltage V _s | 24 V DC (16.8 V DC 30 V DC) |
|---|------------------------------|
| Power consumption | 0.33 A $^{1)}$ 1.7 A $^{2)}$ |
| Outputs | |
| Output signal switching devices (OSSDs) | 2 x 250 mA |
| Application diagnostic outputs | 3 x 100 mA ³⁾ |

¹⁾ At 24 V DC without output load.

Mechanics

| Dimensions (W x H x D) | 102 mm x 152 mm x 106 mm |
|-----------------------------|--|
| Weight | 1.2 kg |
| Housing material | Aluminum die cast |
| Housing color | RAL 1021 (yellow) |
| Optics cover material | Polycarbonate |
| Optics cover surface finish | Outside with scratch-resistant coating |

Ambient data

| Enclosure rating | IP65 (EN 60529) |
|-------------------------------|---|
| Ambient operating temperature | -10 °C +50 °C |
| Storage temperature | -25 °C +50 °C |
| Vibration resistance | IEC 60068-2-6, IEC 60068-2-64, IEC 60721-3-5, IEC TR 60721-4-5, IEC 61496-3 |
| Class | 5M1 (IEC 60721-3-5) |
| Shock resistance | IEC 60068-2-27, IEC 60721-3-5, IEC TR 60721-4-5, IEC 61496-3 |
| Class | 5M1 (IEC 60721-3-5) |
| Continuous shock | 50 m/s², 11 ms |
| | 100 m/s², 16 ms |

Other information

| Type of light | Pulsed laser diode |
|-----------------------------|---|
| Wave length | 905 nm |
| Detectable remission factor | 1.8 % > 1,000 %, reflectors |
| Laser class | 1 (21 CFR 1040.10 and 1040.11, IEC 60825-1) |

Certificates

| EU declaration of conformity | ✓ |
|---|----------|
| UK declaration of conformity | ✓ |
| ACMA declaration of conformity | ✓ |
| China RoHS | ✓ |
| cULus certificate | ✓ |
| EC-Type-Examination approval | ✓ |
| China GB certificate | ✓ |
| Information according to Art. 3 of Data Act (Regulation EU 2023/2854) | ✓ |


²⁾ At 24 V DC including maximum output load.

³⁾ Freely programmable, e.g. warning field, contamination, reset required.

Classifications


| ECLASS 5.0 | 27272705 |
|----------------|----------|
| ECLASS 5.1.4 | 27272705 |
| ECLASS 6.0 | 27272705 |
| ECLASS 6.2 | 27272705 |
| ECLASS 7.0 | 27272705 |
| ECLASS 8.0 | 27272705 |
| ECLASS 8.1 | 27272705 |
| ECLASS 9.0 | 27272705 |
| ECLASS 10.0 | 27272705 |
| ECLASS 11.0 | 27272705 |
| ECLASS 12.0 | 27272705 |
| ETIM 5.0 | EC002550 |
| ETIM 6.0 | EC002550 |
| ETIM 7.0 | EC002550 |
| ETIM 8.0 | EC002550 |
| UNSPSC 16.0901 | 39121528 |

Dimensional drawing Scan plane origin

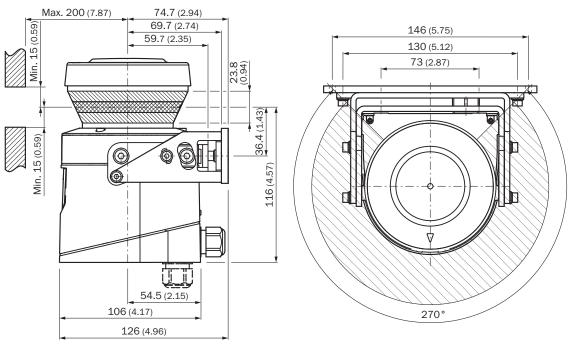


Dimensions in mm (inch)

Dimensional drawing Laser scanner

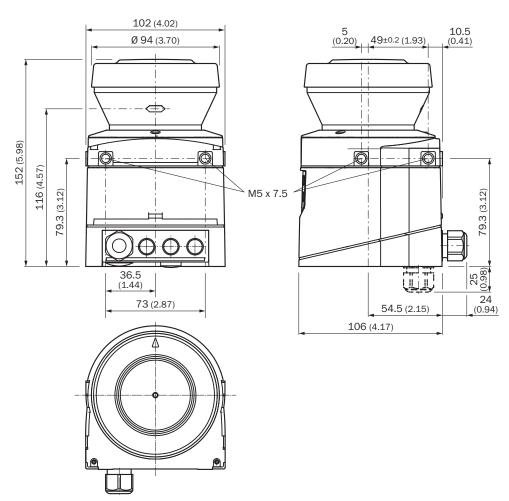

Dimensions in mm (inch)

Connection diagram S300 Standard with restart interlock and external device monitoring

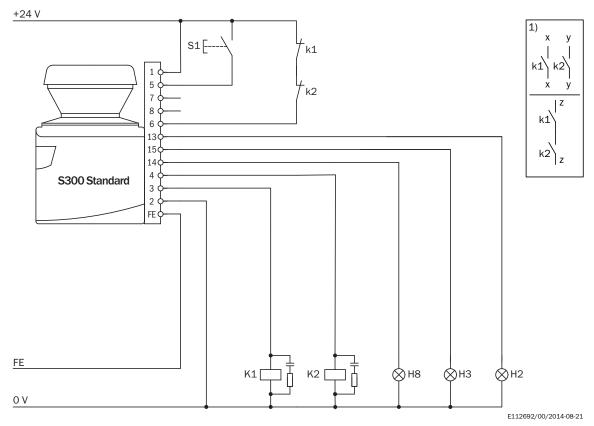

Comments

1) Output circuits: These contacts are to be connected to the controller such that, with the output circuit open, the dangerous state is disabled. For categories 4 and 3, the integration must be dual-channel (x/y paths). Single-channel integration in the control (z path) is only possible with a single-channel control and taking the risk analysis into account.

Recommended accessories

Other models and accessories → www.sick.com/S300

| | Brief description | Туре | part no. | | |
|-----------------------|---|----------------------|----------|--|--|
| Mounting systems | | | | | |
| | Description: Mounting bracket for rear mounting on wall or machine Packing unit: 1 piece | Mounting kit 1a | 2034324 | | |
| R | Description: Mounting bracket for rear mounting on wall or machine with protection of optics hood Packing unit: 1 piece | Mounting kit 1b | 2034325 | | |
| | Description: Mounting bracket, adjustable lateral axis, only in conjunction with mounting kit 1a (2034324) or 1b (2034325) Packing unit: 1 piece | Mounting kit 2 | 2039302 | | |
| | Description: Mounting plate, adjustable longitudinal axis, only in conjunction with mounting kit 2 (2039302) Packing unit: 1 piece | Mounting kit 3 | 2039303 | | |
| connectors and cables | | | | | |
| The second | Connection type head A: Male connector, M8, 4-pin, straight Connection type head B: Male connector, USB-A, straight Cable: 2 m, 4-wire, PVC Description: Unshielded | DSL-8U04G02M025KM: | 6034574 | | |
| The section | Connection type head A: Male connector, M8, 4-pin, straight Connection type head B: Male connector, USB-A, straight Cable: 10 m, 4-wire, PVC Description: Unshielded | DSL-8U04G10M025KM: | 6034575 | | |
| | Connection type head A: Flying leads Connection type head B: Flying leads Items supplied: By the meter Cable: 15-wire, AWG20, PVC Description: Unshielded Note: On 100 m reel | Connecting cable | 6030795 | | |
| 0 | Connection type head A: Flying leads Connection type head B: Flying leads Items supplied: By the meter Cable: 2-wire, twisted pair, 120 0hm, PVC Description: Shielded Note: Fitting for EFI connections | EFI connecting cable | 6029448 | | |

| | Brief description | Туре | part no. | |
|------------------------------------|---|-------------|----------|--|
| system plugs and extension modules | | | | |
| 10 | Description: Without cable, For S300 Standard, Advanced, Expert and ProfessionalNot for use of incremental encoders, integrated configuration storage | SX0B-A0000G | 2032807 | |
| | Cable: 14 m, 11-wire, PVC Description: Pre-assembled, unshielded, For S300 standardNot for use of incremental encoders, integrated configuration storage Connection systems: Flying leads | SXOB-B1114G | 2047875 | |
| | Cable: 5 m, 11-wire, PVC Description: Pre-assembled, unshielded, For S300 standardNot for use of incremental encoders, integrated configuration storage Connection systems: Flying leads | SX0B-B1105G | 2032859 | |
| | Cable: 10 m, 11-wire, PVC Description: Pre-assembled, unshielded, For S300 standardNot for use of incremental encoders, integrated configuration storage Connection systems: Flying leads | SX0B-B1110G | 2032860 | |
| | Cable: 20 m, 11-wire, PVC Description: Pre-assembled, unshielded, For S300 standardNot for use of incremental encoders, integrated configuration storage Connection systems: Flying leads | SX0B-B1120G | 2032861 | |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

