Data sheet

S30B-3011GB

S300

SAFETY LASER SCANNERS

SICK
Sensor Intelligence.

Illustration may differ

Ordering information

Type	part no.
S30B-3011GB	1057641

Other models and accessories ➜ www.sick.com/S300

Detailed technical data

Features

Product version	S300 Expert
Model	Sensor without system plug
Application	Indoor
Protective field range	3 m
Warning field range	8 m (at 15 % reflectivity)
Distance measuring range	30 m
Type of field set	Triple field sets
Number of field sets	16
Number of fields	48
Number of monitoring cases	32 [1]
Scanning angle	270°
Resolution (can be configured)	30 mm, 40 mm, 50 mm, 70 mm, 150 mm
Angular resolution	0.5°
Response time	80 ms [2]
Protective field supplement	100 mm
Number of multiple samplings	2 ... 16, configurable
Delay of automatic reset	2 s ... 60 s, configurable

[1] In combination with an additional static input via EFI or using the dynamic inputs on the device. Otherwise eight.
[2] Depending on basic response time and multiple sampling.

Safety-related parameters

Type	Type 3 (IEC 61496)

Safety integrity level	SIL 2 (IEC 61508)
Category	Category 3 (EN ISO 13849)
Performance level	PL d (EN ISO 13849)
PFH_D (mean probability of a dangerous failure per hour)	8.0×10^{-8}
T_M (mission time)	20 years (EN ISO 13849)
Safe state in the event of a fault	At least one OSSD is in the OFF state.

Functions

Restart interlock	✓
External device monitoring (EDM)	✓
Multiple sampling	✓
Monitoring case switching	✓
Static protective field switching	✓
Dynamic protective field switching	✓
Contour as a reference	✓
Integrated configuration memory	✓
Safe SICK device communication via EFI	✓

Interfaces

Connection type	System plug with or without connecting cable
Universal I/Os	5 [1]
Inputs	
External device monitoring (EDM)	1 [2]
Reset/restart	1 [2]
Static control inputs	3 [3]
Static control inputs with EFI	5 [4]
Dynamic control inputs (incremental encoder)	2 [5]
Standby	1
Outputs	
OSSD pairs	1
Application diagnostic outputs	3 [6]
Configuration method	PC with CDS (Configuration and Diagnostic Software)
Configuration and diagnostics interface	RS-232
Transmission rate	38.4 kBaud
Data interface	RS-422
Transmission rate	≤ 500 kBaud
Safe SICK device communication via EFI	

[1] Freely programmable, e.g., external device monitoring input, reset input, contamination warning, reset required.
[2] Availability depends on the configuration of the universal I/Os.
[3] 2+1; additional input is only available if reset and reset required are not being used.
[4] In combination with an EFI device (Flexi Soft or EFI gateway) five static control inputs are available. Otherwise three.
[5] Two of the static swichting signals can be used either as dynamic or as static switching signals.
[6] Freely programmable, e.g. warning field, contamination, reset required.

Transmission rate	≤ 500 kBaud
Length of cable	≤ 50 m
Conductor cross section	0.22 mm²

[1] Freely programmable, e.g., external device monitoring input, reset input, contamination warning, reset required.
[2] Availability depends on the configuration of the universal I/Os.
[3] 2+1; additional input is only available if reset and reset required are not being used.
[4] In combination with an EFI device (Flexi Soft or EFI gateway) five static control inputs are available. Otherwise three.
[5] Two of the static swichting signals can be used either as dynamic or as static switching signals.
[6] Freely programmable, e.g. warning field, contamination, reset required.

Electronics

Protection class	III (EN 50178, EN 60950)
Supply voltage V_s	24 V DC (16.8 V DC ... 30 V DC)
Power consumption	0.33 A [1] 1.7 A [2]
Outputs	
Output signal switching devices (OSSDs)	2 x 250 mA
Application diagnostic outputs	3 x 100 mA [3]

[1] At 24 V DC without output load.
[2] At 24 V DC including maximum output load.
[3] Freely programmable, e.g. warning field, contamination, reset required.

Mechanics

Dimensions (W x H x D)	102 mm x 152 mm x 106 mm
Weight	1.2 kg
Housing material	Aluminum die cast
Housing color	RAL 1021 (yellow)
Optics cover material	Polycarbonate
Optics cover surface finish	Outside with scratch-resistant coating

Ambient data

Enclosure rating	IP65 (EN 60529)
Ambient operating temperature	–10 °C ... +50 °C
Storage temperature	–25 °C ... +50 °C
Vibration resistance	IEC 60068-2-6, IEC 60068-2-64, IEC 60721-3-5, IEC TR 60721-4-5, IEC 61496-3
Class	5M1 (IEC 60721-3-5)
Shock resistance	IEC 60068-2-27, IEC 60721-3-5, IEC TR 60721-4-5, IEC 61496-3
Class	5M1 (IEC 60721-3-5)
Continuous shock	50 m/s², 11 ms
	100 m/s², 16 ms

Other information

Type of light	Pulsed laser diode
Wave length	905 nm
Detectable remission factor	1.8 % ... > 1,000 %, reflectors
Laser class	1 (21 CFR 1040.10 and 1040.11, IEC 60825-1)

Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
EC-Type-Examination approval	✓
China GB certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

Classifications

ECLASS 5.0	27272705
ECLASS 5.1.4	27272705
ECLASS 6.0	27272705
ECLASS 6.2	27272705
ECLASS 7.0	27272705
ECLASS 8.0	27272705
ECLASS 8.1	27272705
ECLASS 9.0	27272705
ECLASS 10.0	27272705
ECLASS 11.0	27272705
ECLASS 12.0	27272705
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550
UNSPSC 16.0901	39121528

Dimensional drawing Scan plane origin

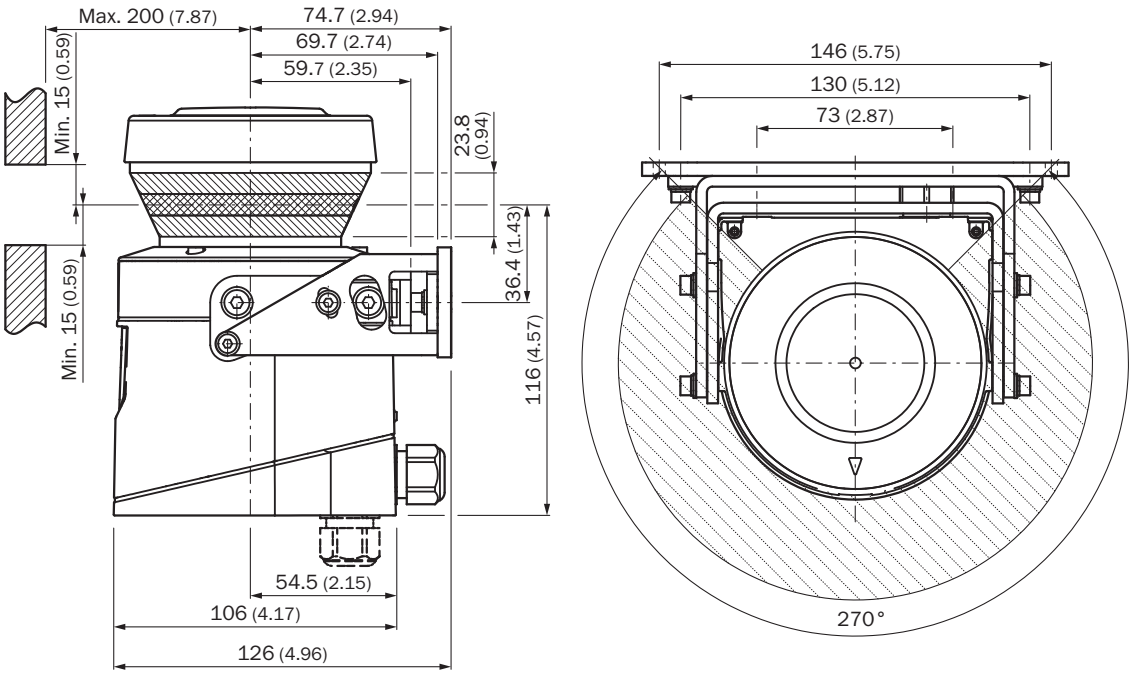

Dimensions in mm (inch)

Dimensional drawing Laser scanner

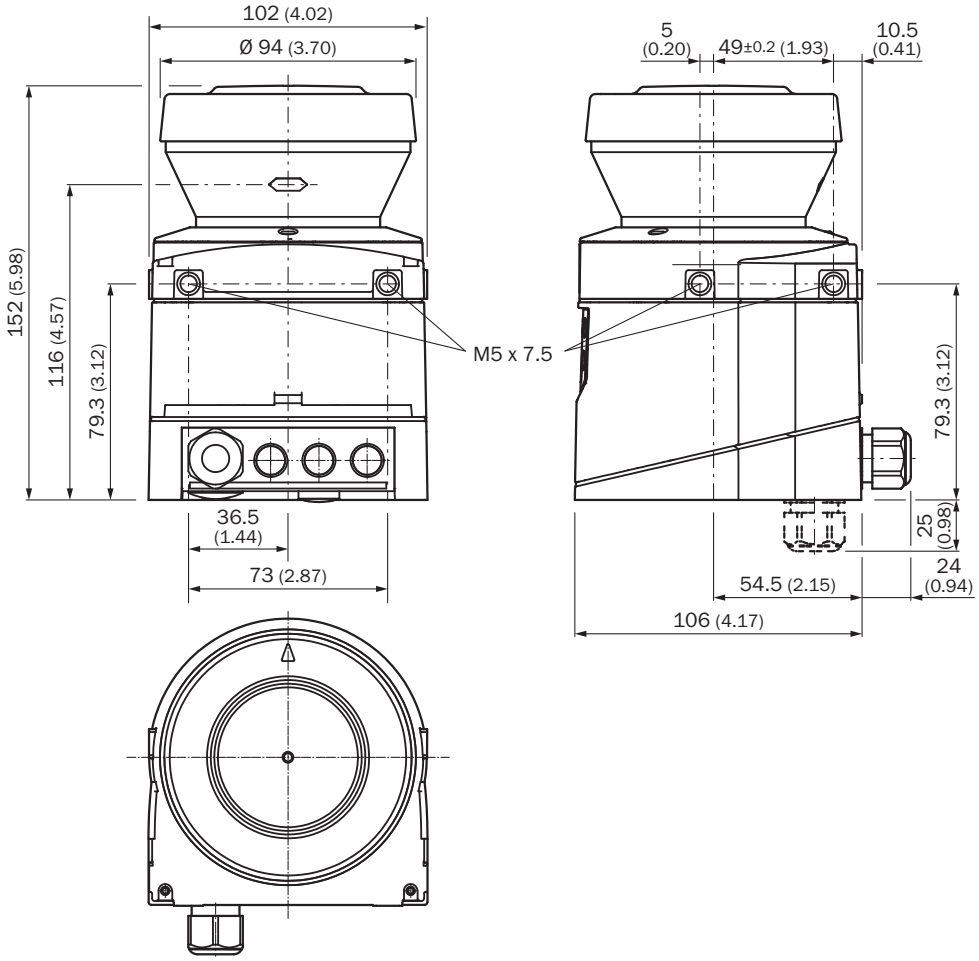

Dimensions in mm (inch)

Connection diagram S300 Expert with S300 Expert in host/guest connection with relays/contactors

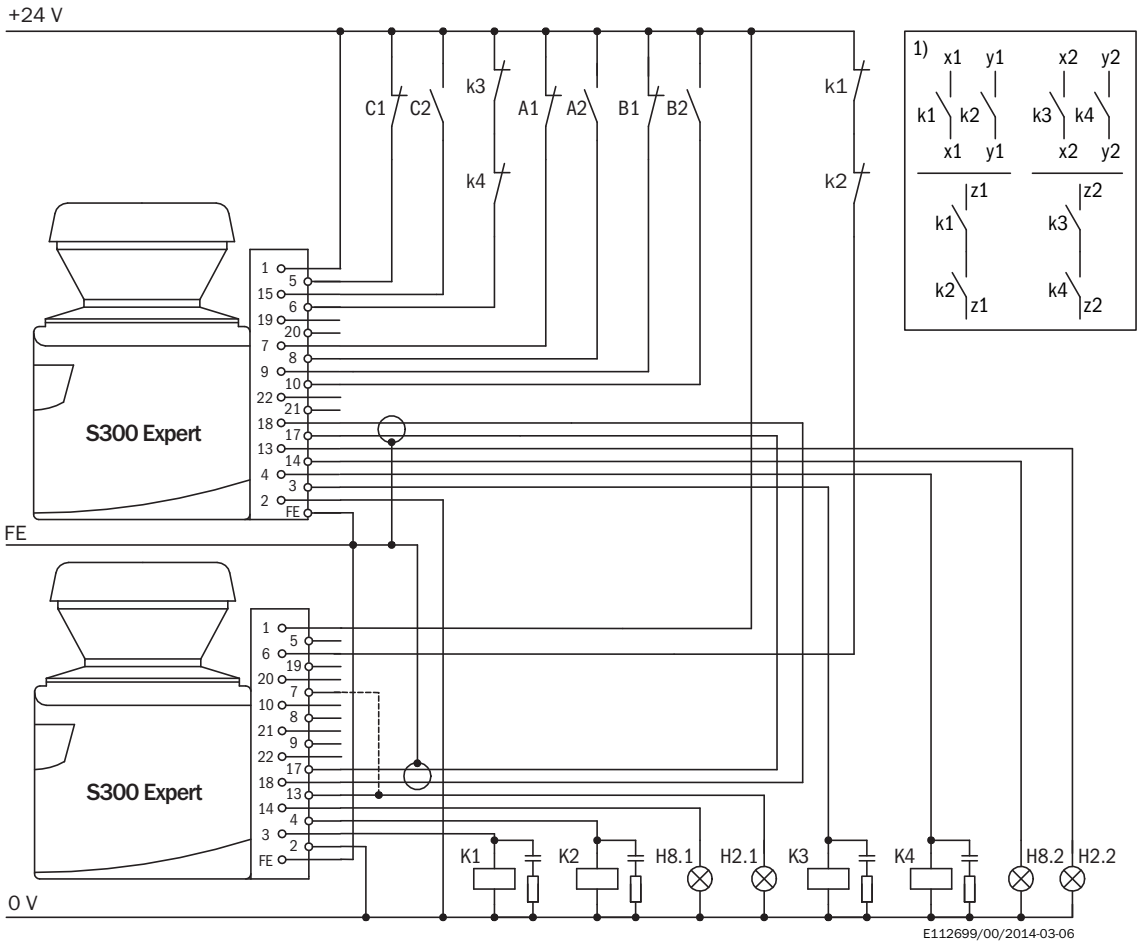

Comments

[1] Output circuits: These contacts are to be connected to the controller such that, with the output circuit open, the dangerous state is disabled. For categories 4 and 3, this integration must be dual-channel (x/y paths). Single-channel insertion in the control (z path) is only possible with a single-channel control and by taking the risk analysis into account.

Recommended accessories

Other models and accessories ➜ www.sick.com/S300

	Brief description	Type	part no.
Mounting systems			
	• **Description:** Mounting bracket for rear mounting on wall or machine • **Packing unit:** 1 piece	Mounting kit 1a	2034324
	• **Description:** Mounting bracket for rear mounting on wall or machine with protection of optics hood • **Packing unit:** 1 piece	Mounting kit 1b	2034325
	• **Description:** Mounting bracket, adjustable lateral axis, only in conjunction with mounting kit 1a (2034324) or 1b (2034325) • **Packing unit:** 1 piece	Mounting kit 2	2039302
	• **Description:** Mounting plate, adjustable longitudinal axis, only in conjunction with mounting kit 2 (2039302) • **Packing unit:** 1 piece	Mounting kit 3	2039303
connectors and cables			
	• **Connection type head A:** Male connector, M8, 4-pin, straight • **Connection type head B:** Male connector, USB-A, straight • **Cable:** 2 m, 4-wire, PVC • **Description:** Unshielded	DSL-8U04G02M025KM1	6034574
	• **Connection type head A:** Male connector, M8, 4-pin, straight • **Connection type head B:** Male connector, USB-A, straight • **Cable:** 10 m, 4-wire, PVC • **Description:** Unshielded	DSL-8U04G10M025KM1	6034575
	• **Connection type head A:** Flying leads • **Connection type head B:** Flying leads • **Items supplied:** By the meter • **Cable:** 15-wire, AWG20, PVC • **Description:** Unshielded • **Note:** On 100 m reel	Connecting cable	6030795
	• **Connection type head A:** Flying leads • **Connection type head B:** Flying leads • **Items supplied:** By the meter • **Cable:** 2-wire, twisted pair, 120 Ohm, PVC • **Description:** Shielded • **Note:** Fitting for EFI connections	EFI connecting cable	6029448

	Brief description	Type	part no.
system plugs and extension modules			
	• **Description:** Without cable, For S300 Standard, Advanced, Expert and ProfessionalNot for use of incremental encoders, integrated configuration storage	SX0B-A0000G	2032807
	• **Cable:** 5 m, 15-wire, PVC • **Description:** Pre-assembled, unshielded, For S300 Advanced, Expert and ProfessionalNot for use of incremental encoders, integrated configuration storage • **Connection systems:** Flying leads	SX0B-B1505G	2034264
	• **Cable:** 10 m, 15-wire, PVC • **Description:** Pre-assembled, unshielded, For S300 Advanced, Expert and ProfessionalNot for use of incremental encoders, integrated configuration storage • **Connection systems:** Flying leads	SX0B-B1510G	2034265
	• **Description:** Without cable, For S300 Expert and ProfessionalFor use of incremental encoders, integrated configuration storage	SX0B-A0000J	2032856
	• **Cable:** 5 m, 11-wire, PVC • **Description:** Pre-assembled, unshielded, For S300 Advanced, Expert and ProfessionalFor use of incremental encoders, integrated configuration storage • **Connection systems:** Flying leads	SX0B-B1105J	2032857
	• **Cable:** 10 m, 11-wire, PVC • **Description:** Pre-assembled, unshielded, For S300 Advanced, Expert and ProfessionalFor use of incremental encoders, integrated configuration storage • **Connection systems:** Flying leads	SX0B-B1110J	2032858

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com

SICK
Sensor Intelligence.