




WTB4FT-1G311120ZZZ  
W4

PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

| Type               | part no. |
|--------------------|----------|
| WTB4FT-1G311120ZZZ | 1113178  |

Other models and accessories → [www.sick.com/W4](http://www.sick.com/W4)

Detailed technical data

Features

|                                                                                                 |                                                                                       |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Functional principle</b>                                                                     | Photoelectric proximity sensor                                                        |
| <b>Functional principle detail</b>                                                              | Background suppression, DoubleLine                                                    |
| <b>Sensing range</b>                                                                            |                                                                                       |
| Sensing range min.                                                                              | 7 mm                                                                                  |
| Sensing range max.                                                                              | 120 mm                                                                                |
| Adjustable switching threshold for background suppression                                       | 15 mm ... 120 mm                                                                      |
| Reference object                                                                                | Object with 90% remission factor (complies with standard white according to DIN 5033) |
| Minimum distance between set sensing range and background (black 6% / white 90%)                | 1 mm, at a distance of 50 mm                                                          |
| Recommended sensing range for the best performance                                              | 30 mm ... 80 mm                                                                       |
| <b>Emitted beam</b>                                                                             |                                                                                       |
| Light source                                                                                    | PinPoint LED                                                                          |
| Type of light                                                                                   | Visible red light                                                                     |
| Shape of light spot                                                                             | Line-shaped, two parallel line-shaped light spots                                     |
| Light spot size (distance)                                                                      | 1.2 mm x 17 mm (50 mm)                                                                |
| Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) | < +/- 1.5° (at Ta = +23 °C)                                                           |
| <b>Key LED figures</b>                                                                          |                                                                                       |
| Normative reference                                                                             | EN 62471:2008-09   IEC 62471:2006, modified                                           |

|                                              |                                                                                                                          |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| LED risk group marking                       | Free group                                                                                                               |
| Wave length                                  | 635 nm                                                                                                                   |
| Average service life                         | 100,000 h at $T_a = +25\text{ }^{\circ}\text{C}$                                                                         |
| <b>Smallest detectable object (MDO) typ.</b> | 1 mm (At 50 mm distance (object with 90% remission (complies with standard white according to DIN 5033)))                |
| <b>Adjustment</b>                            |                                                                                                                          |
| Teach-Turn adjustment                        | BluePilot: For setting the sensing range                                                                                 |
| <b>Display</b>                               |                                                                                                                          |
| LED blue                                     | BluePilot: sensing range indicator                                                                                       |
| LED green                                    | Operating indicator<br>Static on: power on                                                                               |
| LED yellow                                   | Status of received light beam<br>Static on: object present<br>Static off: object not present                             |
| <b>Special applications</b>                  | Detecting flat objects, Detecting objects wrapped in film, Detecting perforated objects, Detecting uneven, shiny objects |

## Safety-related parameters

|                                     |           |
|-------------------------------------|-----------|
| <b>MTTF<sub>D</sub></b>             | 661 years |
| <b>DC<sub>avg</sub></b>             | 0 %       |
| <b>T<sub>M</sub> (mission time)</b> | 20 years  |

## Electronics

|                                     |                                                                                |
|-------------------------------------|--------------------------------------------------------------------------------|
| <b>Supply voltage U<sub>B</sub></b> | 10 V DC ... 30 V DC <sup>1)</sup>                                              |
| <b>Ripple</b>                       | $\leq 5\text{ V}_{pp}$                                                         |
| <b>Usage category</b>               | DC-12 (According to EN 60947-5-2)<br>DC-13 (According to EN 60947-5-2)         |
| <b>Current consumption</b>          | $\leq 25\text{ mA}$ , without load. At $U_B = 24\text{ V}$                     |
| <b>Protection class</b>             | III                                                                            |
| <b>Digital output</b>               |                                                                                |
| Number                              | 1                                                                              |
| Type                                | Push-pull: PNP/NPN                                                             |
| Switching mode                      | Light switching                                                                |
| Signal voltage PNP HIGH/LOW         | Approx. $U_B - 2.5\text{ V}$ / 0 V                                             |
| Signal voltage NPN HIGH/LOW         | Approx. $U_B$ / $< 2.5\text{ V}$                                               |
| Output current I <sub>max</sub>     | $\leq 100\text{ mA}$                                                           |
| Circuit protection outputs          | Reverse polarity protected<br>Overcurrent protected<br>Short-circuit protected |
| Response time                       | $\leq 1,000\text{ }\mu\text{s}$ <sup>2)</sup>                                  |
| Repeatability (response time)       | 240 $\mu\text{s}$                                                              |

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> With light/dark ratio 1:1.

<sup>4)</sup> This switching output must not be connected to another output.

|                              |                                                                               |
|------------------------------|-------------------------------------------------------------------------------|
| Switching frequency          | 500 Hz <sup>3)</sup>                                                          |
| <b>Pin/Wire assignment</b>   |                                                                               |
| Function of pin 4/black (BK) | Digital output, light switching, object present → output Q HIGH <sup>4)</sup> |

<sup>1)</sup> Limit values.

<sup>2)</sup> Signal transit time with resistive load in switching mode.

<sup>3)</sup> With light/dark ratio 1:1.

<sup>4)</sup> This switching output must not be connected to another output.

## Mechanics

|                                                       |                           |
|-------------------------------------------------------|---------------------------|
| <b>Housing</b>                                        | Rectangular               |
| <b>Design detail</b>                                  | Flat                      |
| <b>Dimensions (W x H x D)</b>                         | 16 mm x 40.1 mm x 12.1 mm |
| <b>Connection</b>                                     | Cable, 3-wire, 2 m        |
| <b>Connection detail</b>                              |                           |
| Deep-freeze property                                  | Do not bend below 0 °C    |
| Conductor size                                        | 0.14 mm <sup>2</sup>      |
| Cable diameter                                        | Ø 3.4 mm                  |
| Length of cable (L)                                   | 2 m                       |
| <b>Material</b>                                       |                           |
| Housing                                               | Plastic, VISTAL®          |
| Front screen                                          | Plastic, PMMA             |
| Cable                                                 | Plastic, PVC              |
| <b>Weight</b>                                         | Approx. 30 g              |
| <b>Maximum tightening torque of the fixing screws</b> | 0.4 Nm                    |

## Ambient data

|                                            |                                                                                                   |
|--------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Enclosure rating</b>                    | IP66 (EN 60529)<br>IP67 (EN 60529)                                                                |
| <b>Ambient operating temperature</b>       | -40 °C ... +60 °C                                                                                 |
| <b>Ambient temperature, storage</b>        | -40 °C ... +75 °C                                                                                 |
| <b>Typ. Ambient light immunity</b>         | Artificial light: ≤ 50,000 lx<br>Sunlight: ≤ 50,000 lx                                            |
| <b>Shock resistance</b>                    | 30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27)) |
| <b>Vibration resistance</b>                | 10 Hz ... 1,000 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))                                     |
| <b>Air humidity</b>                        | 35 % ... 95 %, relative humidity (no condensation)                                                |
| <b>Electromagnetic compatibility (EMC)</b> | EN 60947-5-2                                                                                      |
| <b>Resistance to cleaning agent</b>        | ECOLAB                                                                                            |
| <b>UL File No.</b>                         | NRKH.E181493 & NRKH7.E181493                                                                      |

## Certificates


|                                           |   |
|-------------------------------------------|---|
| <b>EU declaration of conformity</b>       | ✓ |
| <b>UK declaration of conformity</b>       | ✓ |
| <b>ACMA declaration of conformity</b>     | ✓ |
| <b>Moroccan declaration of conformity</b> | ✓ |

|                              |   |
|------------------------------|---|
| <b>China-RoHS</b>            | ✓ |
| <b>ECOLAB certificate</b>    | ✓ |
| <b>cULus certificate</b>     | ✓ |
| <b>EAC certificate / DoC</b> | ✓ |

## Classifications


|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270904 |
| <b>ECLASS 5.1.4</b>   | 27270904 |
| <b>ECLASS 6.0</b>     | 27270904 |
| <b>ECLASS 6.2</b>     | 27270904 |
| <b>ECLASS 7.0</b>     | 27270904 |
| <b>ECLASS 8.0</b>     | 27270904 |
| <b>ECLASS 8.1</b>     | 27270904 |
| <b>ECLASS 9.0</b>     | 27270904 |
| <b>ECLASS 10.0</b>    | 27270904 |
| <b>ECLASS 11.0</b>    | 27270904 |
| <b>ECLASS 12.0</b>    | 27270903 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

## display and adjustment elements




- ① LED blue
- ② Teach-Turn adjustment
- ③ LED yellow
- ④ LED green

## Connection type Cable, 3-wire



Connection diagram Cd-043



Truth table Push-pull: PNP/NPN – dark switching  $\bar{Q}$


|                         | Dark switching $\bar{Q}$ (normally closed (upper switch), normally open (lower switch)) |                             |
|-------------------------|-----------------------------------------------------------------------------------------|-----------------------------|
|                         | Object not present → Output HIGH                                                        | Object present → Output LOW |
| Light receive           | ✗                                                                                       | ✓                           |
| Light receive indicator | ✗                                                                                       | ☀                           |
| Load resistance to L+   | ✗                                                                                       | ⚡                           |
| Load resistance to M    | ⚡                                                                                       | ✗                           |
|                         |                                                                                         |                             |

## Truth table Push-pull: PNP/NPN - light switching Q


|                         | Light switching Q (normally open (upper switch), normally closed (lower switch)) |                              |
|-------------------------|----------------------------------------------------------------------------------|------------------------------|
|                         | Object not present → Output LOW                                                  | Object present → Output HIGH |
| Light receive           | ✗                                                                                | ✓                            |
| Light receive indicator | ✗                                                                                | ☀                            |
| Load resistance to L+   | ⚡                                                                                | ✗                            |
| Load resistance to M    | ✗                                                                                | ⚡                            |
|                         |                                                                                  |                              |

## Characteristic curve

Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

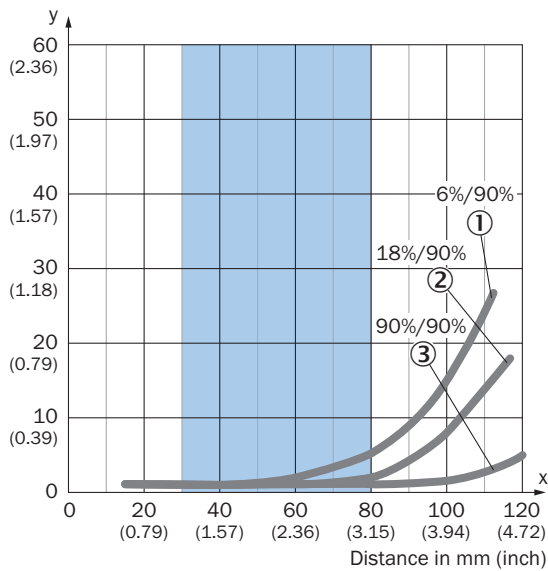


Example:  
Safe suppression of the background

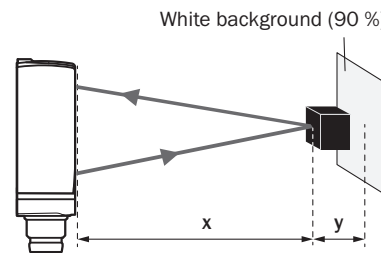


Black object (6 % remission)  
Set sensing range  $x = 80$  mm  
Needed minimum distance to white background  $y = 5$  mm

Light spot size Vertical

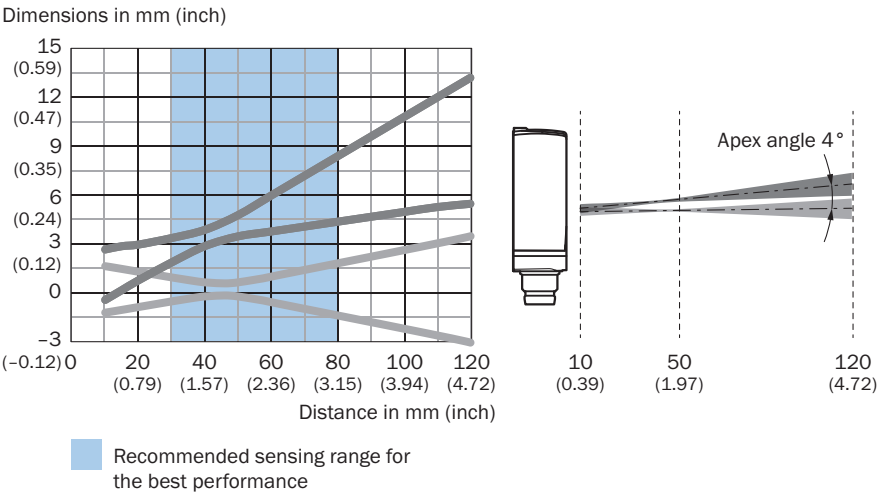


Light spot size Horizontal

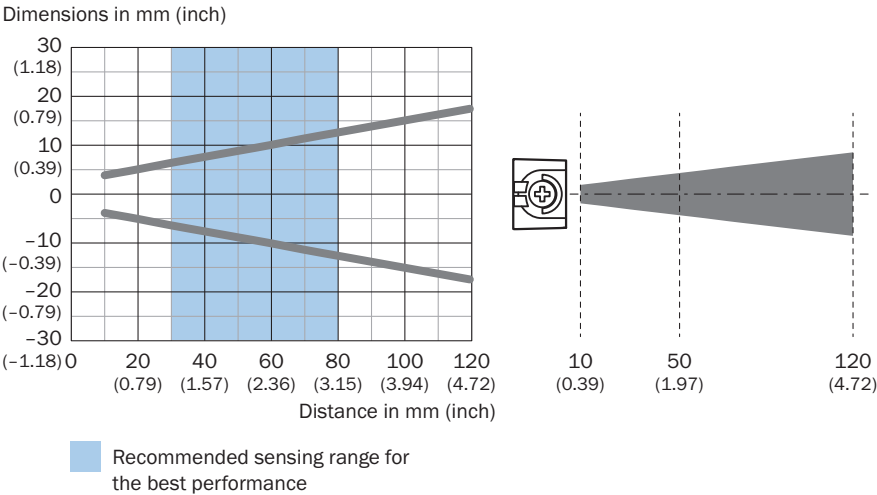



## Sensing range diagram

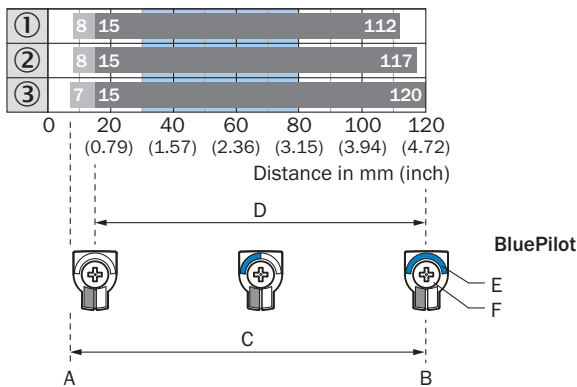


A = Sensing range min. in mm  
B = Sensing range max. in mm  
C = Viewing range  
D = Adjustable switching threshold for background suppression  
E = Sensing range indicator  
F = Teach-Turn adjustment

Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

## Dimensional drawing

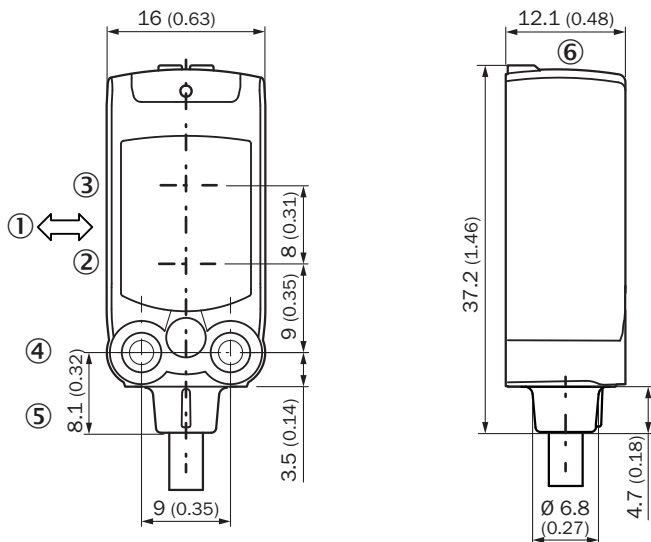

Dimensions in mm (inch)

- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ M3 mounting hole
- ⑤ Connection
- ⑥ display and adjustment elements

## Recommended accessories

Other models and accessories → [www.sick.com/W4](http://www.sick.com/W4)

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Type        | part no. |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| Mounting systems                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |          |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Mounting bracket for wall mounting</li> <li><b>Material:</b> Stainless steel</li> <li><b>Details:</b> Stainless steel 1.4571</li> <li><b>Items supplied:</b> Mounting hardware included</li> <li><b>Suitable for:</b> W4S, W4F, W4S</li> </ul>                                                                                                                                                                                                                                      | BEF-W4-A    | 2051628  |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Mounting bracket for floor mounting</li> <li><b>Material:</b> Stainless steel</li> <li><b>Details:</b> Stainless steel 1.4571</li> <li><b>Items supplied:</b> Mounting hardware included</li> <li><b>Suitable for:</b> W4S, W4F, W4S</li> </ul>                                                                                                                                                                                                                                     | BEF-W4-B    | 2051630  |
|    | <ul style="list-style-type: none"> <li><b>Description:</b> Plate N08 for universal clamp bracket</li> <li><b>Material:</b> Steel, zinc diecast</li> <li><b>Details:</b> Zinc plated steel (sheet), Zinc die cast (clamping bracket)</li> <li><b>Items supplied:</b> Universal clamp (5322626), mounting hardware</li> <li><b>Usable for:</b> W100, W150, W4S, W4F, W8, W9-3, W8G, W8 Laser, W8 Inox, G6, W100 Laser, W100-2, W10, G6 Inox, RAY10, W4SLG-3, W9, GR18, MultiPulse, Reflex Array, MultiLine, LUT3, KT5, KT8, KT10, CS8</li> </ul> | BEF-KHS-N08 | 2051607  |
| connectors and cables                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M8, 3-pin, straight, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> 0.14 mm² ... 0.5 mm²</li> </ul>                                                                                                                                                                                                                                                   | STE-0803-G  | 6037322  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)