



Product designation

Product type designation

Number of poles

Operating voltage type

Switch
disconnecter
GA
Nr. 3
AC

Contact characteristics

IEC Conventional free air thermal current I _{th}	A	25
---	---	----

Rated insulation voltage U _i IEC/EN	V	1000
--	---	------

Rated impulse withstand voltage U _{imp}	kV	8
--	----	---

Operating current I_e

AC21A

400V	A	25
500V	A	25
690V	A	25

AC22A

400V	A	25
500V	A	25
690V	A	25

AC23A

400V	A	25
500V	A	25
690V	A	25

Power dissipation per pole max	W	0.4
--------------------------------	---	-----

Rated operational power AC23A

400V	kW	11
690V	kW	22

Conditional short-circuit current (rms)	kA	10
---	----	----

Short-circuit protection with fuse	Class/A	gG25
------------------------------------	---------	------

Making capacity AC23A 400V	A	400
----------------------------	---	-----

Breaking capacity AC23A 400V	A	320
------------------------------	---	-----

Mechanical life	cycles	100000
-----------------	--------	--------

Electrical life AC21A	cycles	100000
-----------------------	--------	--------

Mechanical features

Operating position

normal allowable	Vertical plan Any
---------------------	----------------------

Fixing	Screw / DIN rail 35mm
--------	--------------------------

Terminals

type	Pillar
width	mm 5.6
height	mm 6.5
screw	M4
tool	Phillips 2

Tightening torque for terminals

min	Nm	1.8
max	Nm	2
min	Ibin	1.3
max	Ibin	1.5

Conductor section

IEC min	mm ²	0.75
IEC max	mm ²	16
AWG/kcmil min		18
AWG/kcmil max		6

UL technical data

UL Standard		UL60947-4-1
General purpose current rating	A	25
Operating voltage max	V	600
Horsepower/FLA current three phase motor		

240V	HP	7.5/22
480V	HP	15/21
600V	HP	20/22

Short circuit rating	kA rms	5
Short circuit rating with fuse	Class/A	RK5/30

Ambient conditions

Operating temperature

min	°C	-25
max	°C	55

Storage temperature


min	°C	-40
max	°C	70

Max altitude	m	3000
--------------	---	------


Resistance & Protection

Frontal IP degree	IP20
Pollution degree	3

Dimensions

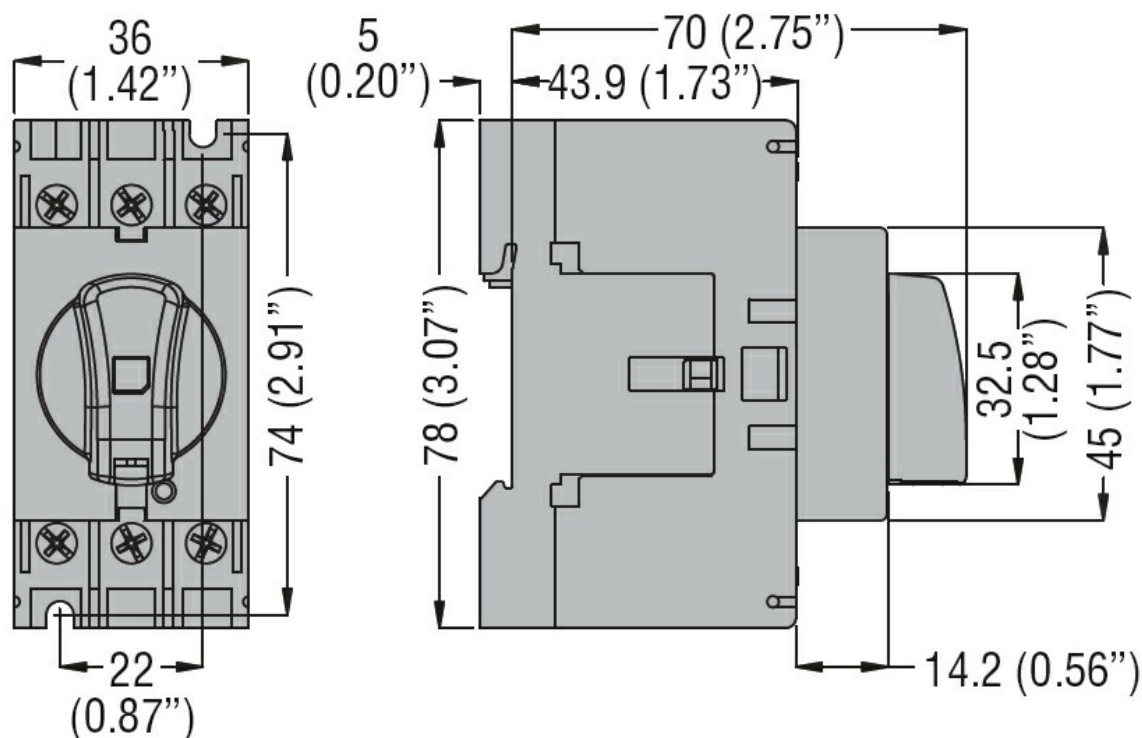

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°60947-4-1

IEC/EN 60947-1

IEC/EN 60947-3

UL60947-4-1

Certifications

CCC

CSA C22.2 n°60947-4-1

cULus according to UL60947-4-1

EAC

KEMA

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnecter