



Number of poles
Operating voltage type

Nr. 3
AC

Contact characteristics

IEC Conventional free air thermal current I_{th}


A 32

UL technical data


UL Standard

UL98

Dimensions

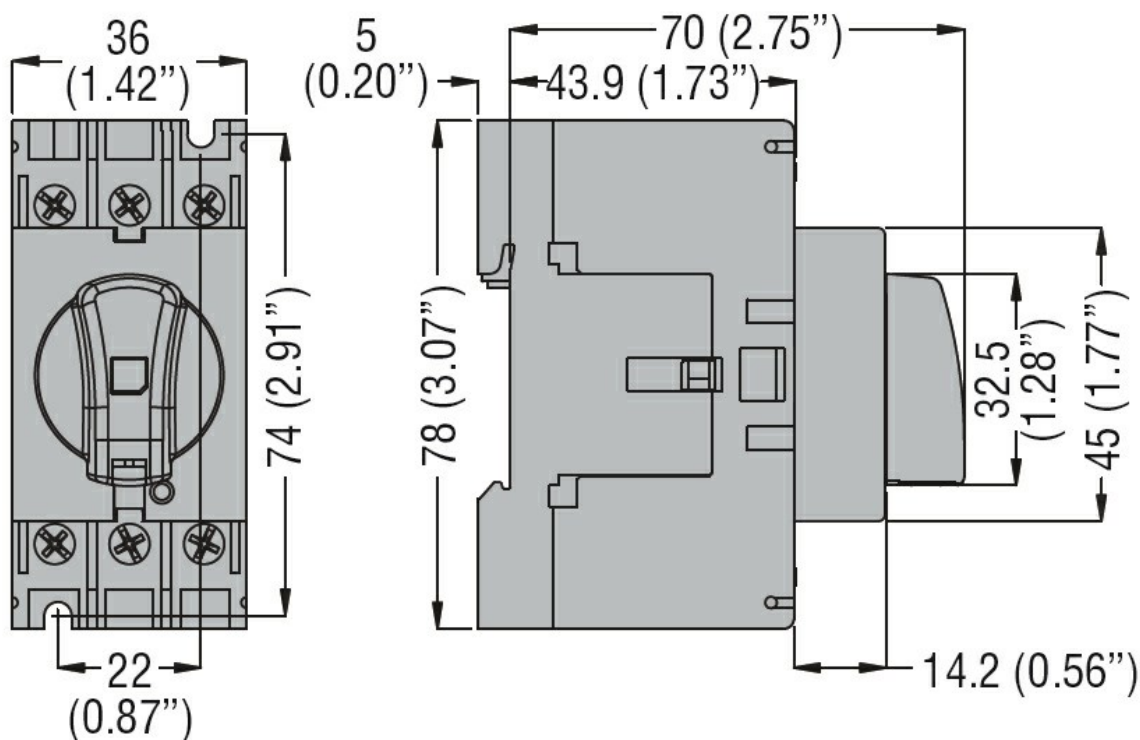

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°60947-4-1

IEC/EN 60947-1

IEC/EN 60947-3

UL60947-4-1

Certifications

CCC

CSA C22.2 n°60947-4-1

cULus according to UL60947-4-1

EAC

KEMA

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnector