



Product designation

Product type designation

Number of poles

Operating voltage type

Switch
disconnecter
GA
Nr. 3
AC

Contact characteristics

IEC Conventional free air thermal current I _{th}	A	63
---	---	----

Rated insulation voltage U _i IEC/EN	V	1000
--	---	------

Rated impulse withstand voltage U _{imp}	kV	8
--	----	---

Operating current I_e

AC21A

400V	A	63
500V	A	63
690V	A	63

AC22A

400V	A	63
500V	A	63
690V	A	63

AC23A

400V	A	63
500V	A	63
690V	A	47

Power dissipation per pole max	W	1.6
--------------------------------	---	-----

Rated operational power AC23A

400V	kW	30
690V	kW	45

Conditional short-circuit current (rms)	kA	50
---	----	----

Short-circuit protection with fuse	Class/A	gG63
------------------------------------	---------	------

Making capacity AC23A 400V	A	1250
----------------------------	---	------

Breaking capacity AC23A 400V	A	1000
------------------------------	---	------

Mechanical life	cycles	30000
-----------------	--------	-------

Electrical life AC21A	cycles	30000
-----------------------	--------	-------

Mechanical features

Operating position

normal allowable	Vertical plan Any
---------------------	----------------------


Fixing	Screw / DIN rail 35mm
--------	--------------------------

Terminals


type	Pillar
width	mm 12.4
height	mm 10.4
screw	M8
tool	Metric Allen key 4

Tightening torque for terminals

	min	Nm	5
	max	Nm	6
	min	I _{bin}	3.75
	max	I _{bin}	4.5
Conductor section			
	IEC min	mm ²	4
	IEC max	mm ²	70
	AWG/kcmil min		12
	AWG/kcmil max		1
UL technical data			
UL Standard			UL98
General purpose current rating		A	60
Operating voltage max		V	600
Horsepower/FLA current three phase motor			
	240V	HP	20/54
	480V	HP	40/52
	600V	HP	40/41
Short circuit rating		kA rms	50
Short circuit rating with fuse		Class/A	J/60
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	55
Storage temperature			
	min	°C	-40
	max	°C	70
Max altitude		m	3000
Resistance & Protection			
Frontal IP degree			IP20
Pollution degree			3
Dimensions			

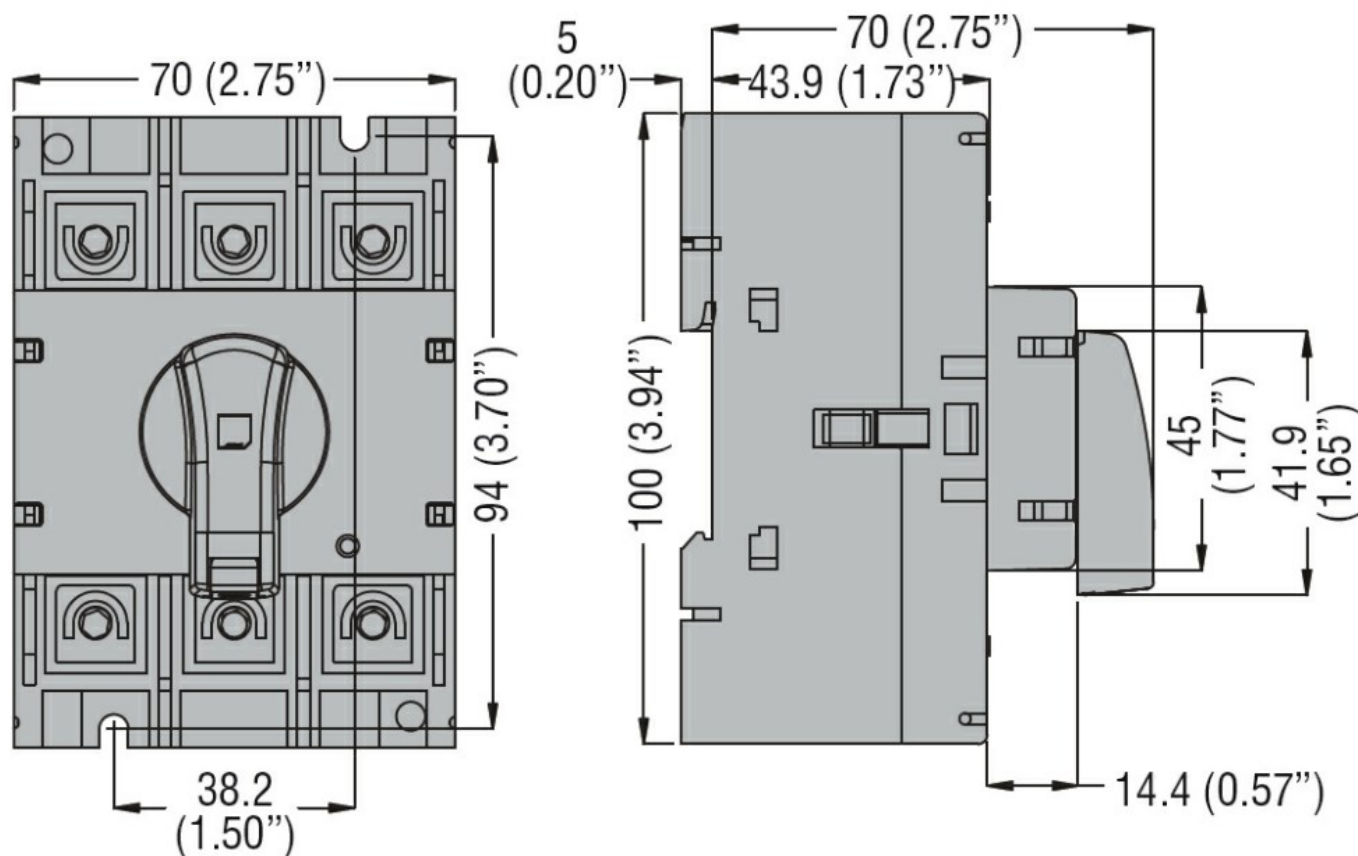

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°4

IEC/EN 60947-1

IEC/EN 60947-3

UL98

Certifications

CCC

CSA C22.2 n°4

cULus according to UL98

EAC

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnecter