



Number of poles
Operating voltage type


Nr. 1
AC

Contact characteristics

IEC Conventional free air thermal current I_{th}

A 63...125

Dimensions

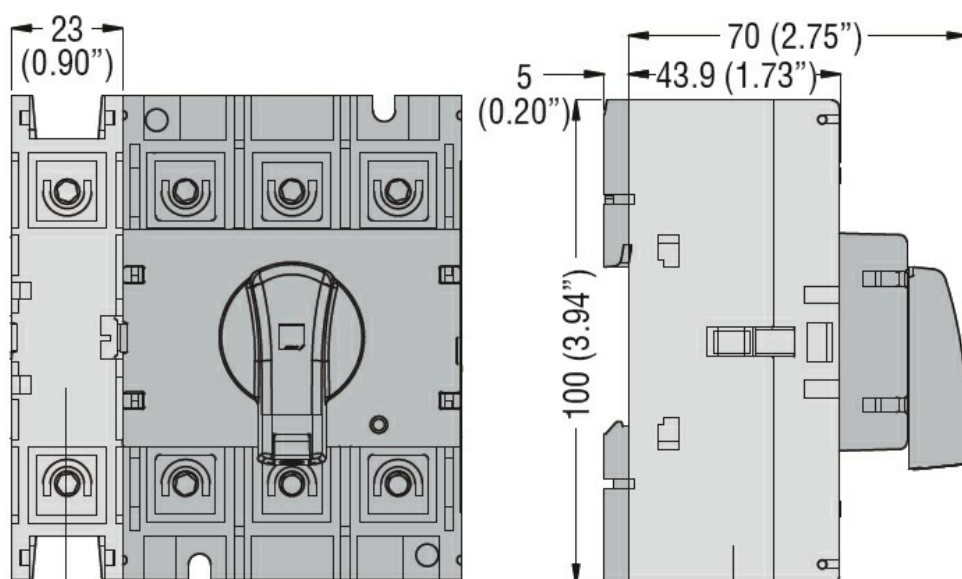

GAX41 125A, GAX42 063A... GAX42 160A,
GAX32 A, GAX34 A

Wiring diagrams

Earth terminal
GAX33... - GAX34...

PE ≡



PE ≡

Certifications and compliance

Compliance

CSA C22.2
IEC/EN 60947-1
IEC/EN 60947-3
IEC/EN 60947-5-1

Certifications	UL508
	UL98
	CCC
	CSA C22.2 n°4
	cULus according to UL98
ETIM classification	EAC
	ETIM 8.0
	EC002498 - Accessories/spare parts for low-voltage switch technology