


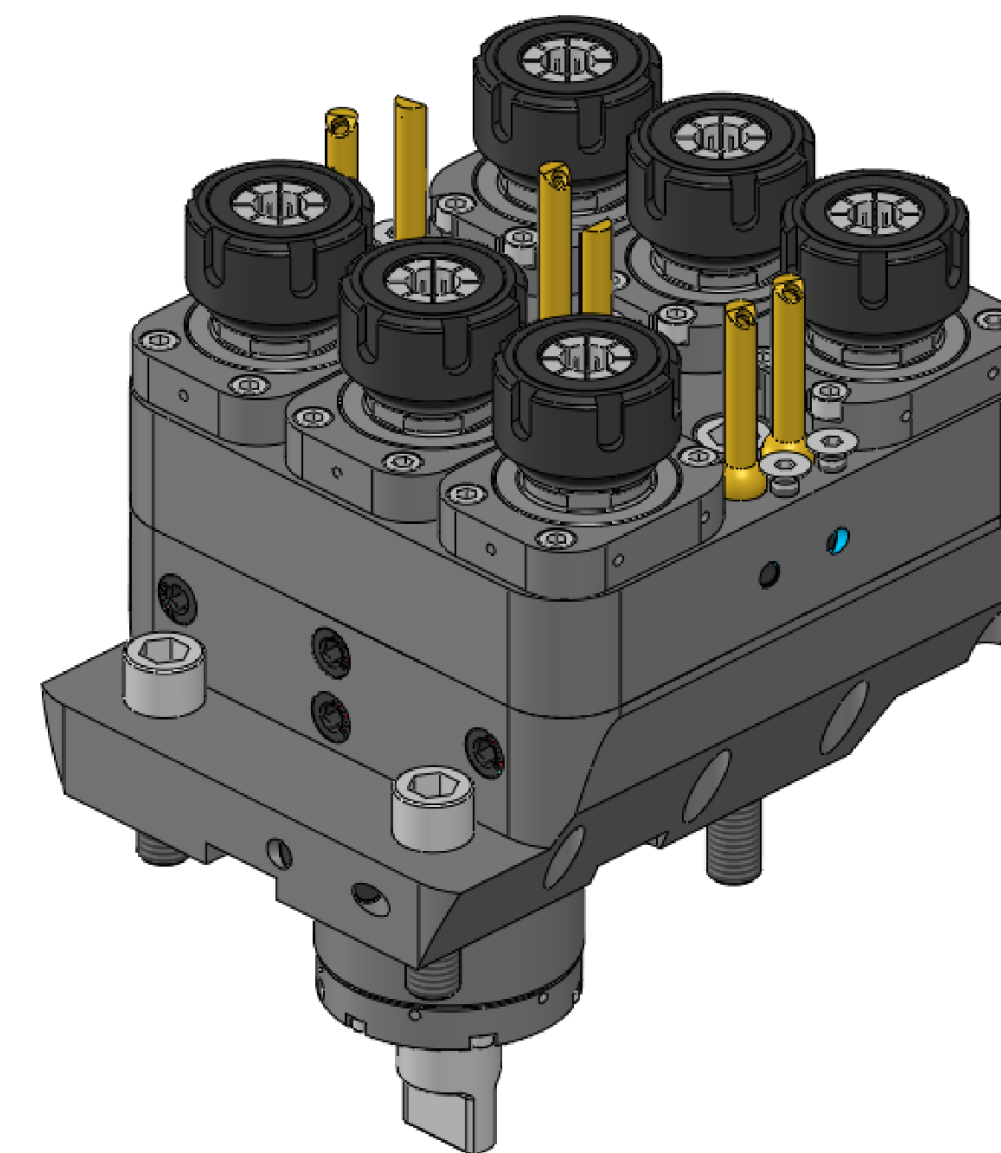
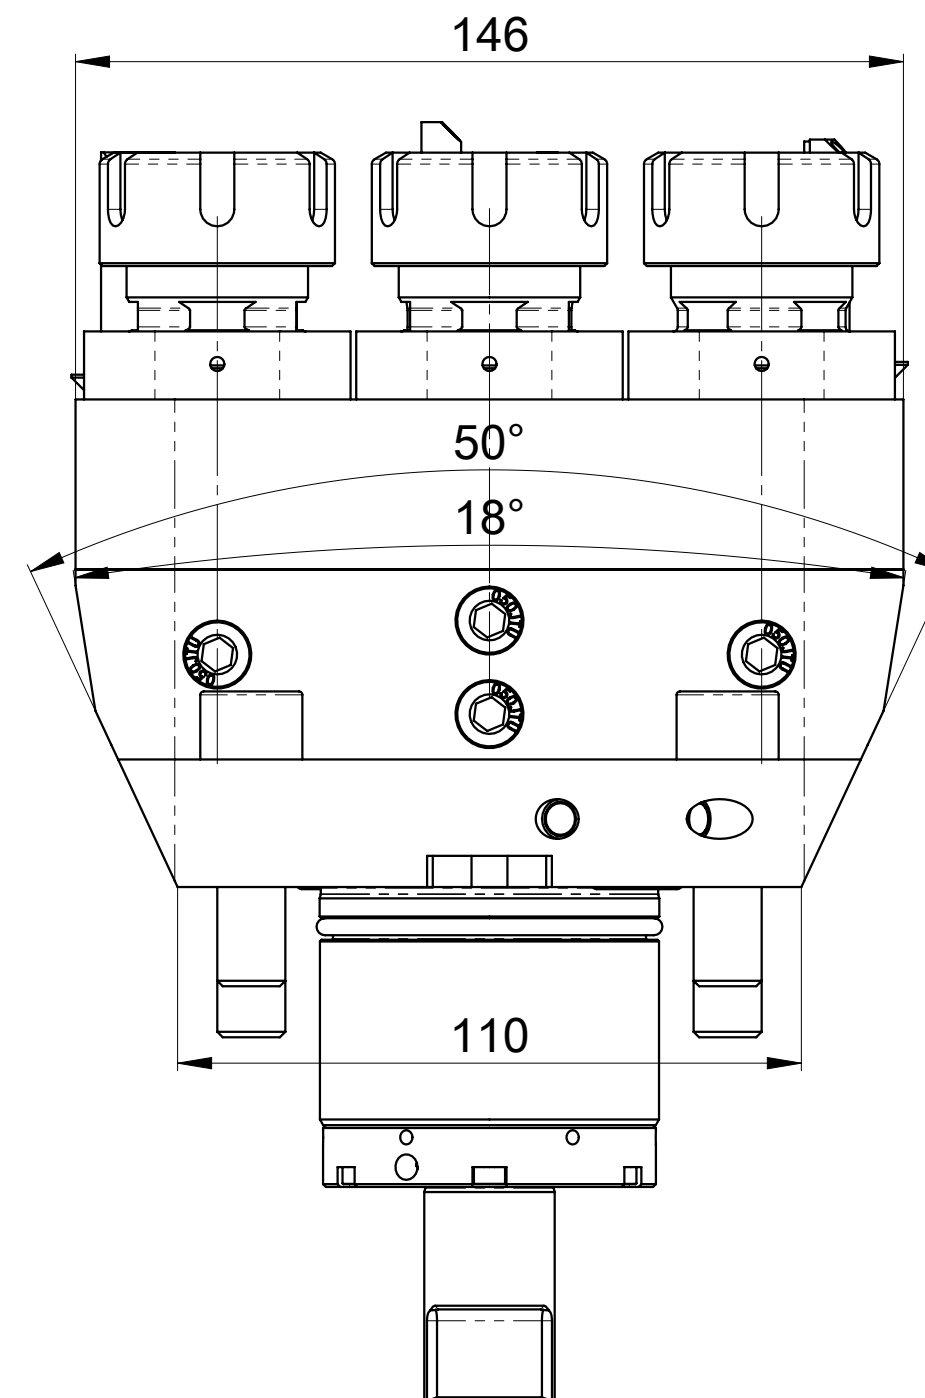


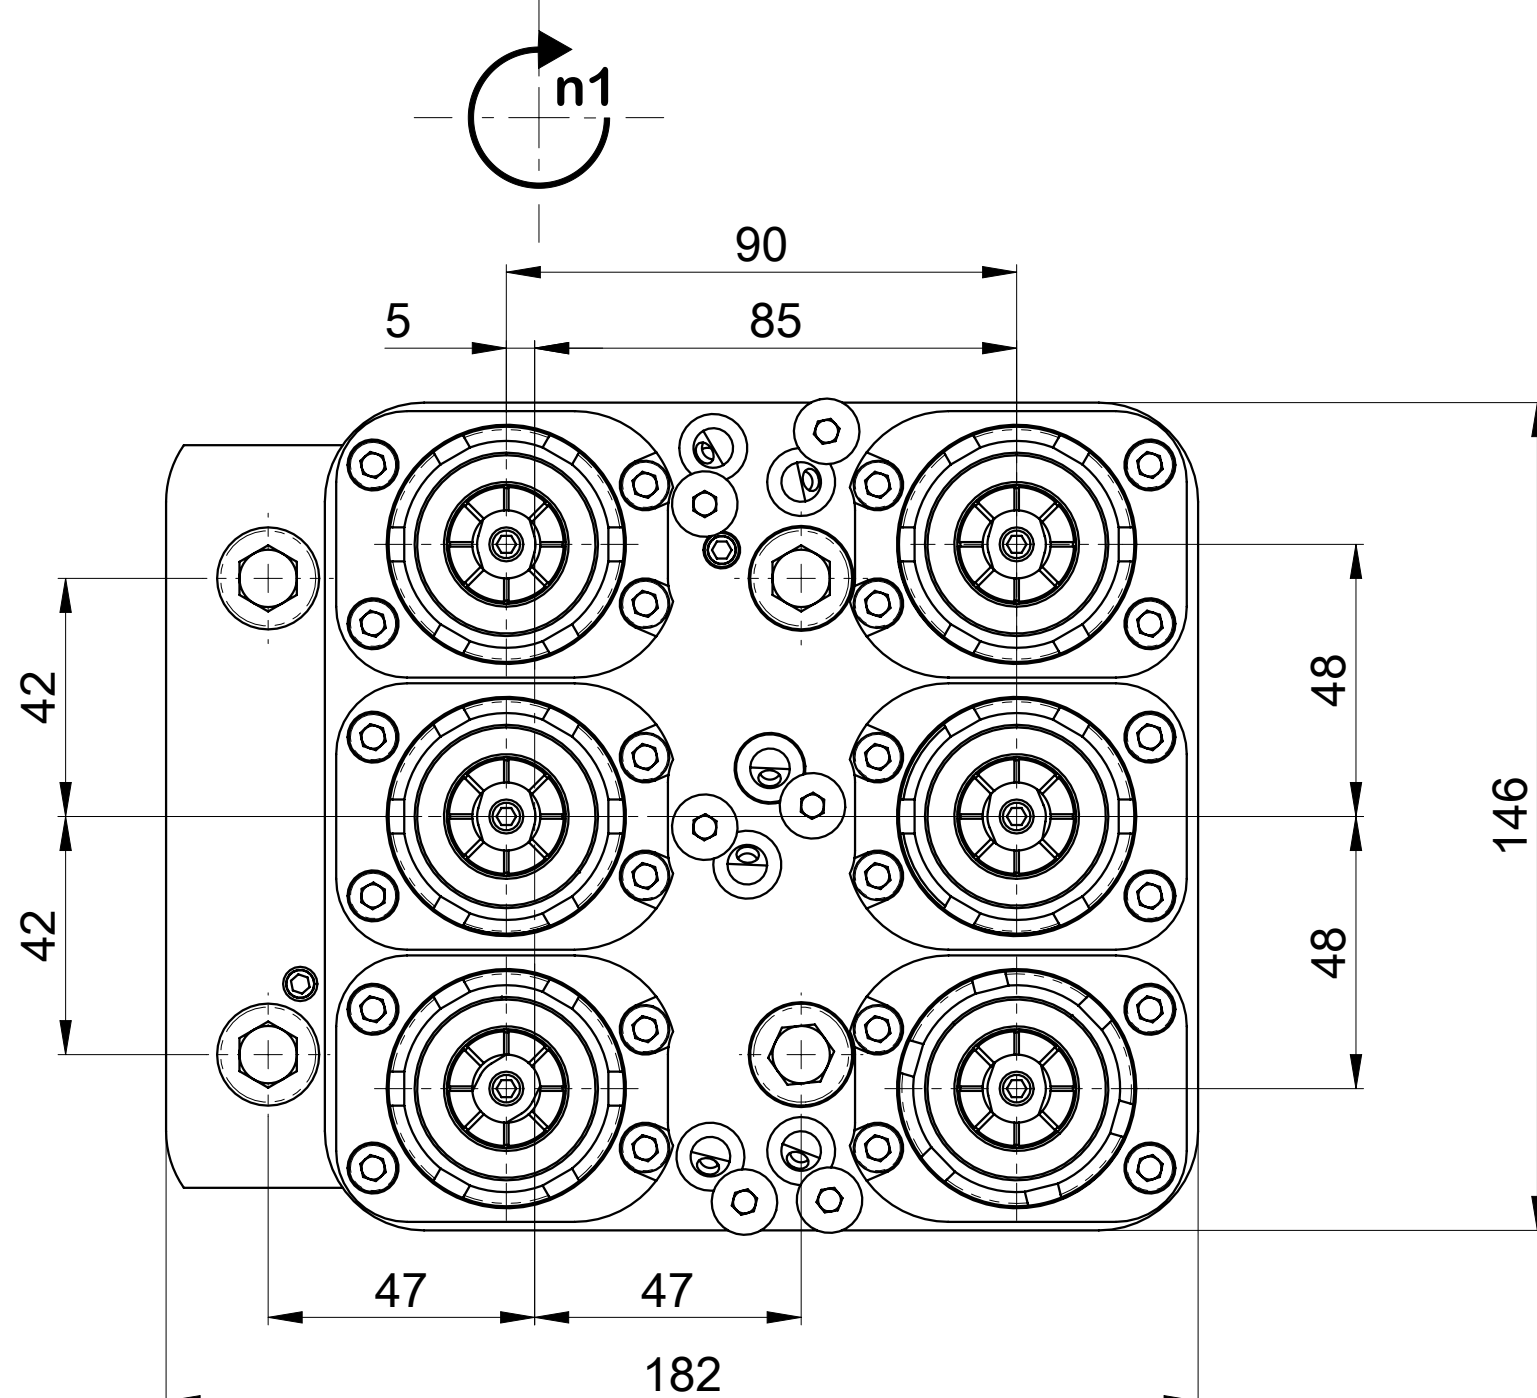

⚠
the maximum torque 20Nm
Must be divided equally
on each spindle
that works simultaneously
1:20/2:10
3:6.5/4:5.
5:4 /6:3.5

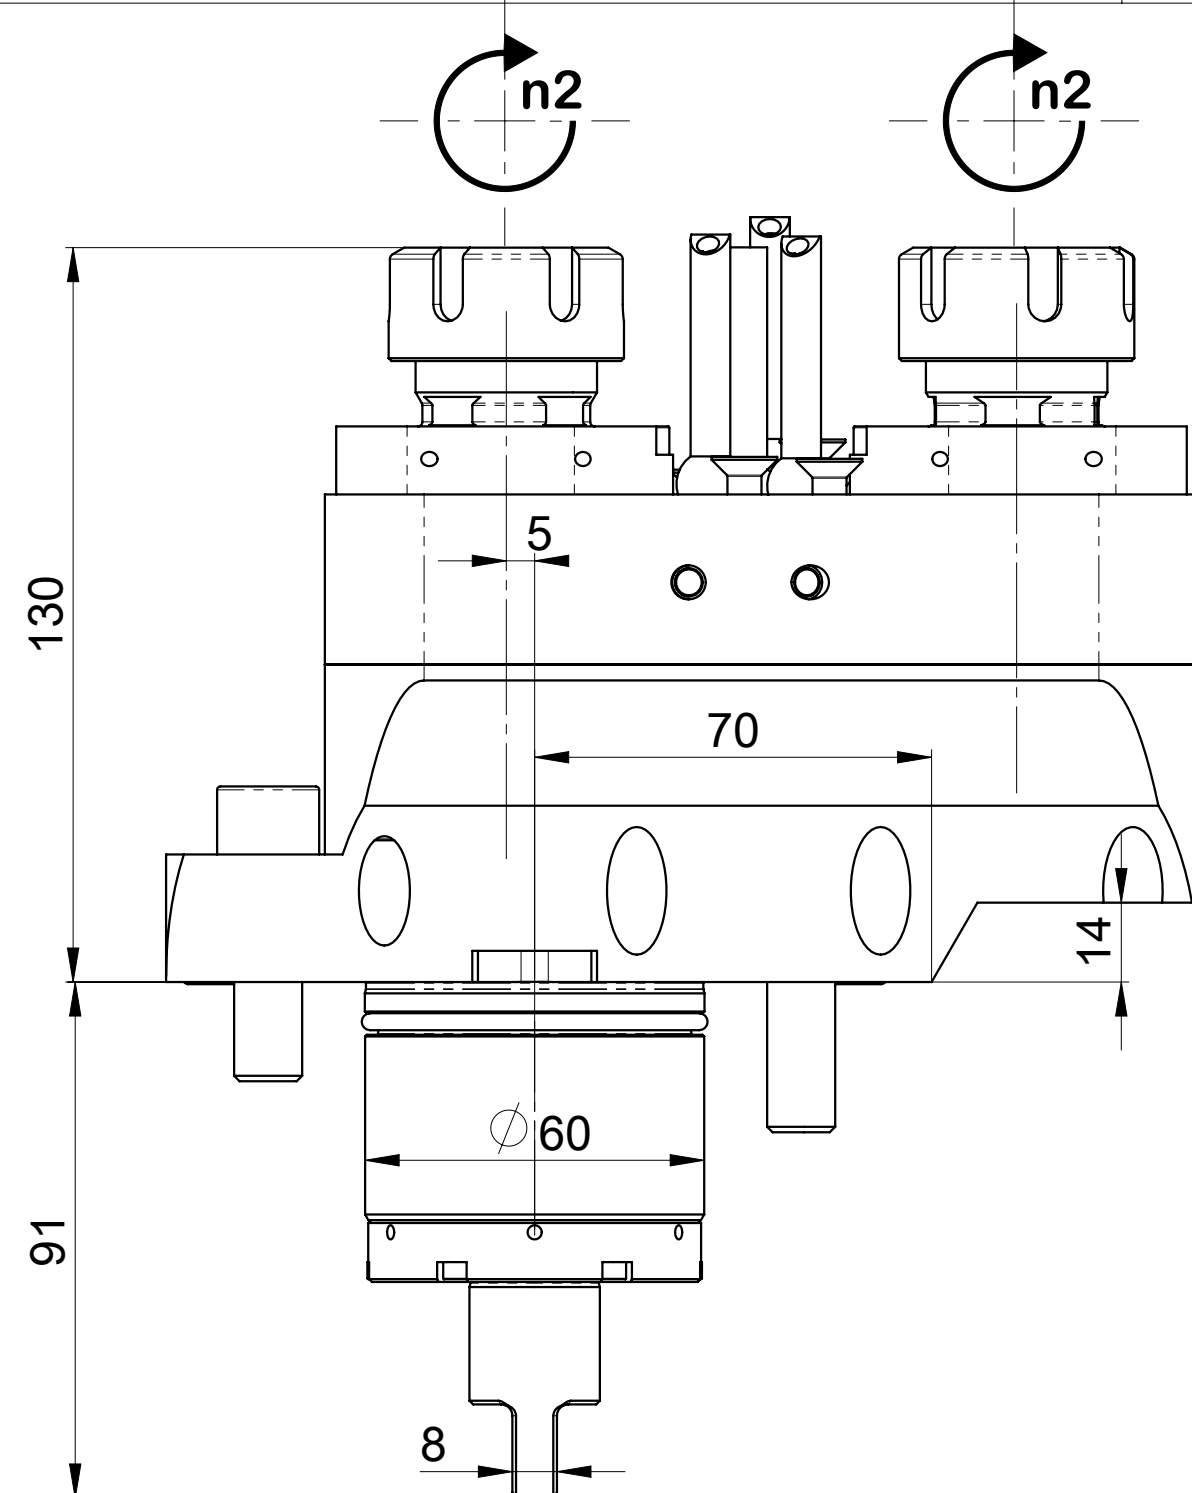

NL138-26

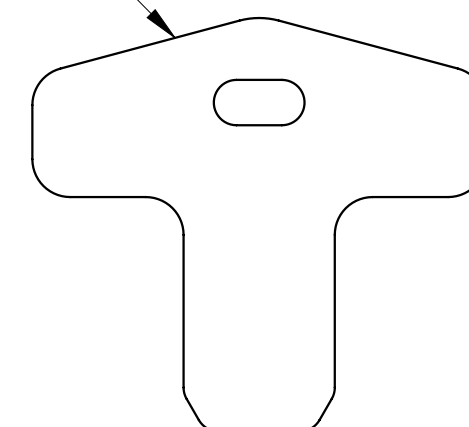

Commercial Code:		RAPP6 25 121UNL	
Denomination: Driven tool-Axial 0° multi		Item Code: ANL138H	
Speed Max (out) 6000 rpm	Coolant EC	Weight 15.790Kg	
Transmission Ratio n1:n2 1:1 ♂ ♂	T2. Max  20 Nm	Info: ALGRA S.p.A. Via Manzoni 41, I-24031 Almenno S.Salvatore (BG) Tel. +39 035642051 Fax +39 035640128 algra.accessori@algra.it	
Pressure Max bar	Filtration µm		
InPut NL	Output ER 25		
QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETA'. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESO SE RICHIESTO THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFÄLTIGT NOCH DITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN			