

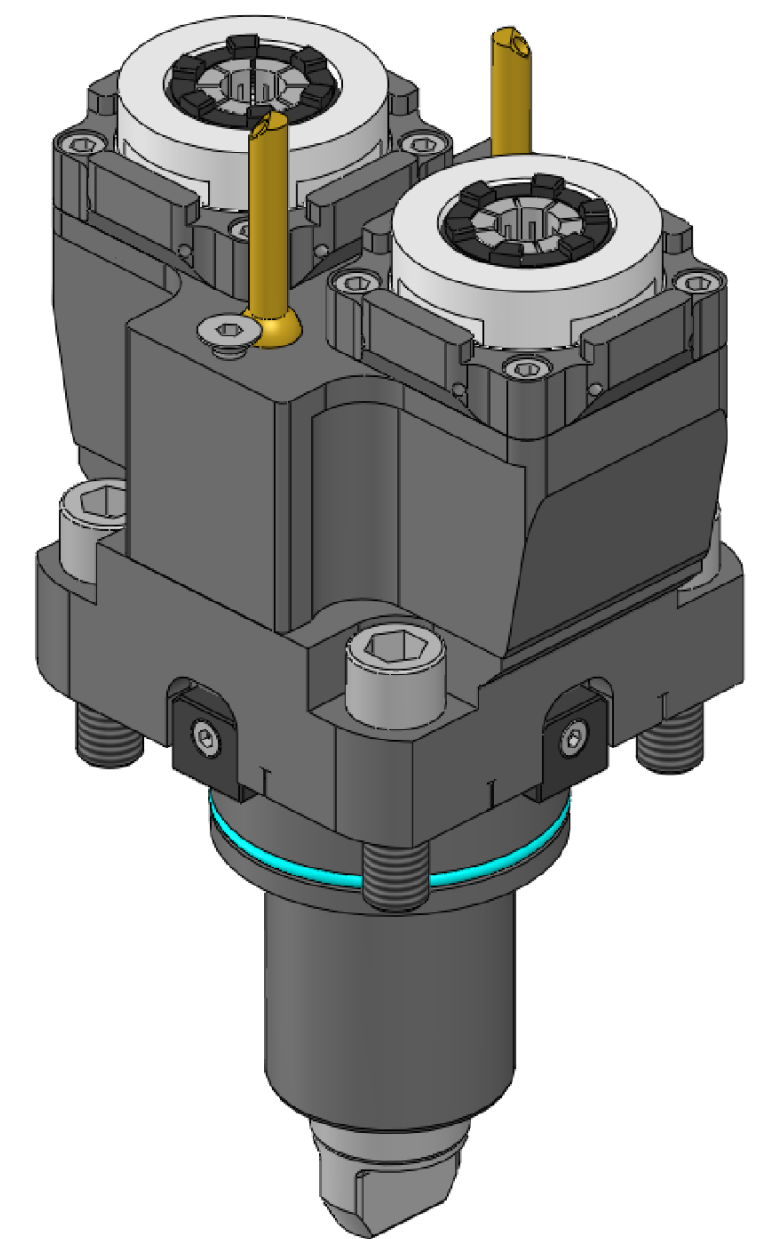
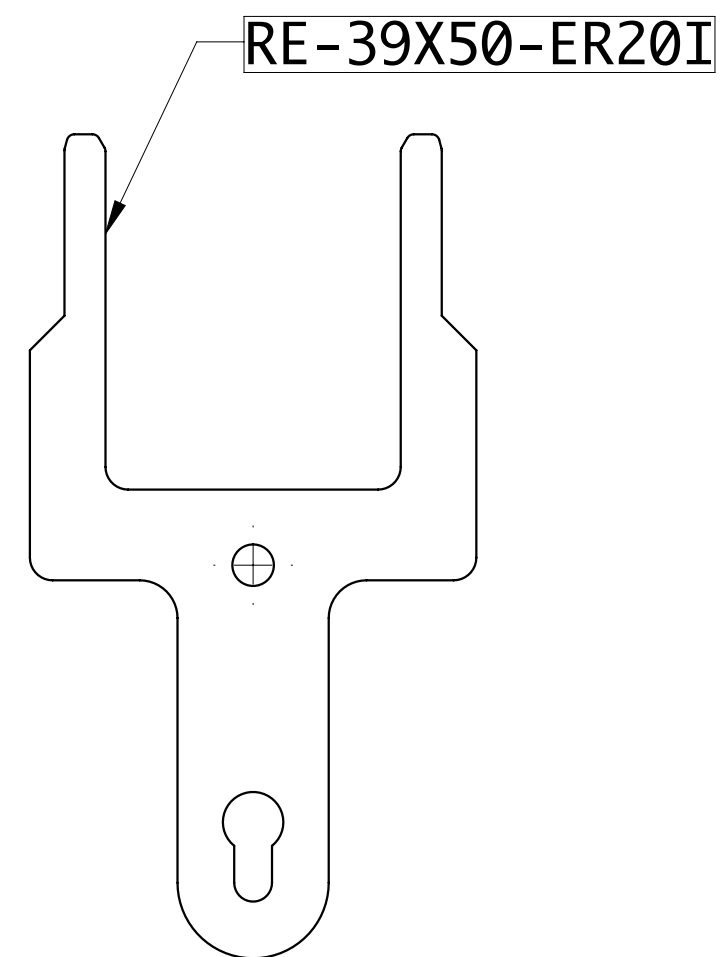


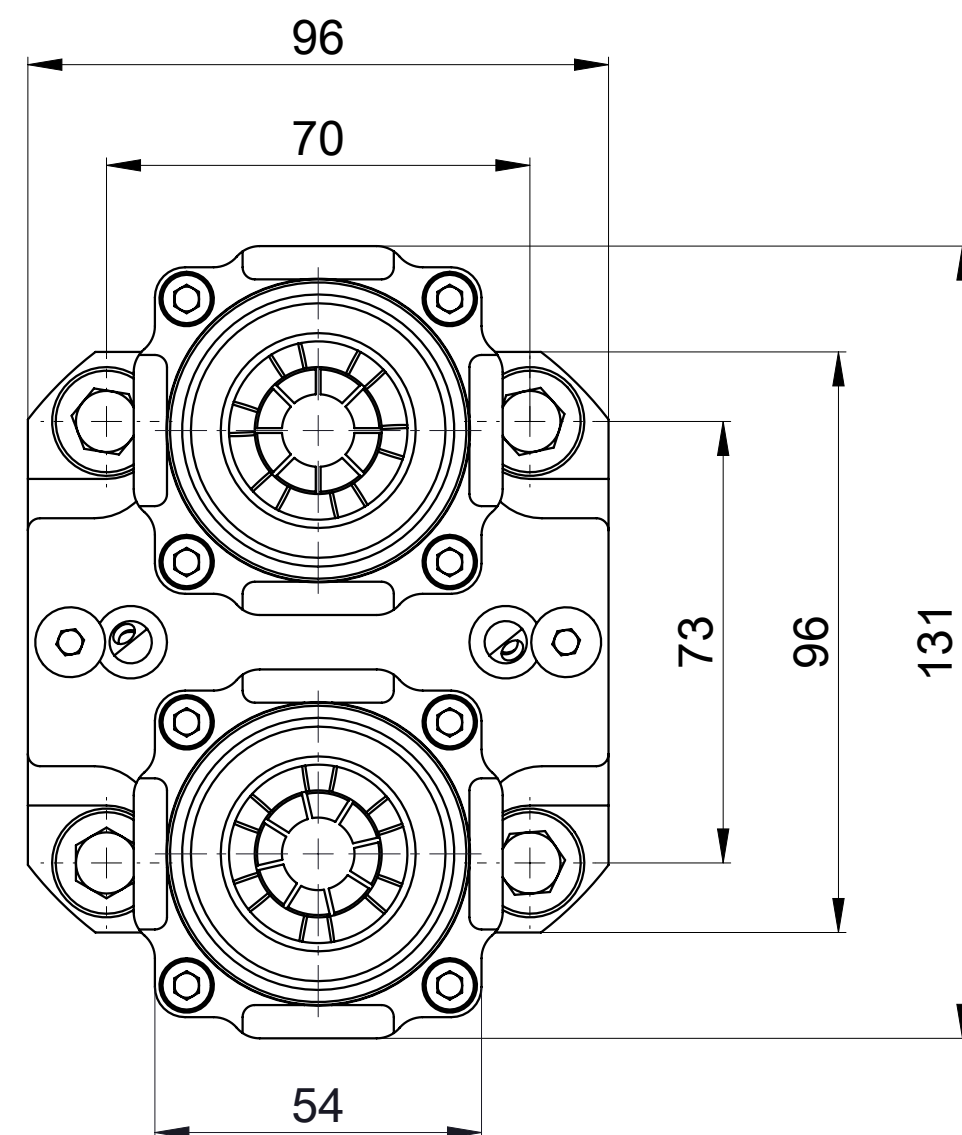

! the maximum torque 20Nm
Must be divided equally
on each spindle
that works simultaneously
1:20/2:10

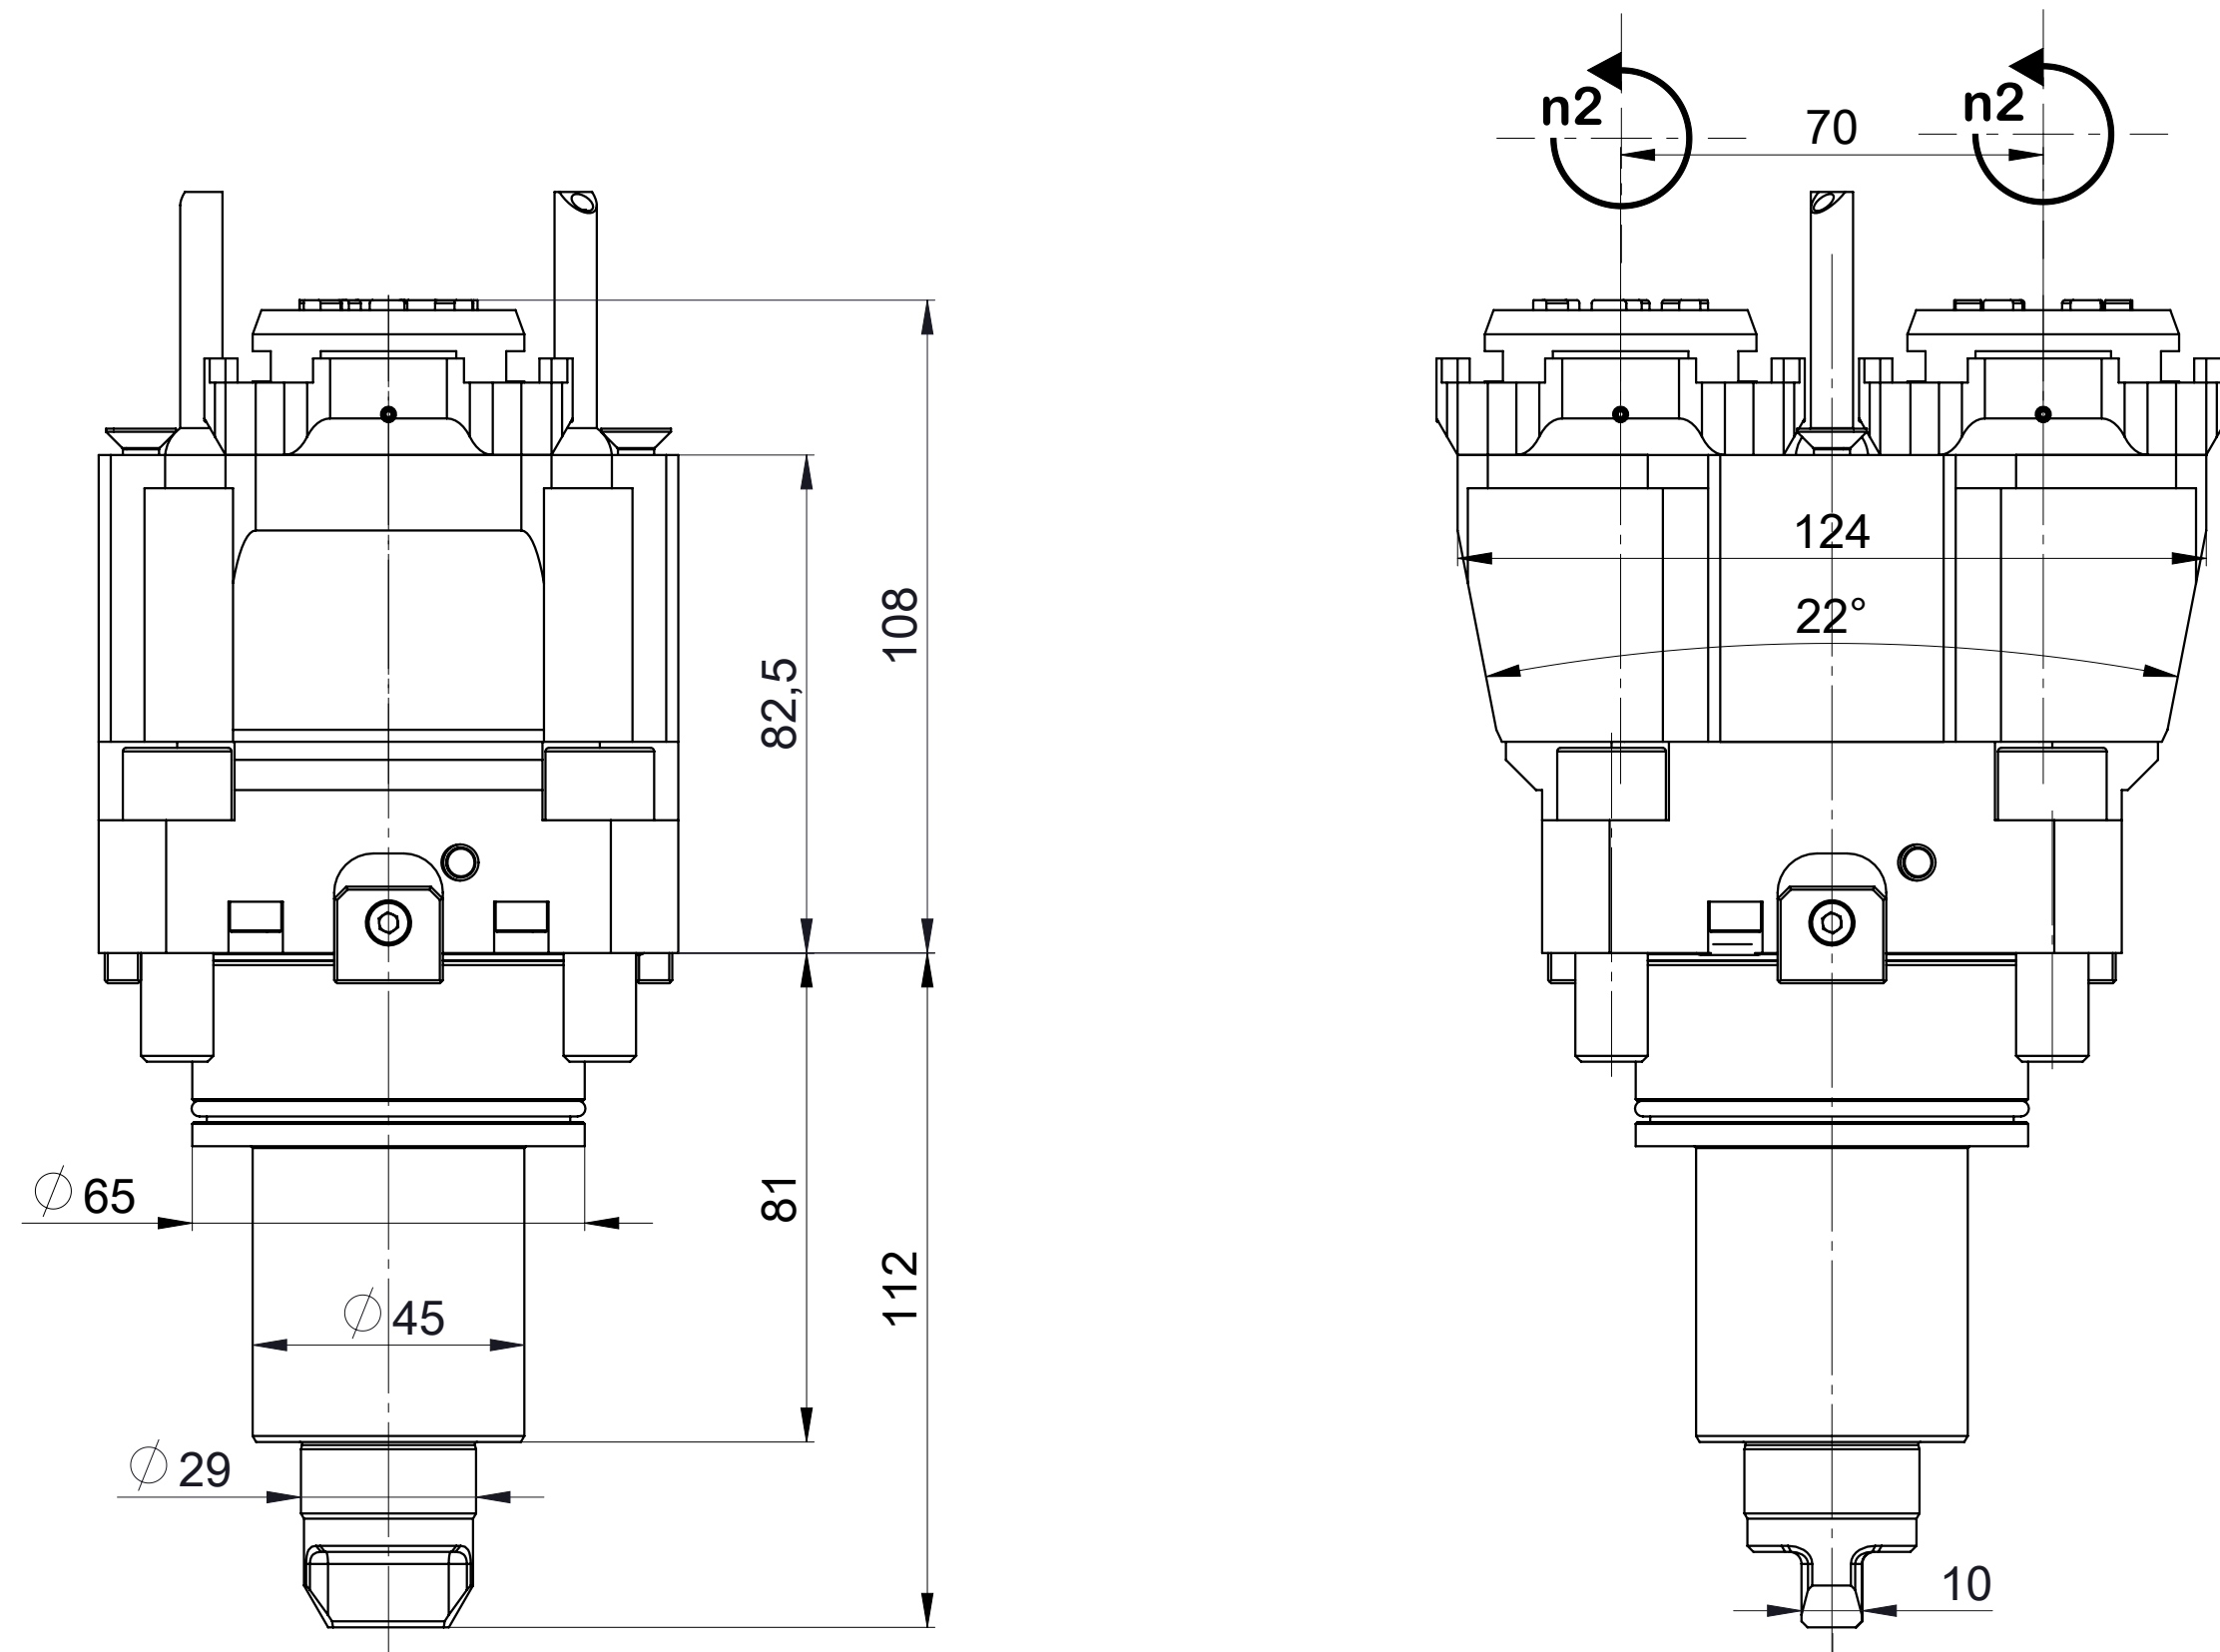

Codice commerciale
Commercial code
RAPPTYH25I121UT65P/70

Denominazione
Denomination
Driven tool-Axial 0° double Y axis



Scheda Tecnica
Data Sheet



Website

N° giri Speed max (out) 6000 rpm	Refrigerazione Coolant EC	Rapporto n1:n2 Ratio 1:1	Input BMT65	N° disegno Item code AMT632T-HP
Pressione max Pressure max bar	Filtrazione Filtration µm	Coppia max Max torque T2 20 Nm	Output ER25-INT	Peso Wheight 6.586 kg

QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETÀ. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESSO SE RICHIESTO
THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST
DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFÄLTIGT NOCH DITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN