



DIN6499-ER40

Ø3-26 mm

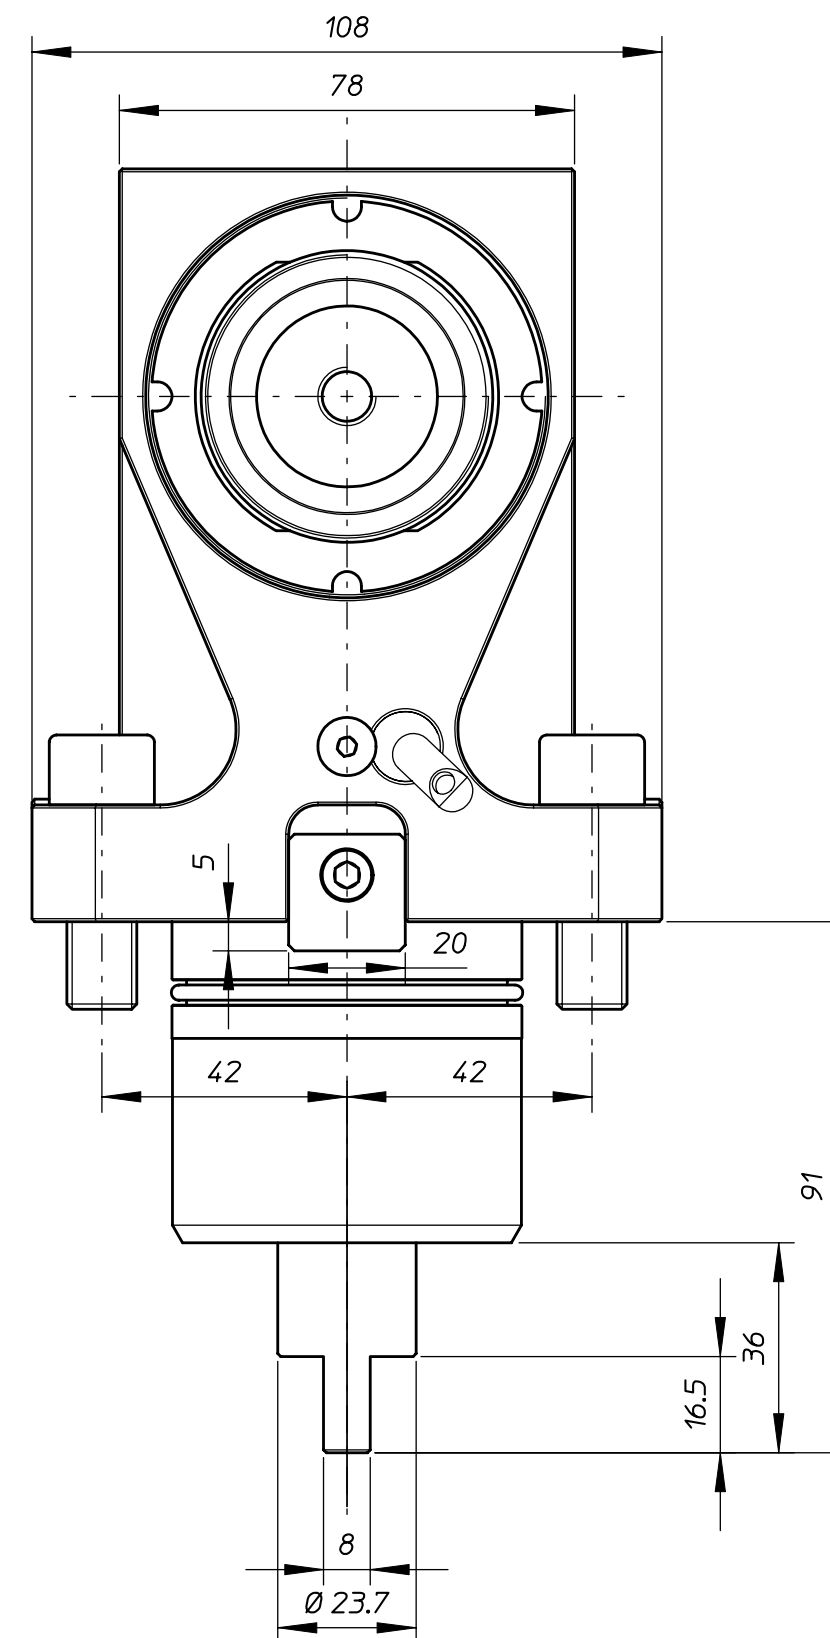

$n2 : n1 = -1$
 $n2 \text{ max} = 6000 \text{ 1/min}$
 $M2 \text{ max} = 63 \text{ Nm}$
 $P \text{ max} = 10 \text{ kW}$
 $p \text{ max} = 70 \text{ Bar}$

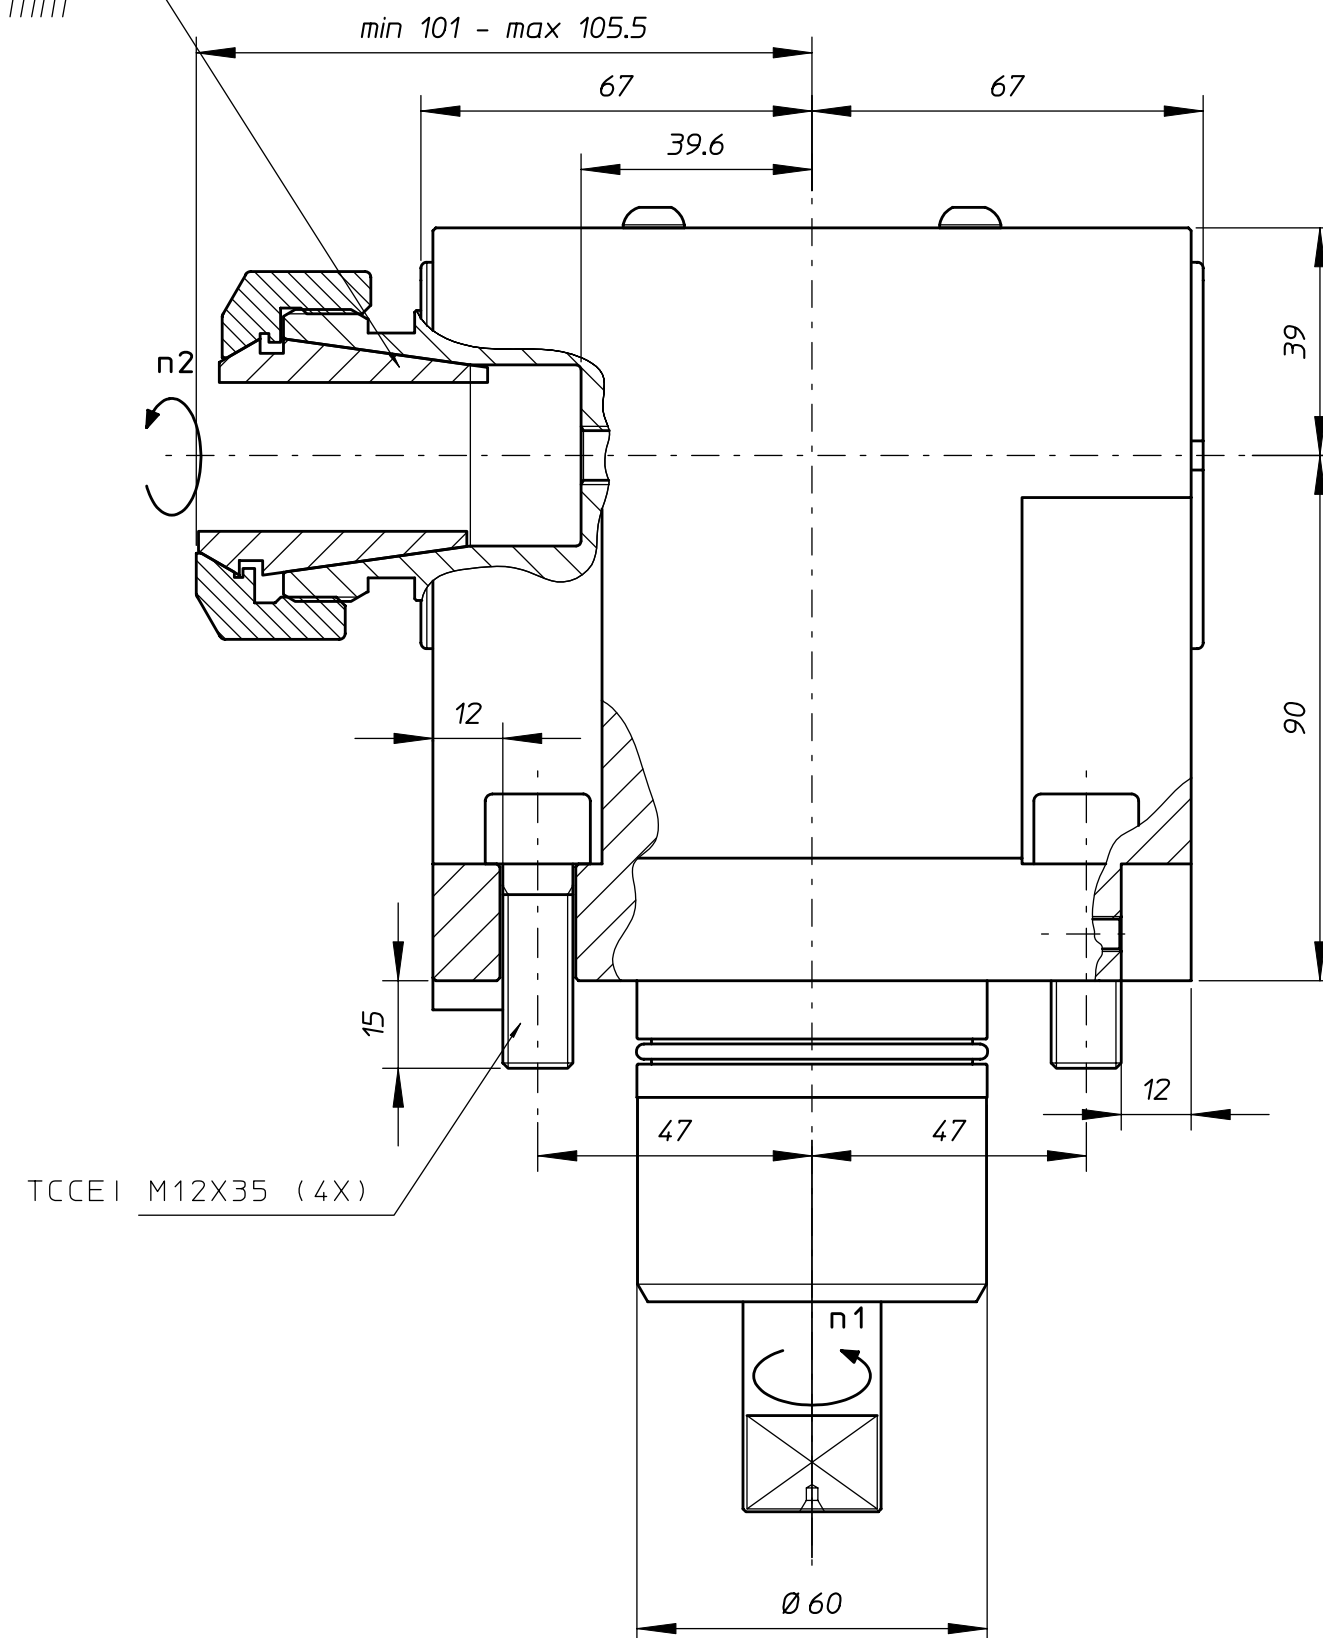

ALGRA S.p.A.

DENOMINAZIONE

Portautensile motorizzato 90°
standard refrigerazione int/ext per
macchine GOODWAY GS2000/3000

DISEGNATO

MB

DATA

04.02.08

DISEGNO

RRPPS 40 131UG4