

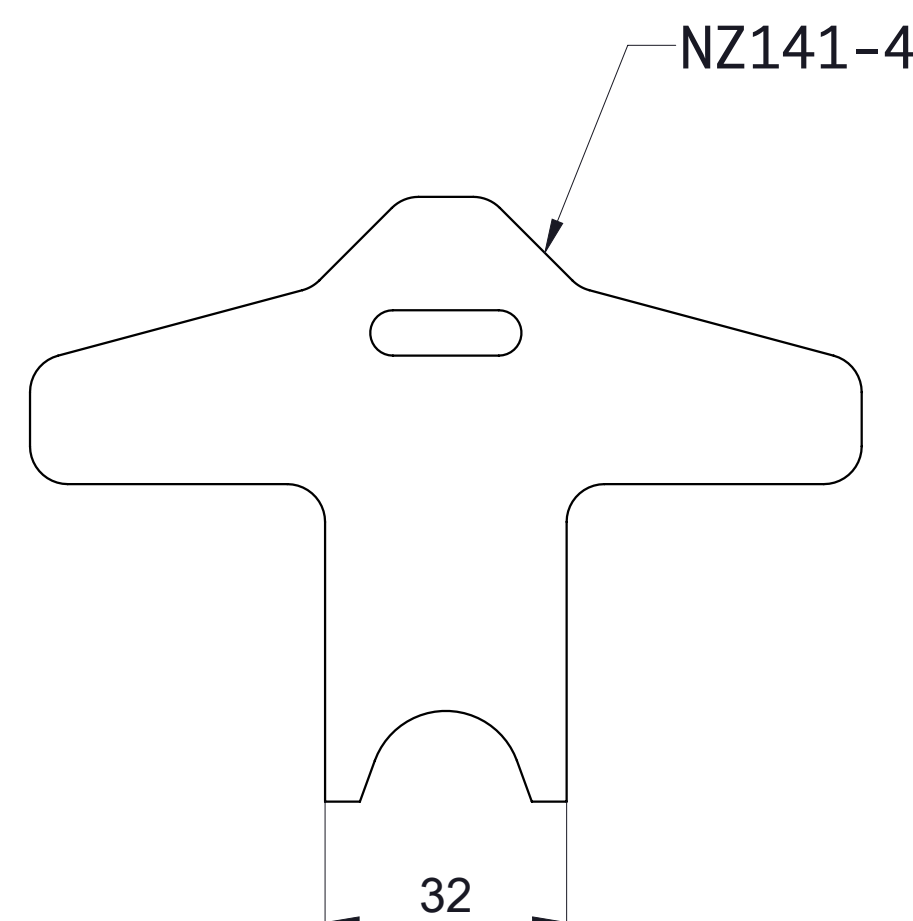
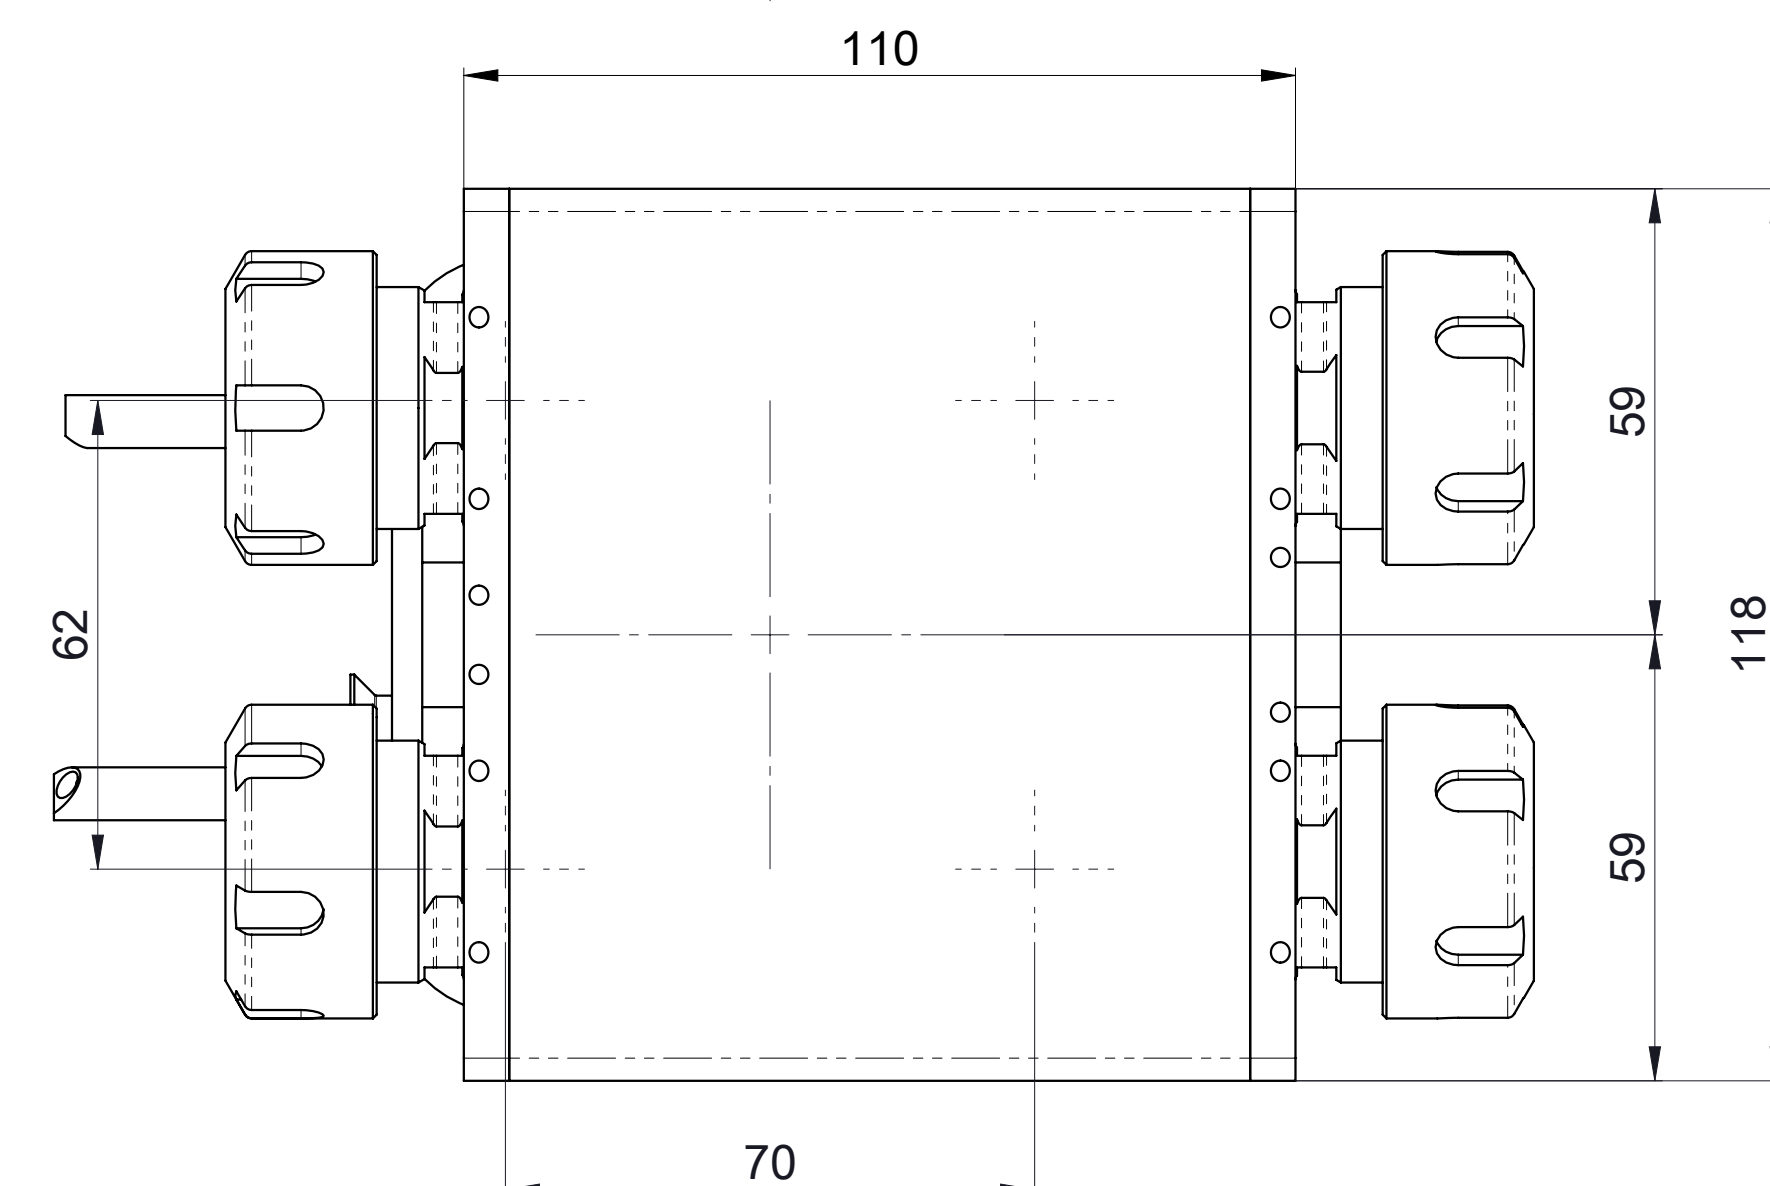
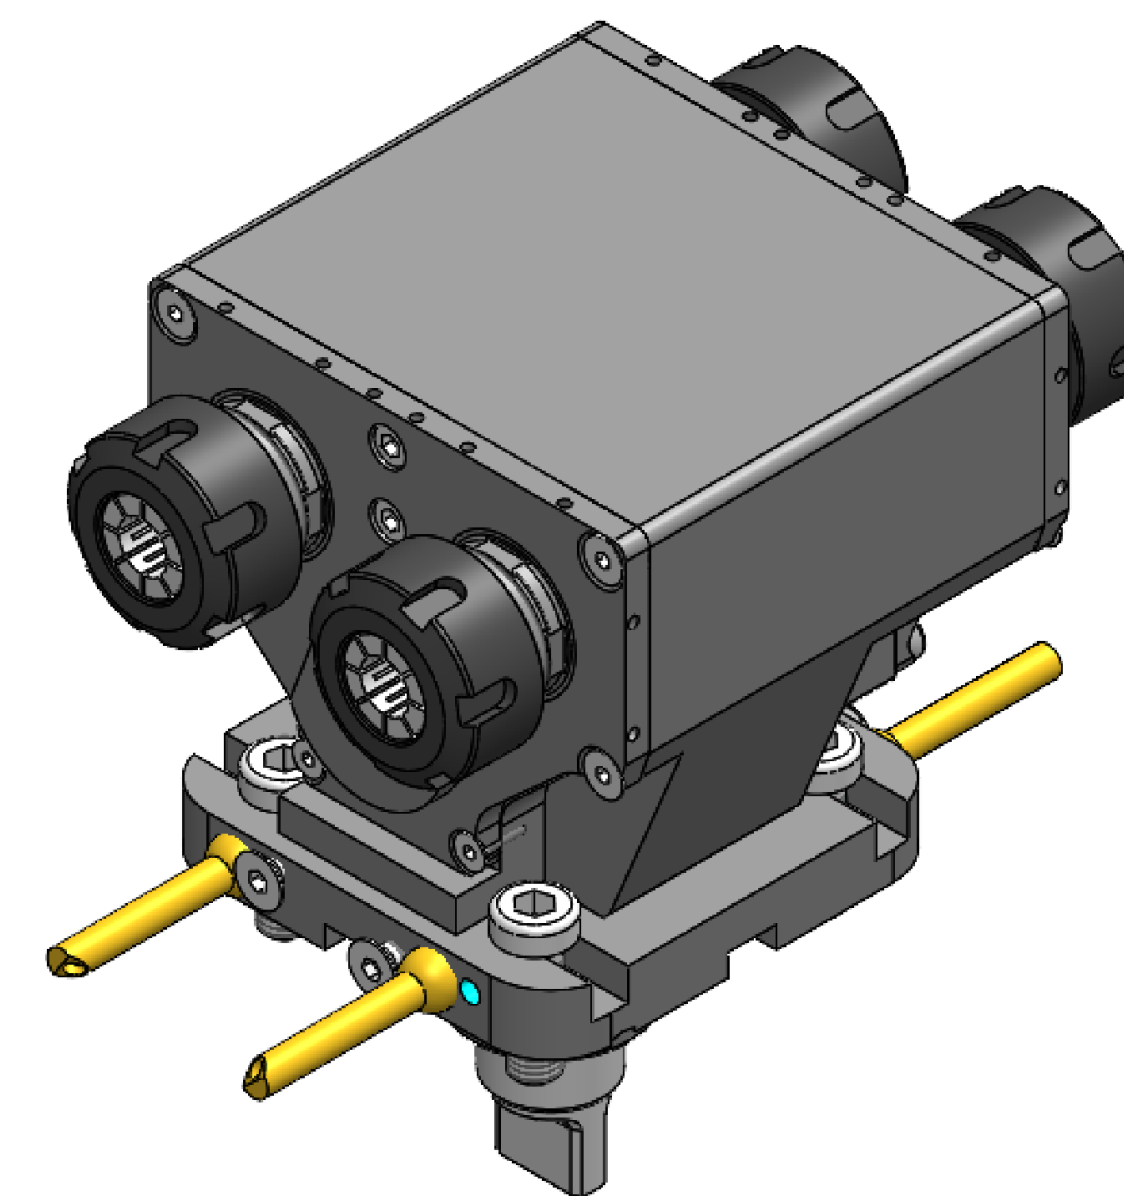


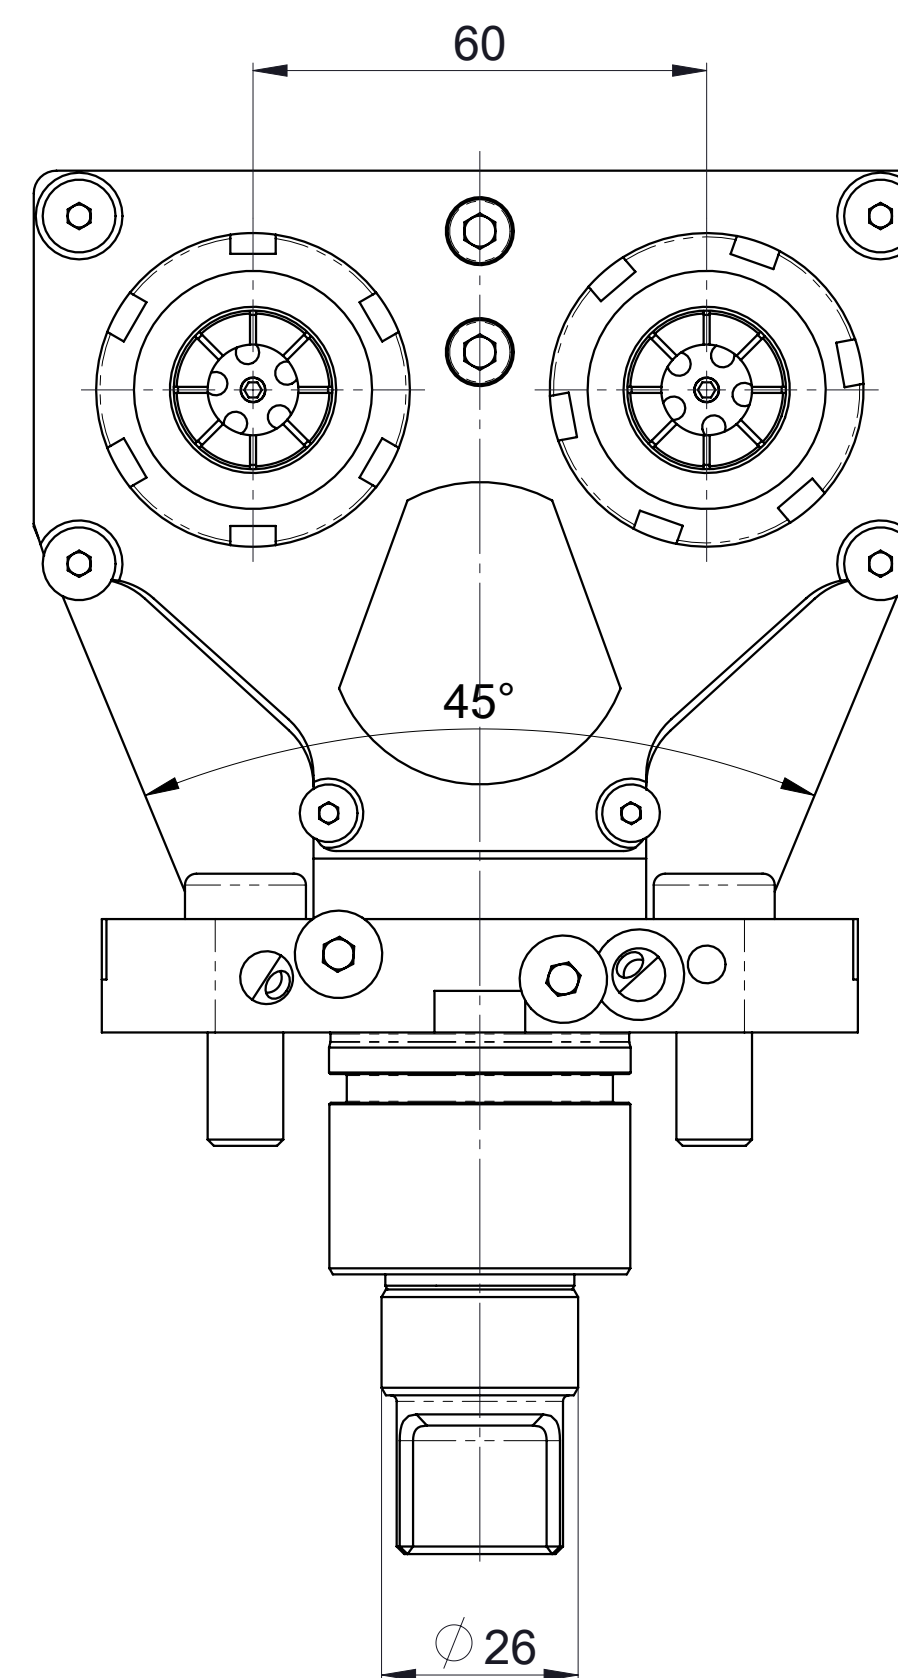

!
The maximum torque 40Nm
must be divided equally
on each spindle
that works simultaneously
1:40/2:20
3:13.5/4:10

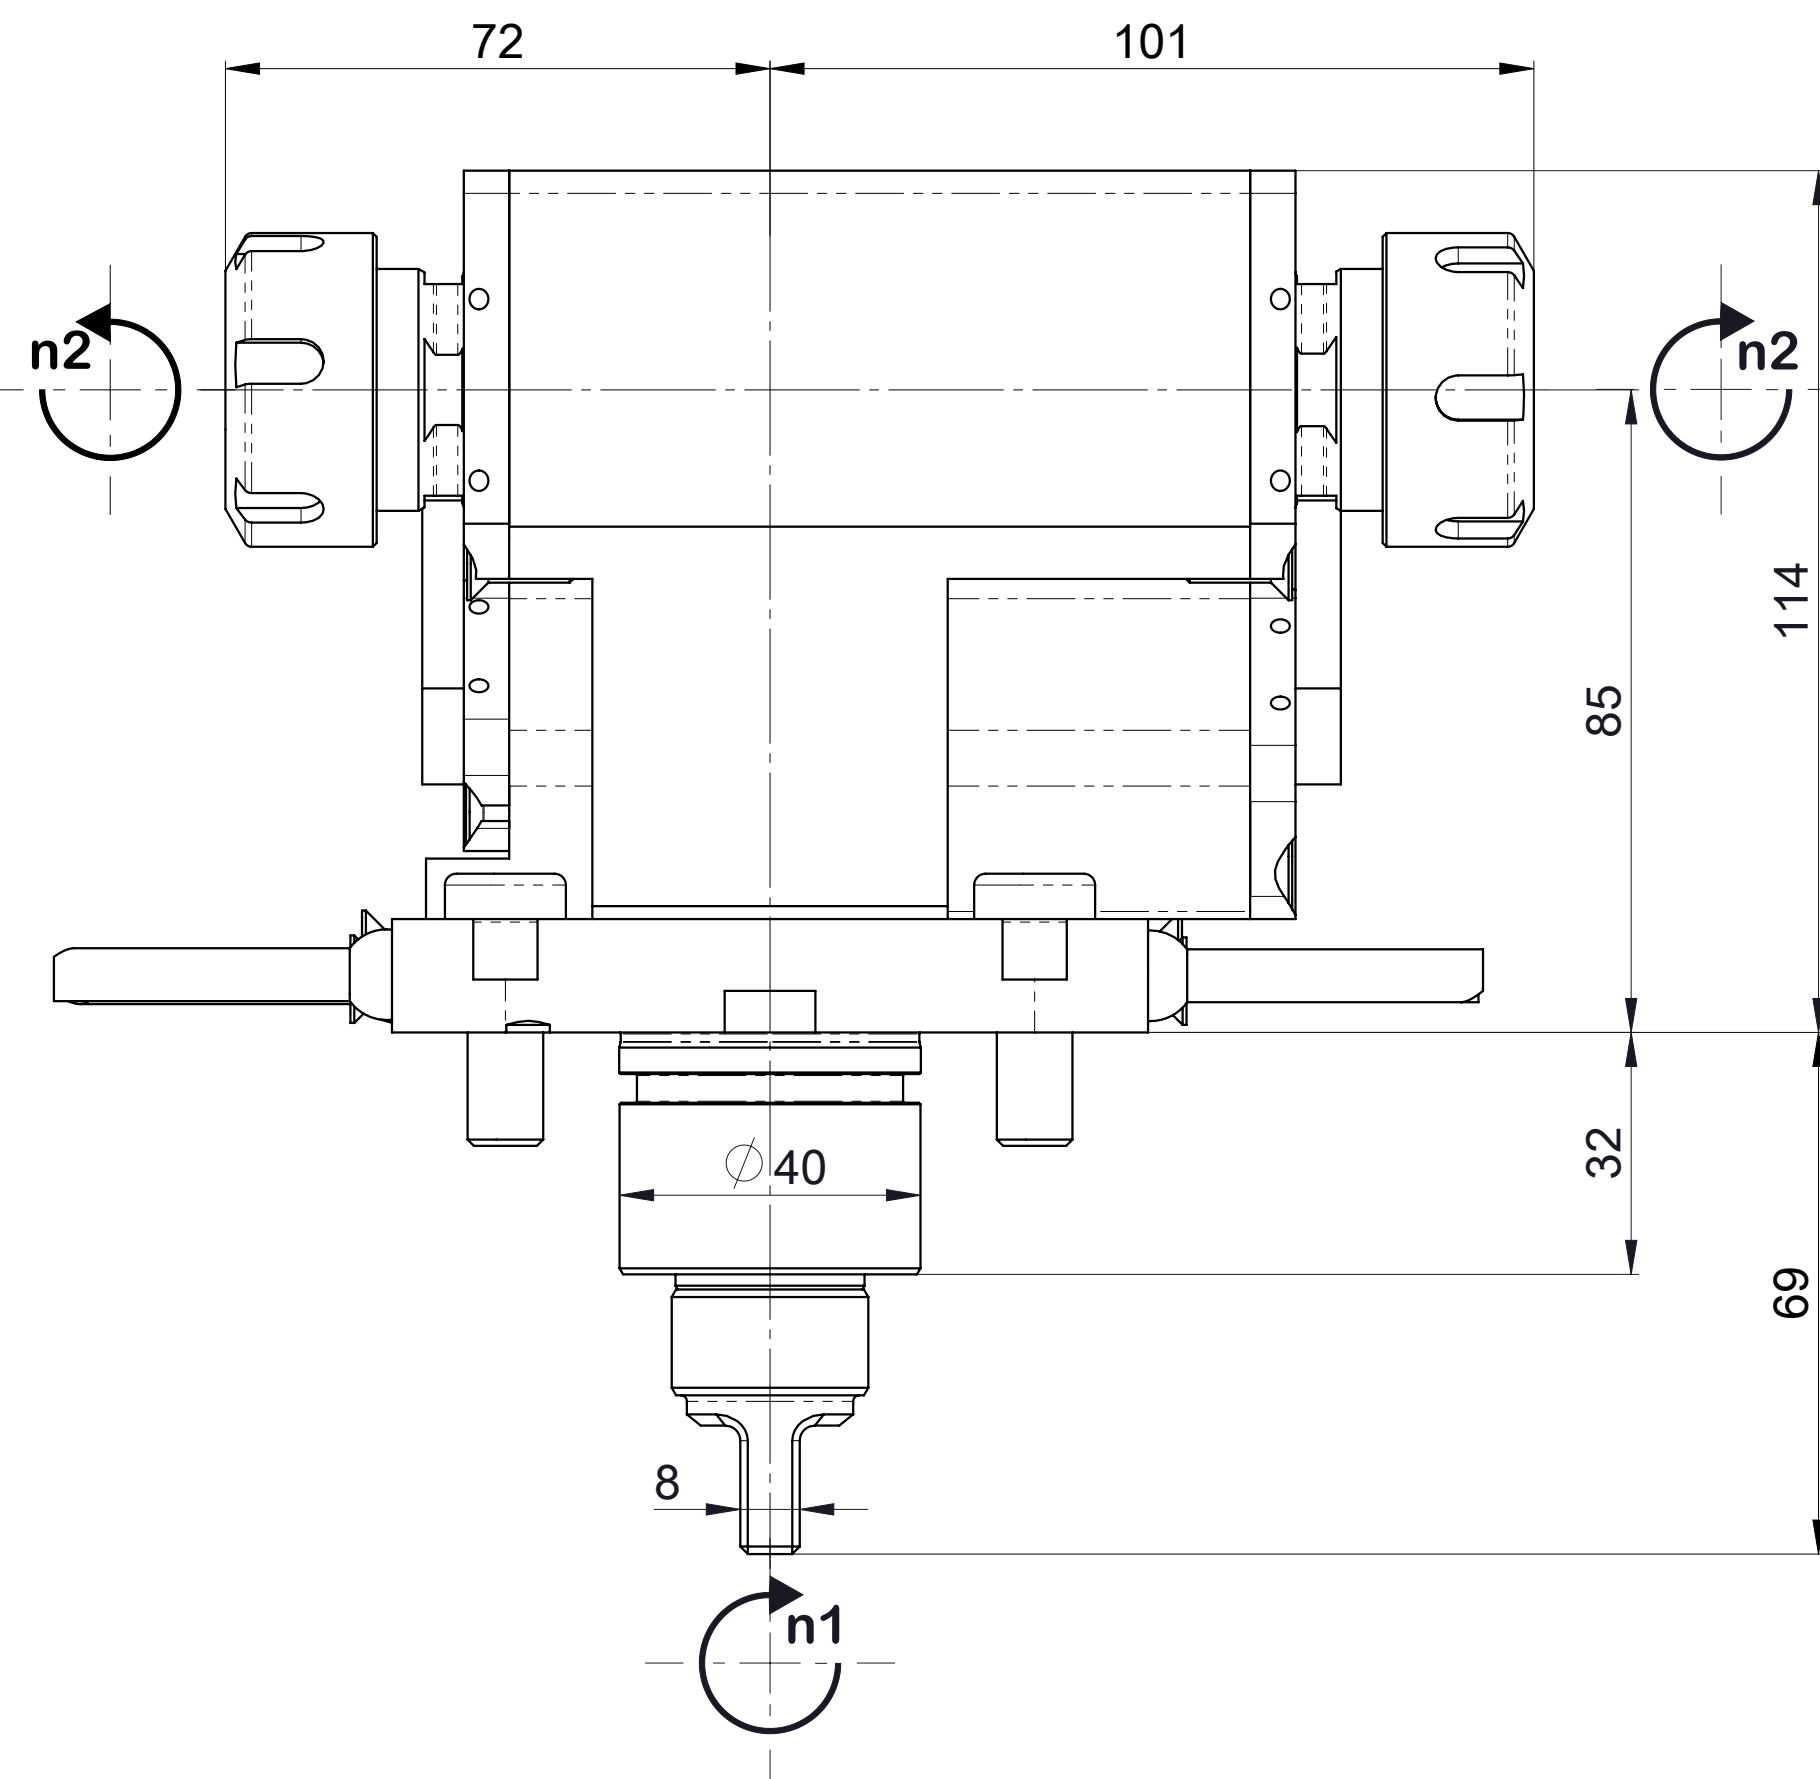

Commercial Code:			
RRPPTYH25 121UNZ/60			
Denomination:		Item Code:	
Driven tool-Radial 90° both side Y axis		ANZ141H	
Speed Max (out)	Coolant	Weight	
6000rpm	EC	8.878Kg	
Transmission Ratio n1:n2	T2. Max	Info: ALGRA S.p.A. Via Manzoni 41, I-24031 Almenno S.Salvatore (BG) Tel. +39 035642051 Fax +39 035640128 algra.accessori@algra.it	
1:1 ↻ ↻ ↻	 40 Nm		
Pressure Max	Filtration		
bar	µm		
InPut	Output		
NZ	ER25-EXT		
QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETÀ. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESSO SE RICHIESTO THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFÄLTIGT NOCH DRITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN			
A2			