

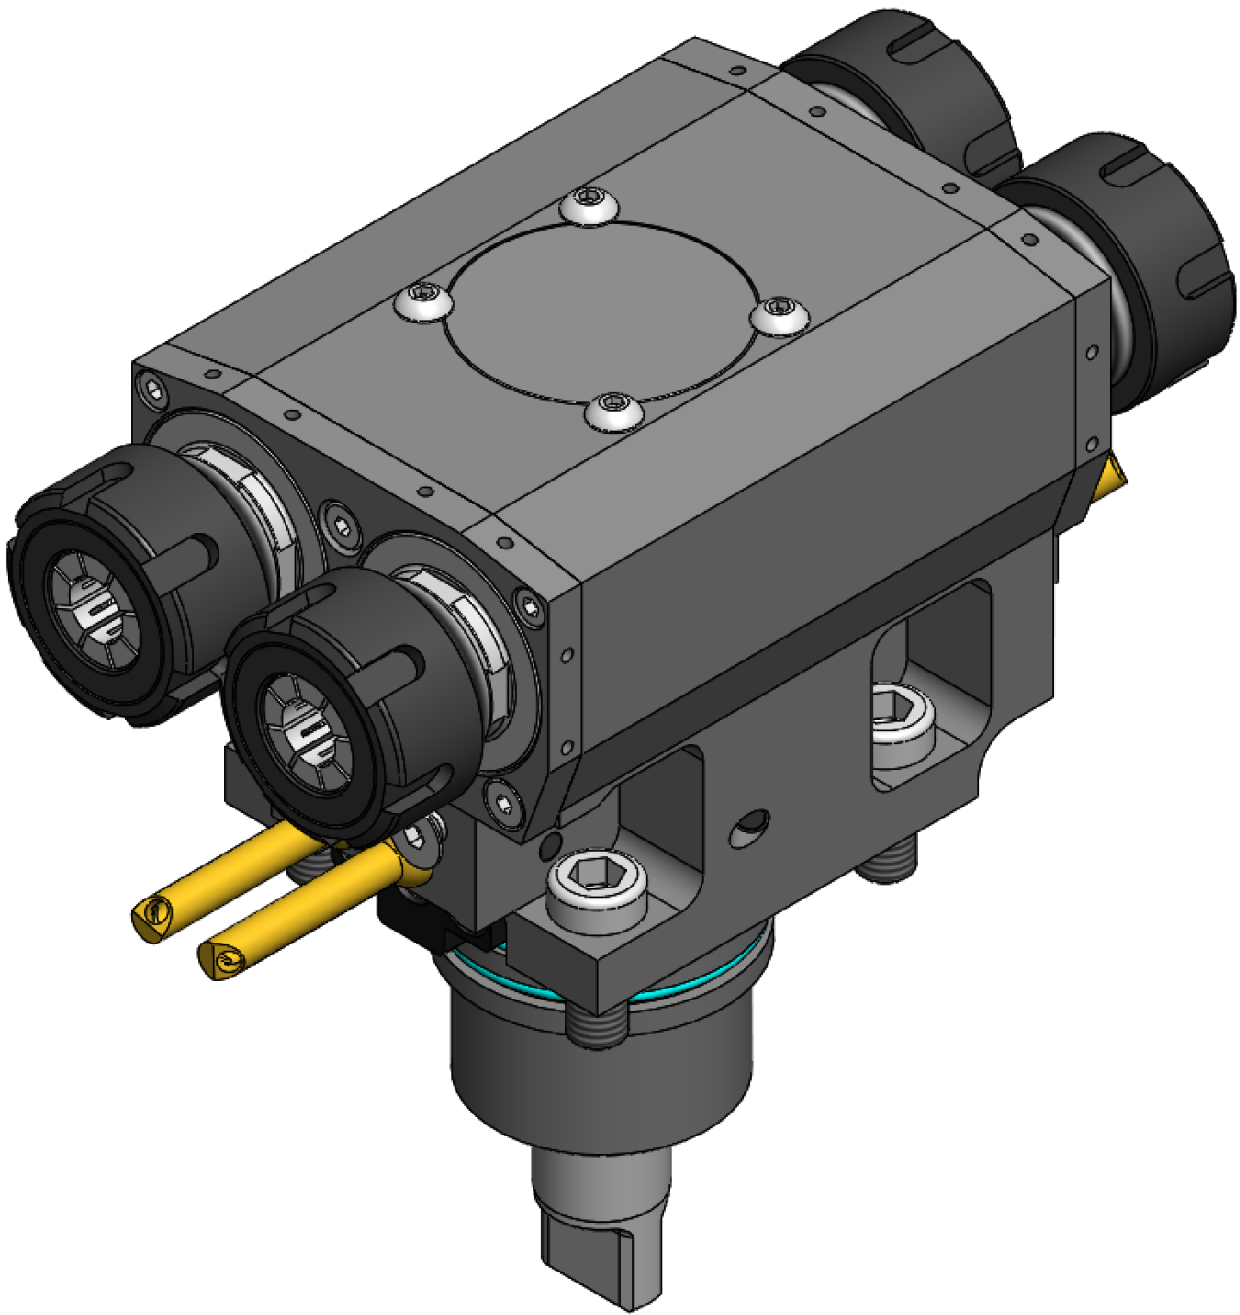
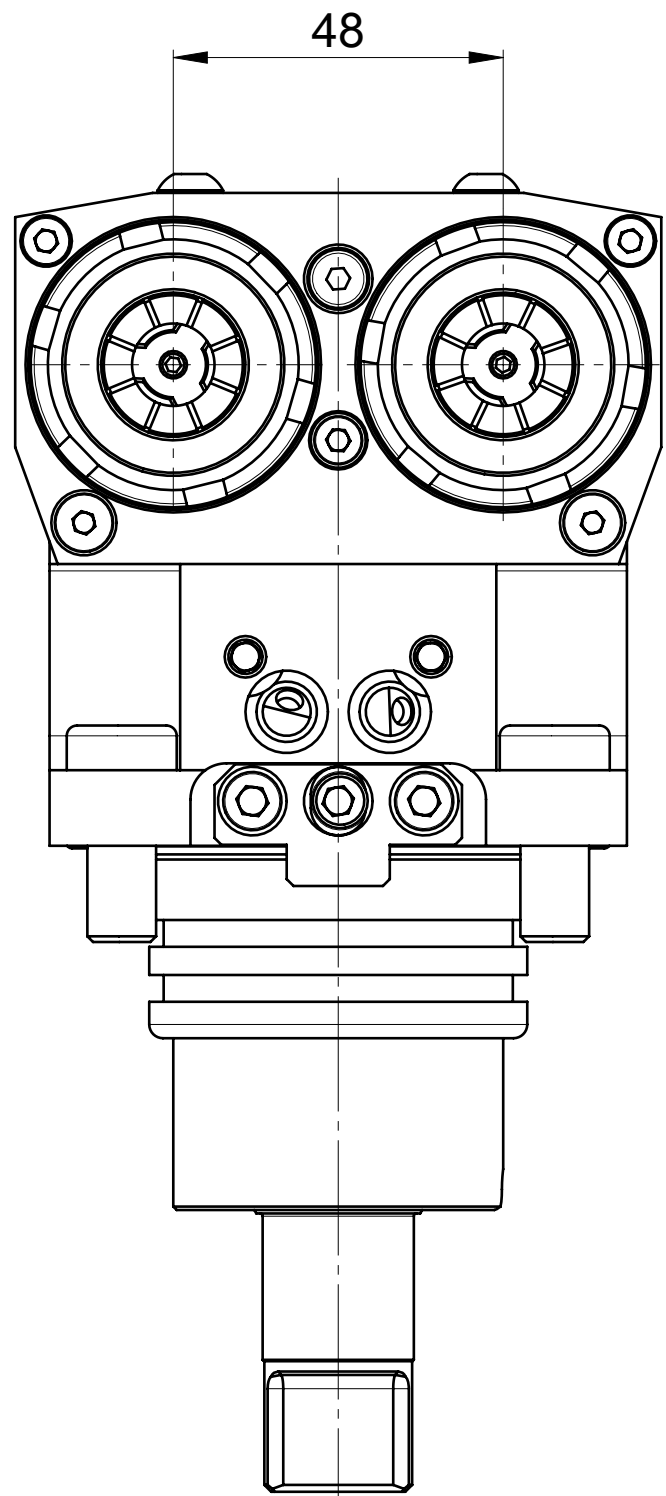
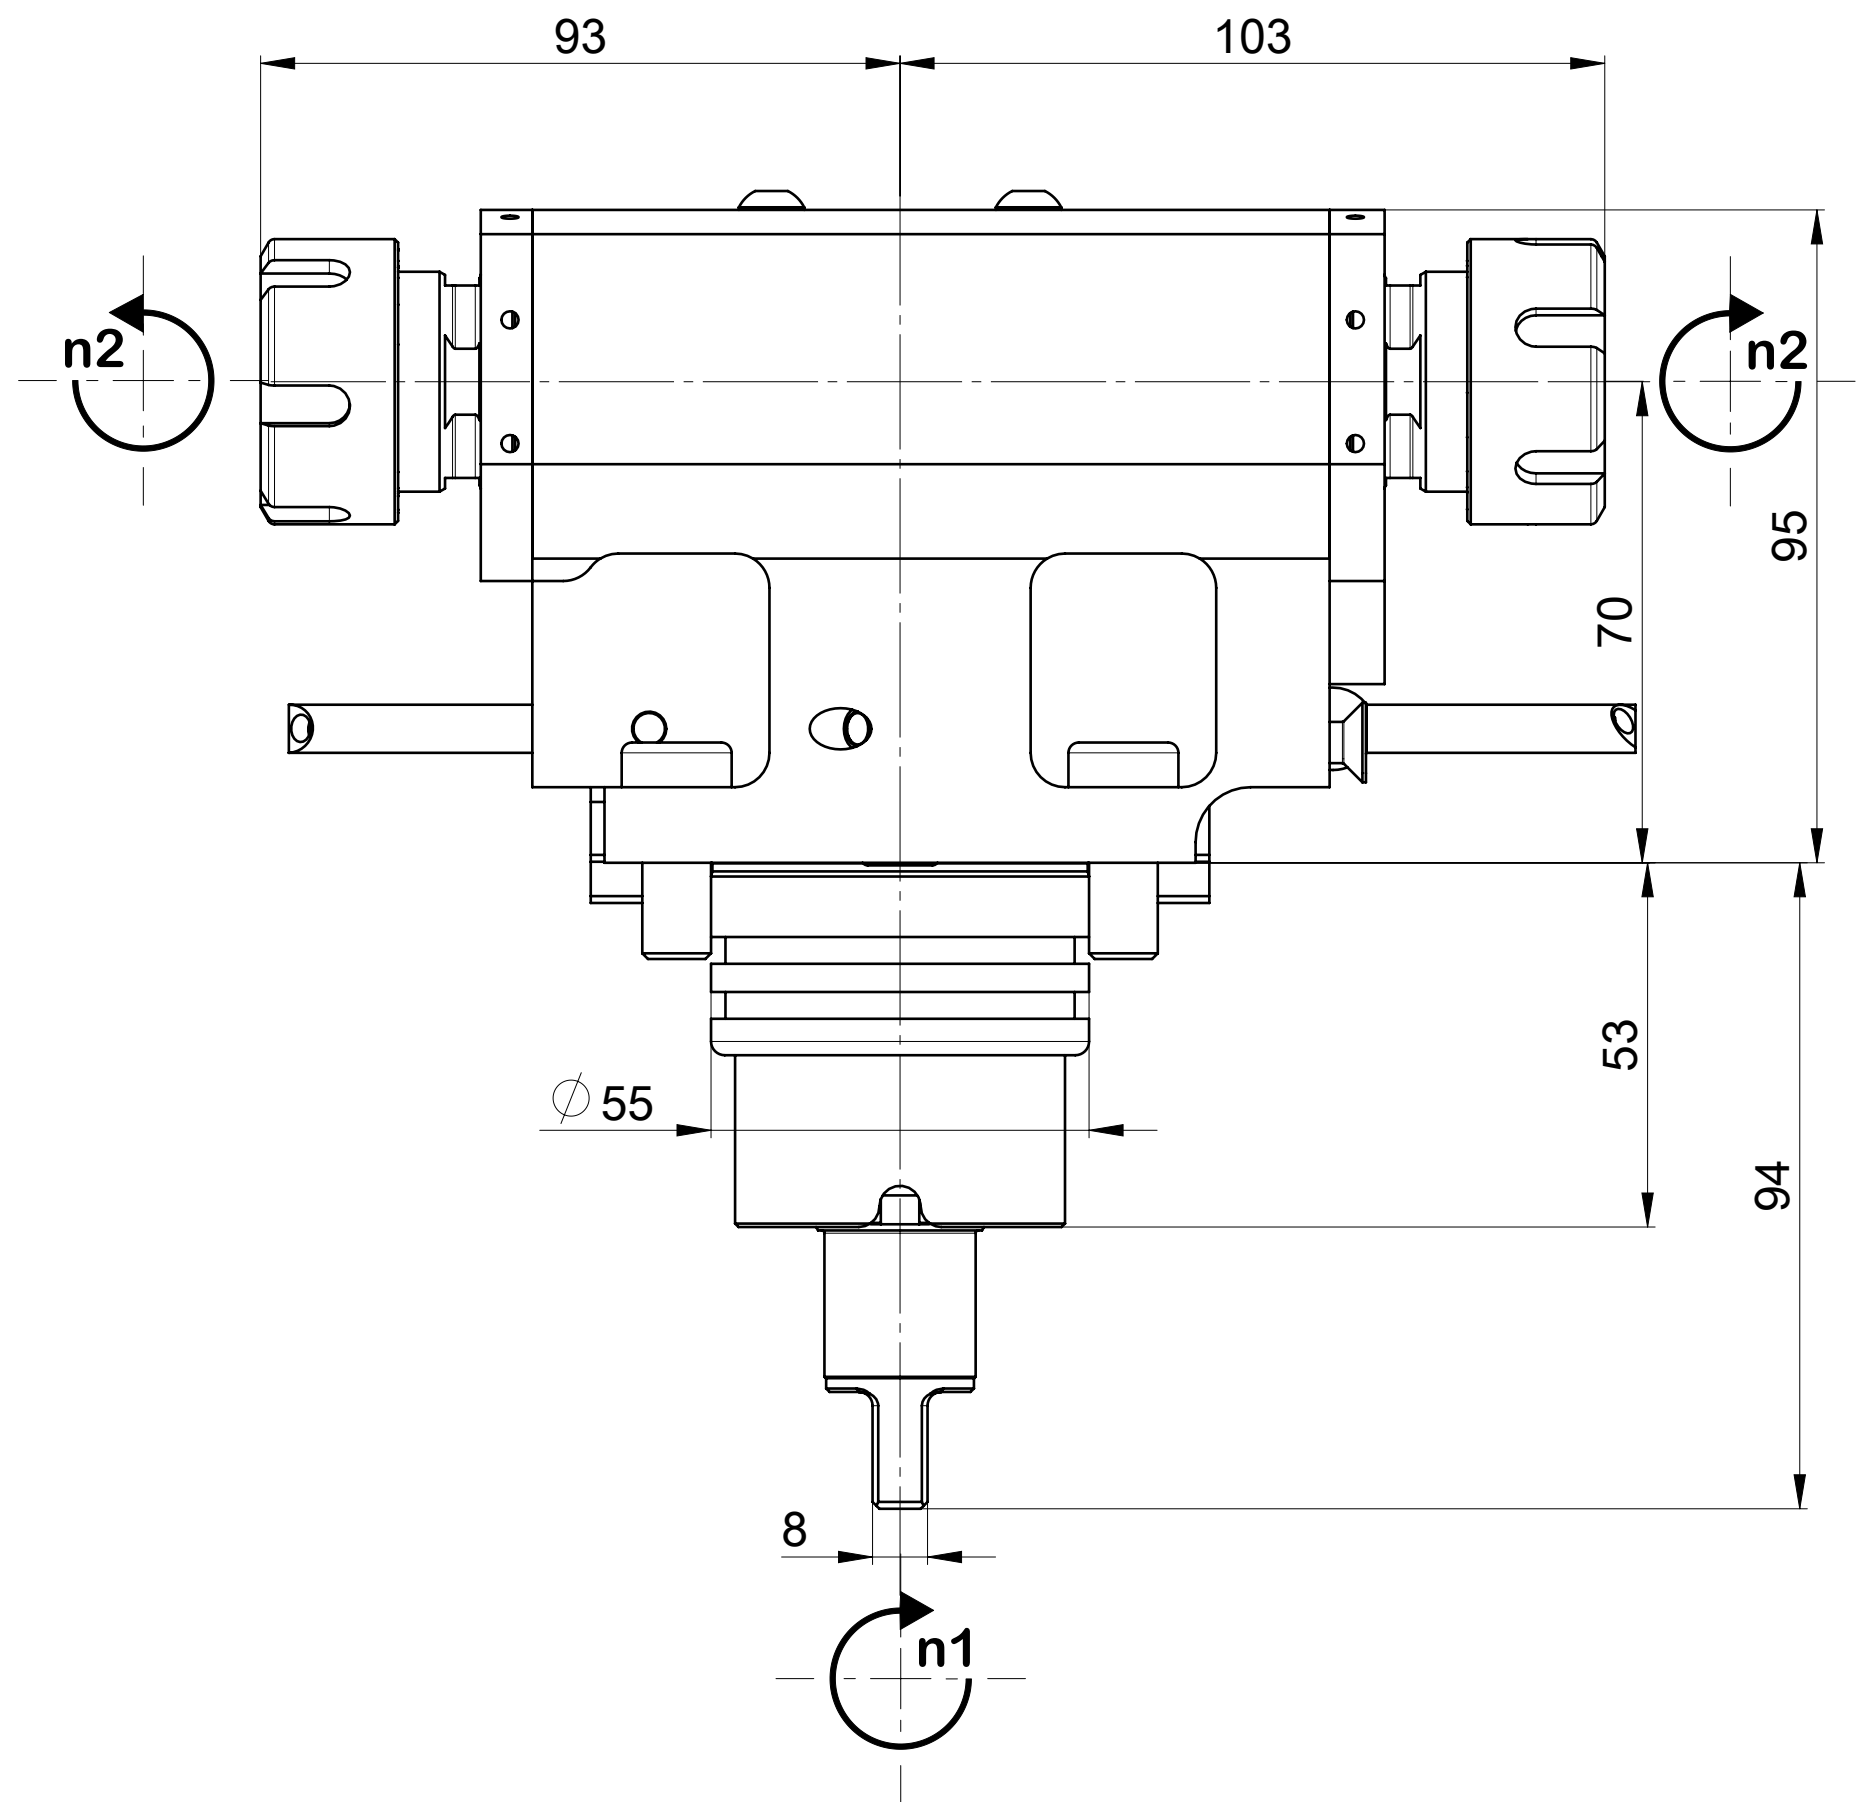


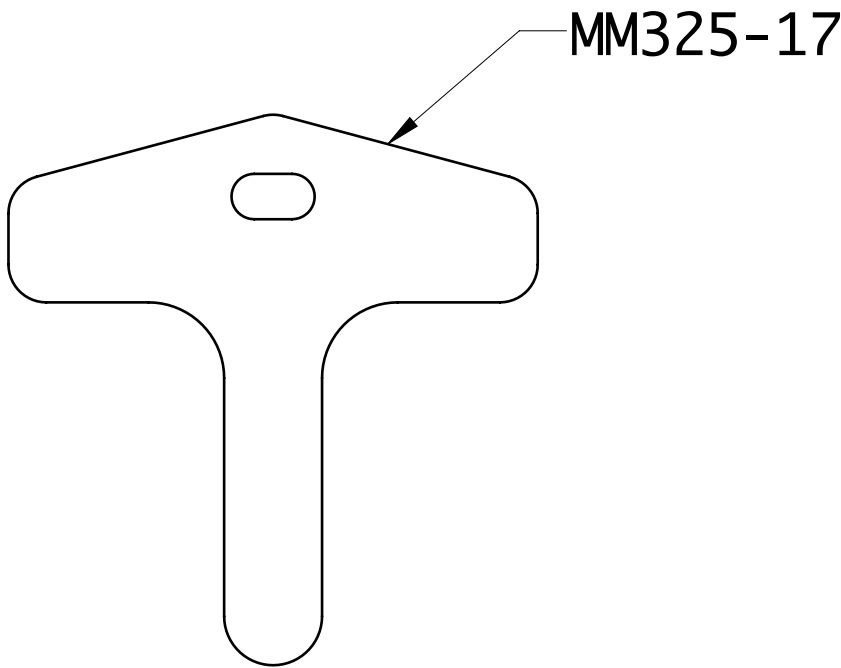

the maximum torque 25Nm
Must be divided equally
on each spindle
that works simultaneously
1:25/2:12.5
3:8/4:6

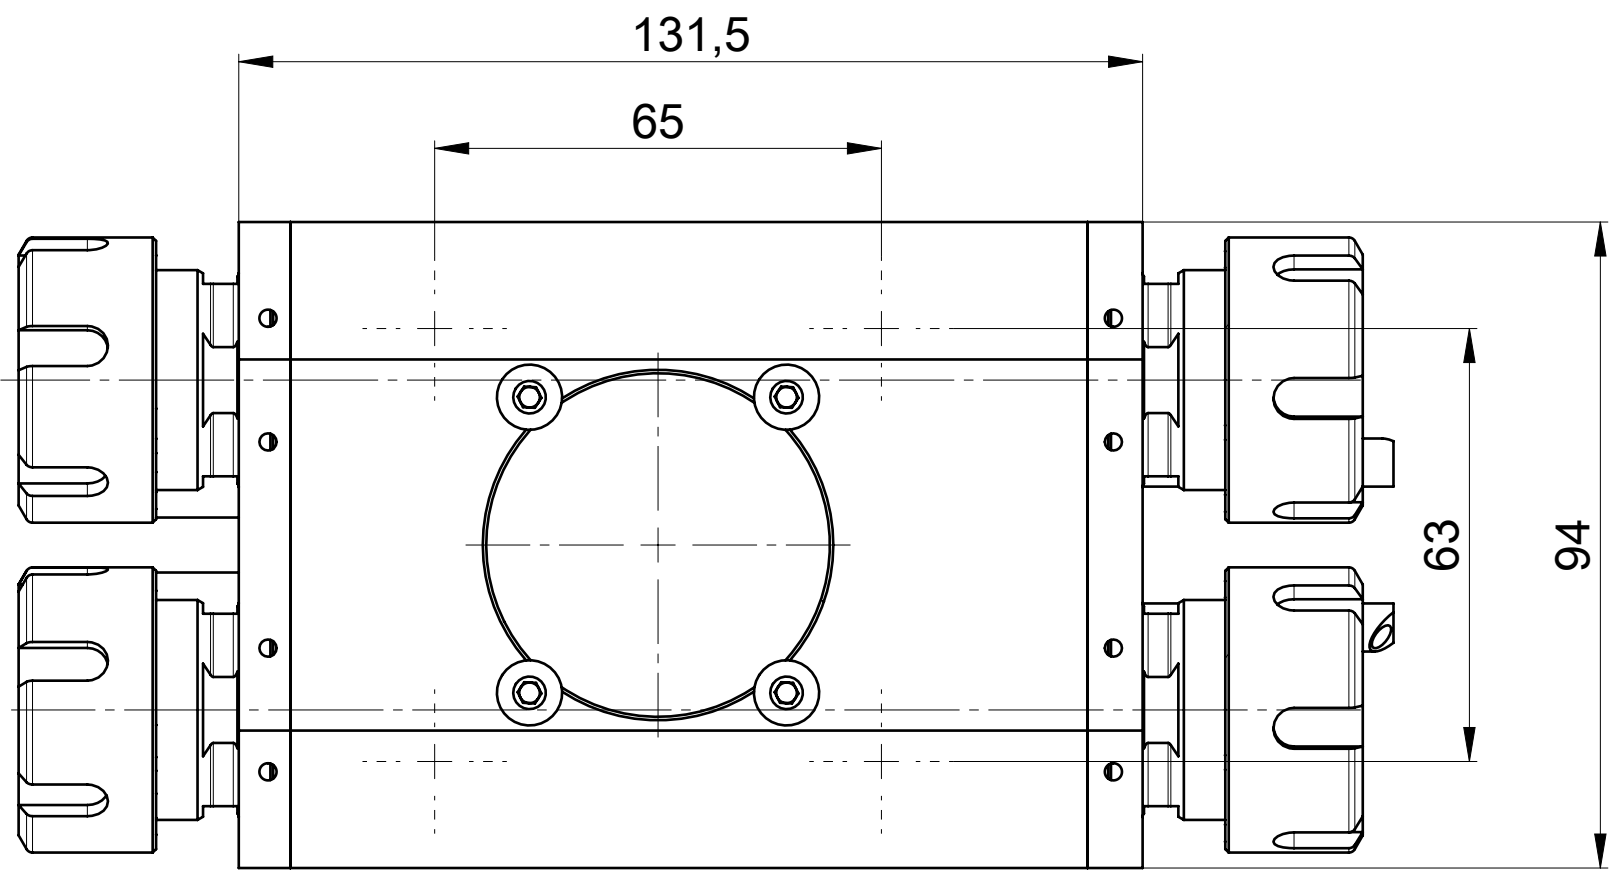

Commercial Code:		RRPPTYH25 321UB55/48	
Denomination:		Item Code:	
Driven tool-Radial 90° both side Y axis		AMB531H	
Speed Max (out)	Coolant	Weight	
6000rpm	EC	7.895Kg	
Transmission Ratio n1:n2	T2. Max	Info:	ALGRA S.p.A. Via Manzoni 41, I-24031 Almenno S.Salvatore (BG) Tel. +39 035642051 Fax +39 035640128 algra.accessori@algra.it
1:1 UUU	 25 Nm		
Pressure Max	Filtration		
bar	µm		
InPut	Output		
B55	ER 25		
QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETA'. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESO SE RICHIESTO THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFALTIGT NOCH DRITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN			A2