

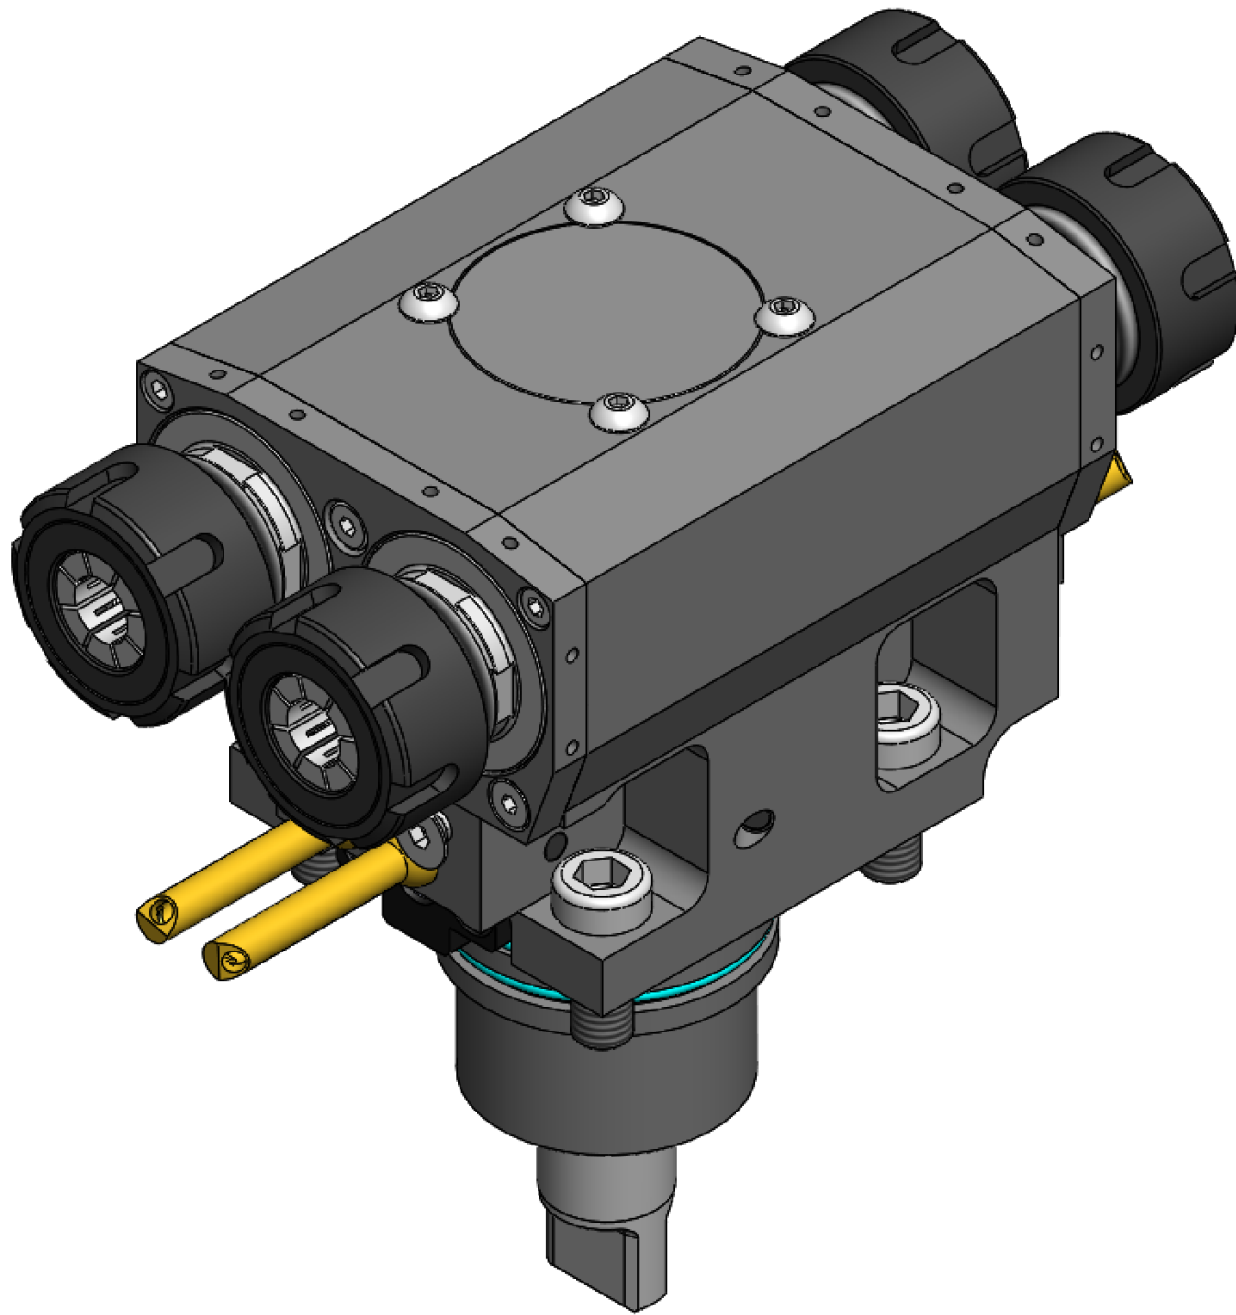
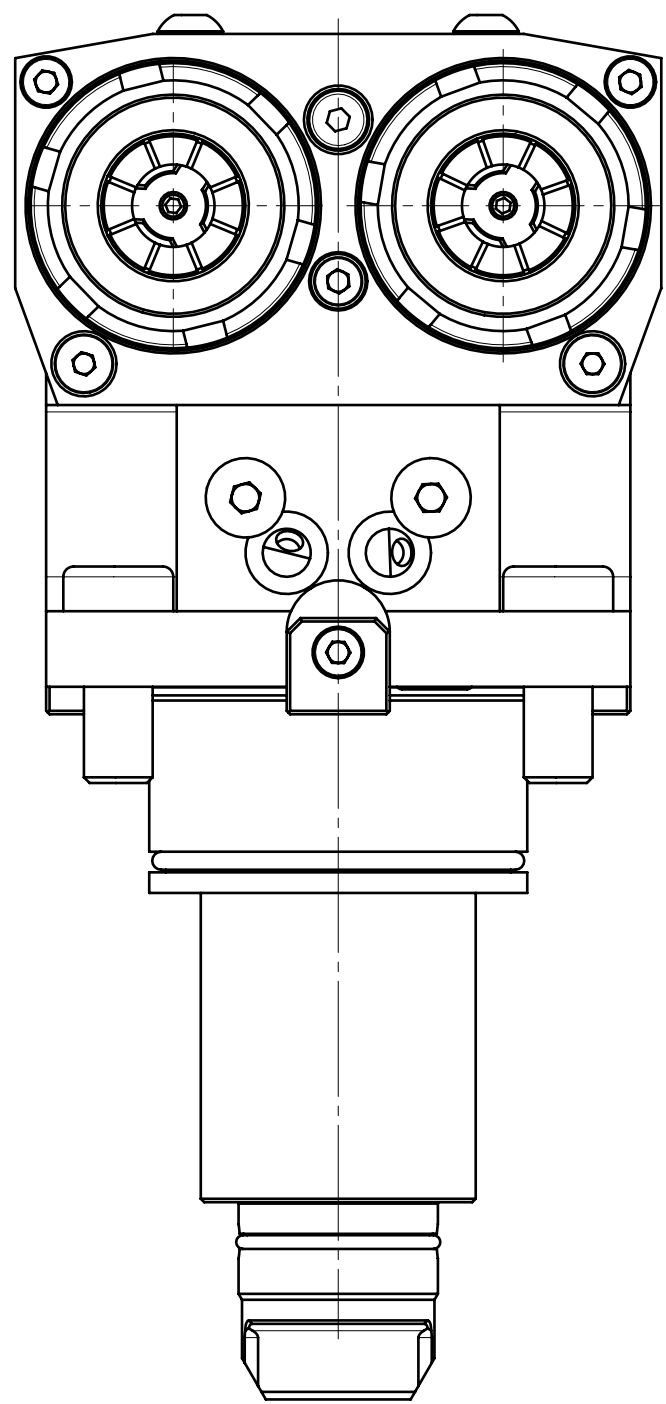
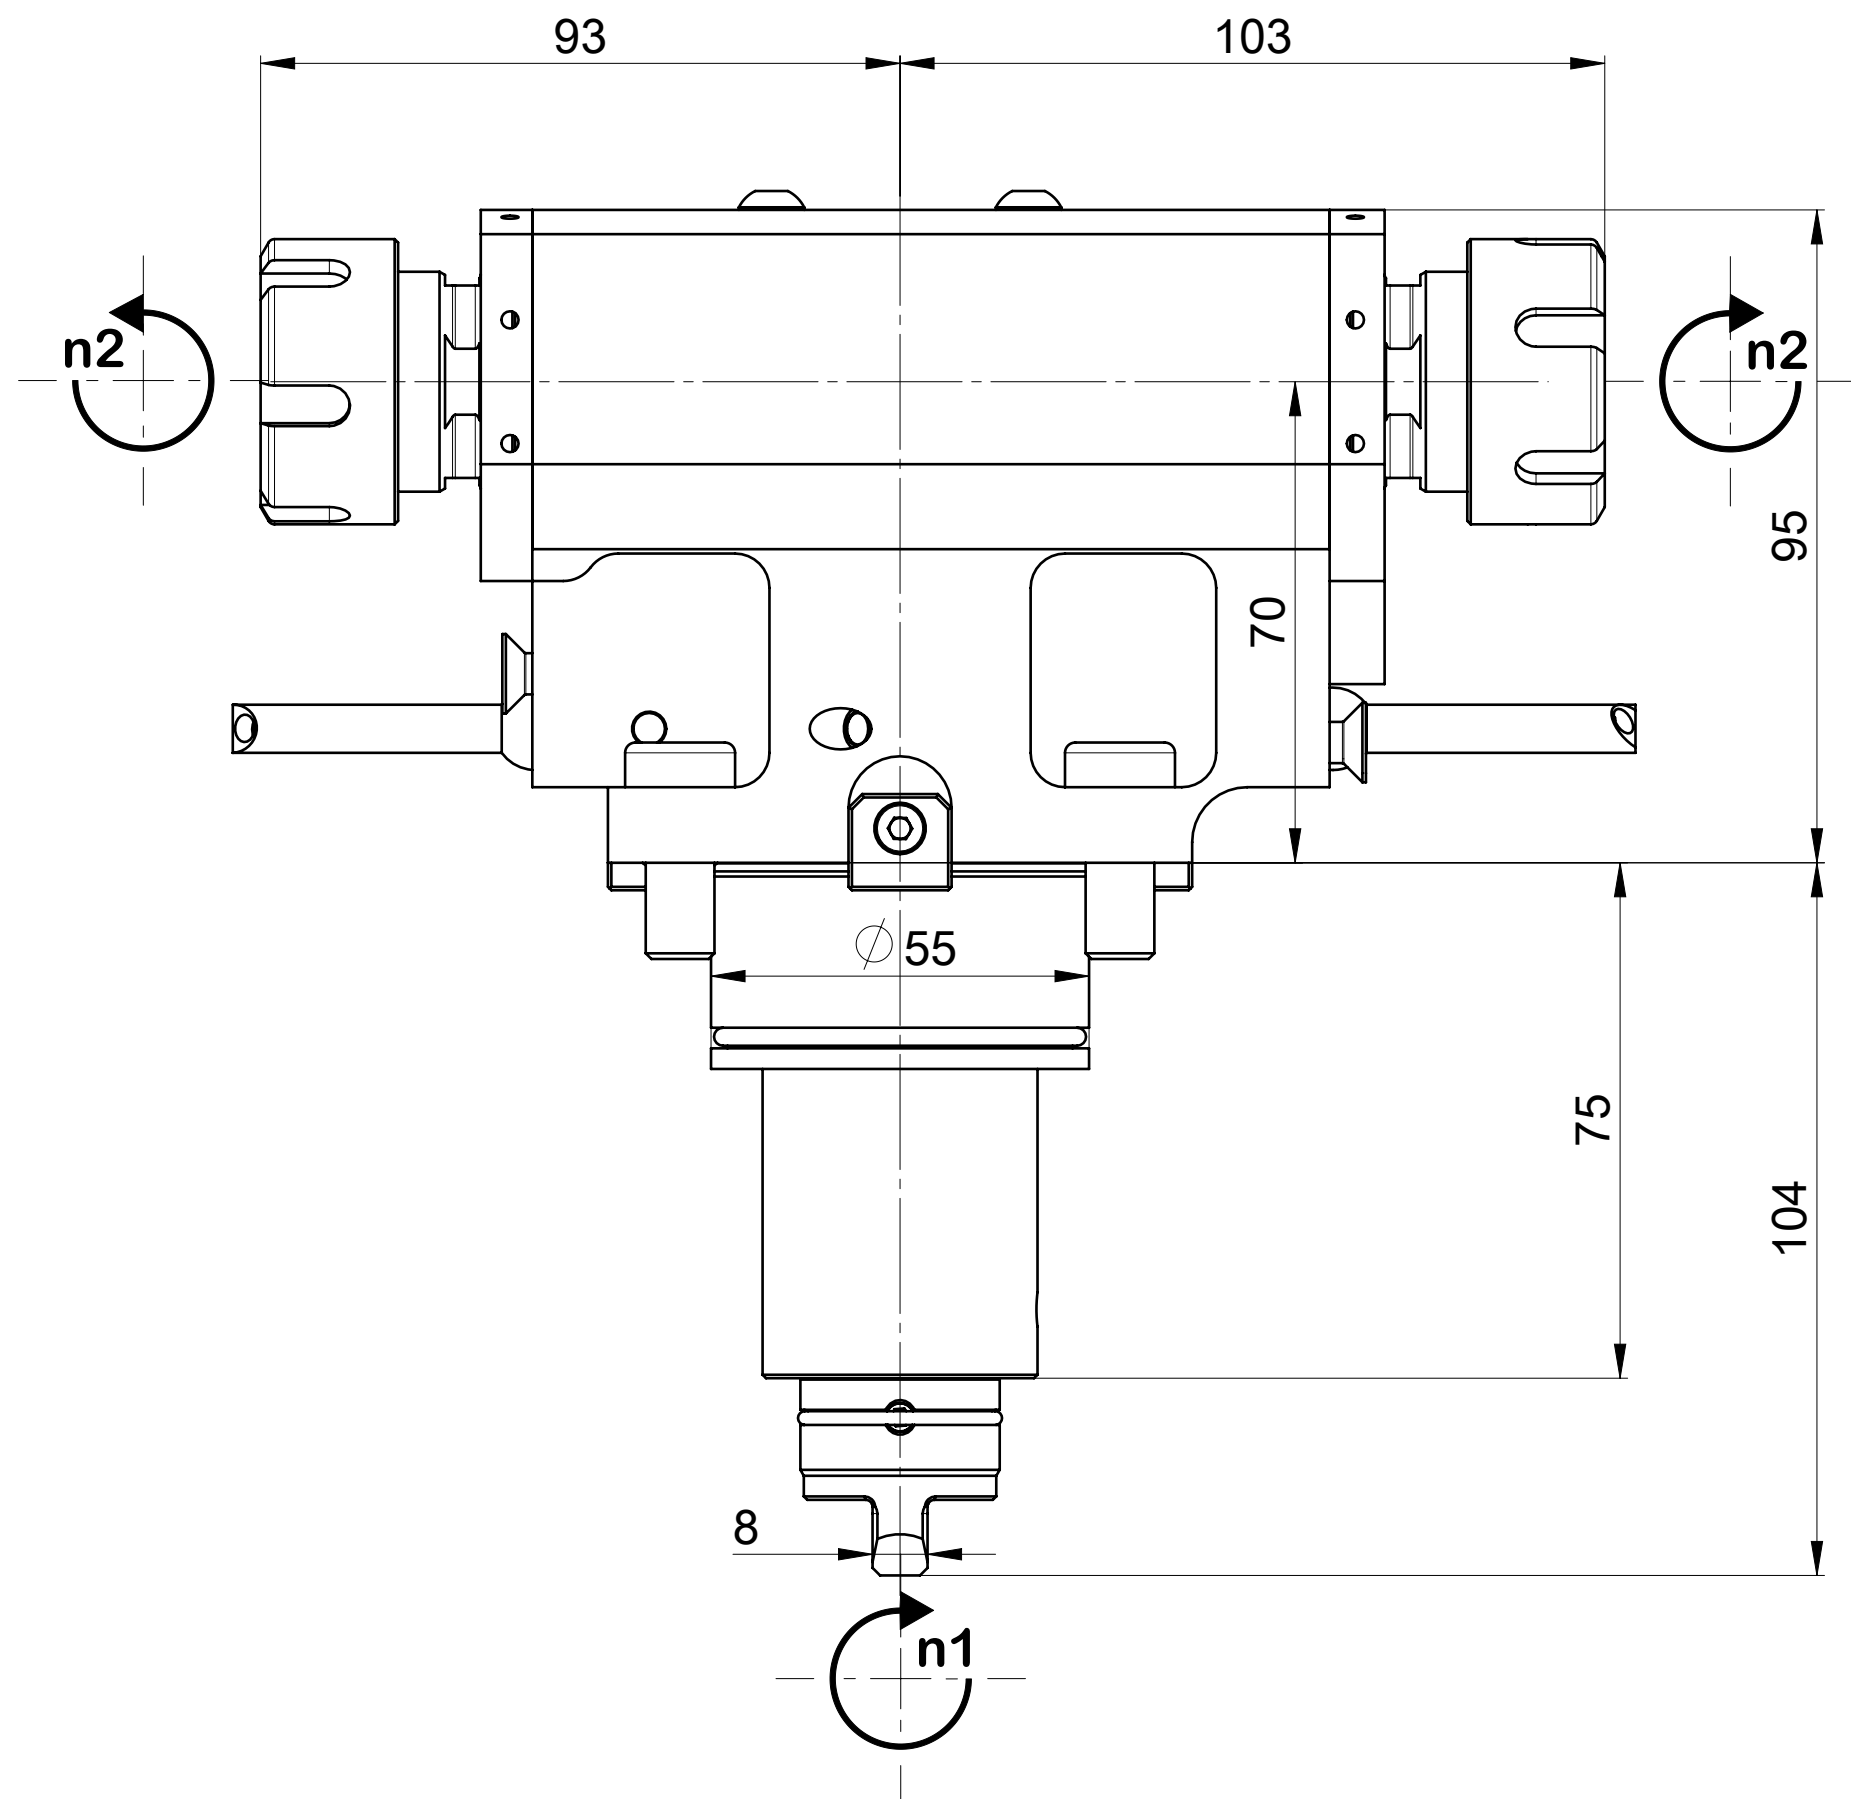





the maximum torque 25Nm
Must be divided equally
on each spindle
that works simultaneously
1:25/2:12.5
3:8/4:6

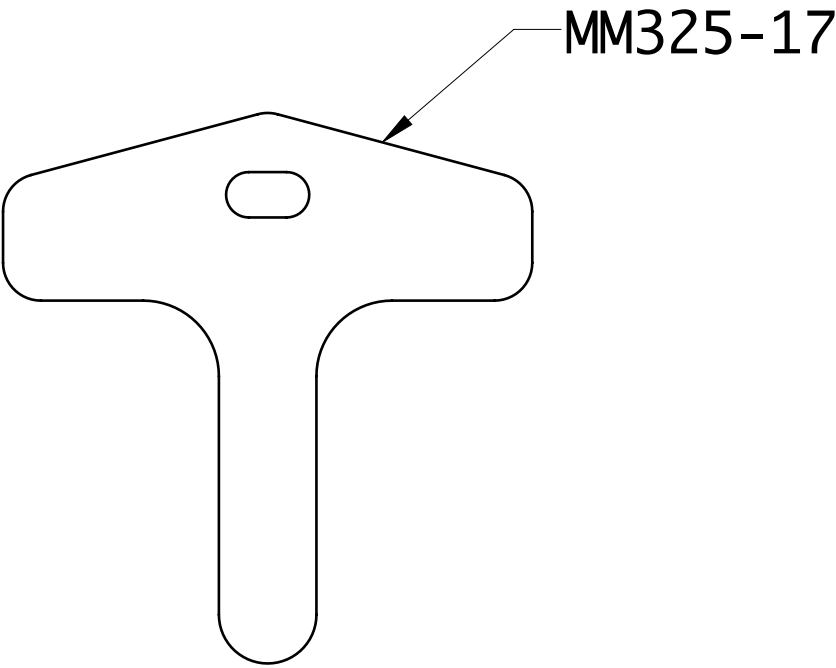

Commercial Code:		RRPPTYH25 321UT55P	
Denomination:		Item Code:	
Driven tool-Radial 90° both side Y axis		AMT531T-HP	
Speed Max (out)	6000rpm	Coolant	EC
Transmission Ratio n1:n2	1:1 U U U	T2. Max	 25 Nm
Pressure Max	bar	Filtration	µm
InPut	BMT55	Output	ER 25
Weight		8.102Kg	
Info:		ALGRA S.p.A. Via Manzoni 41, I-24031 Almenno S.Salvatore (BG) Tel. +39 035642051 Fax +39 035640128 algra.accessori@algra.it	
QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETÀ. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESE SE RICHIESTO THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFÄLTIGT NOCH DRITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN		A2	