

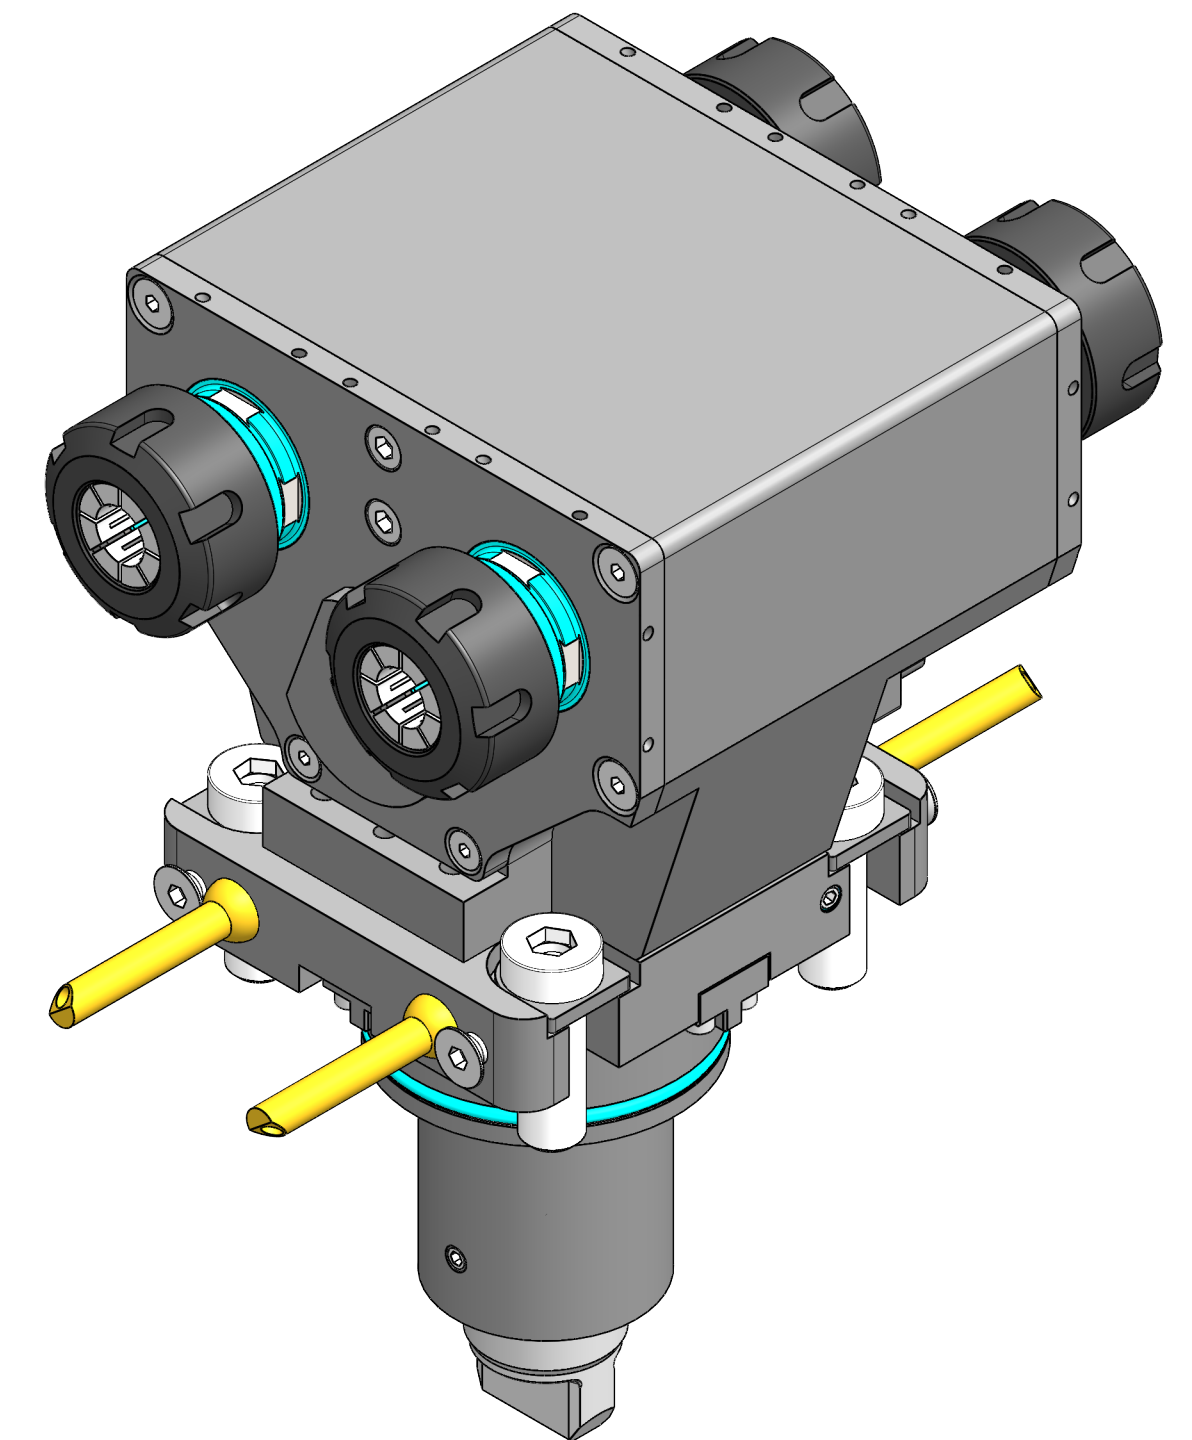
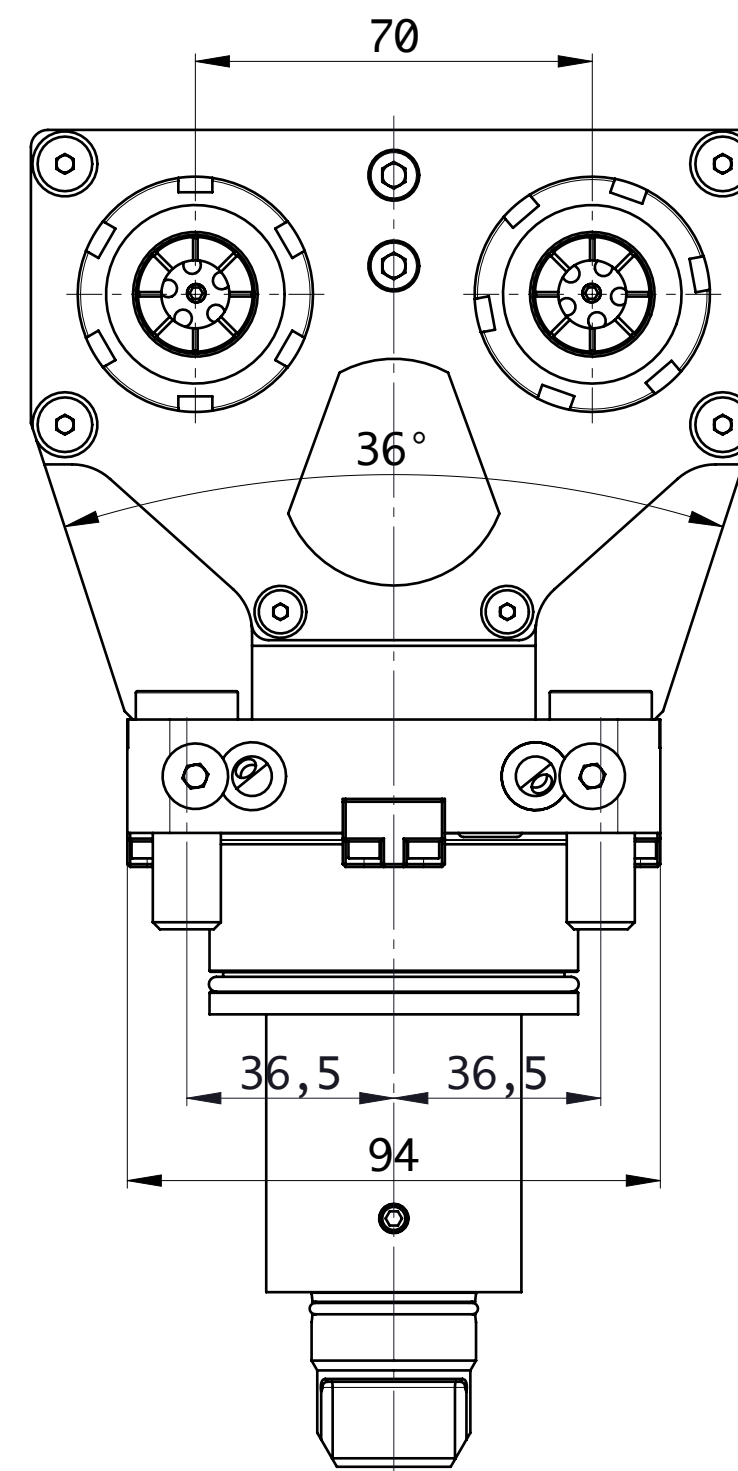
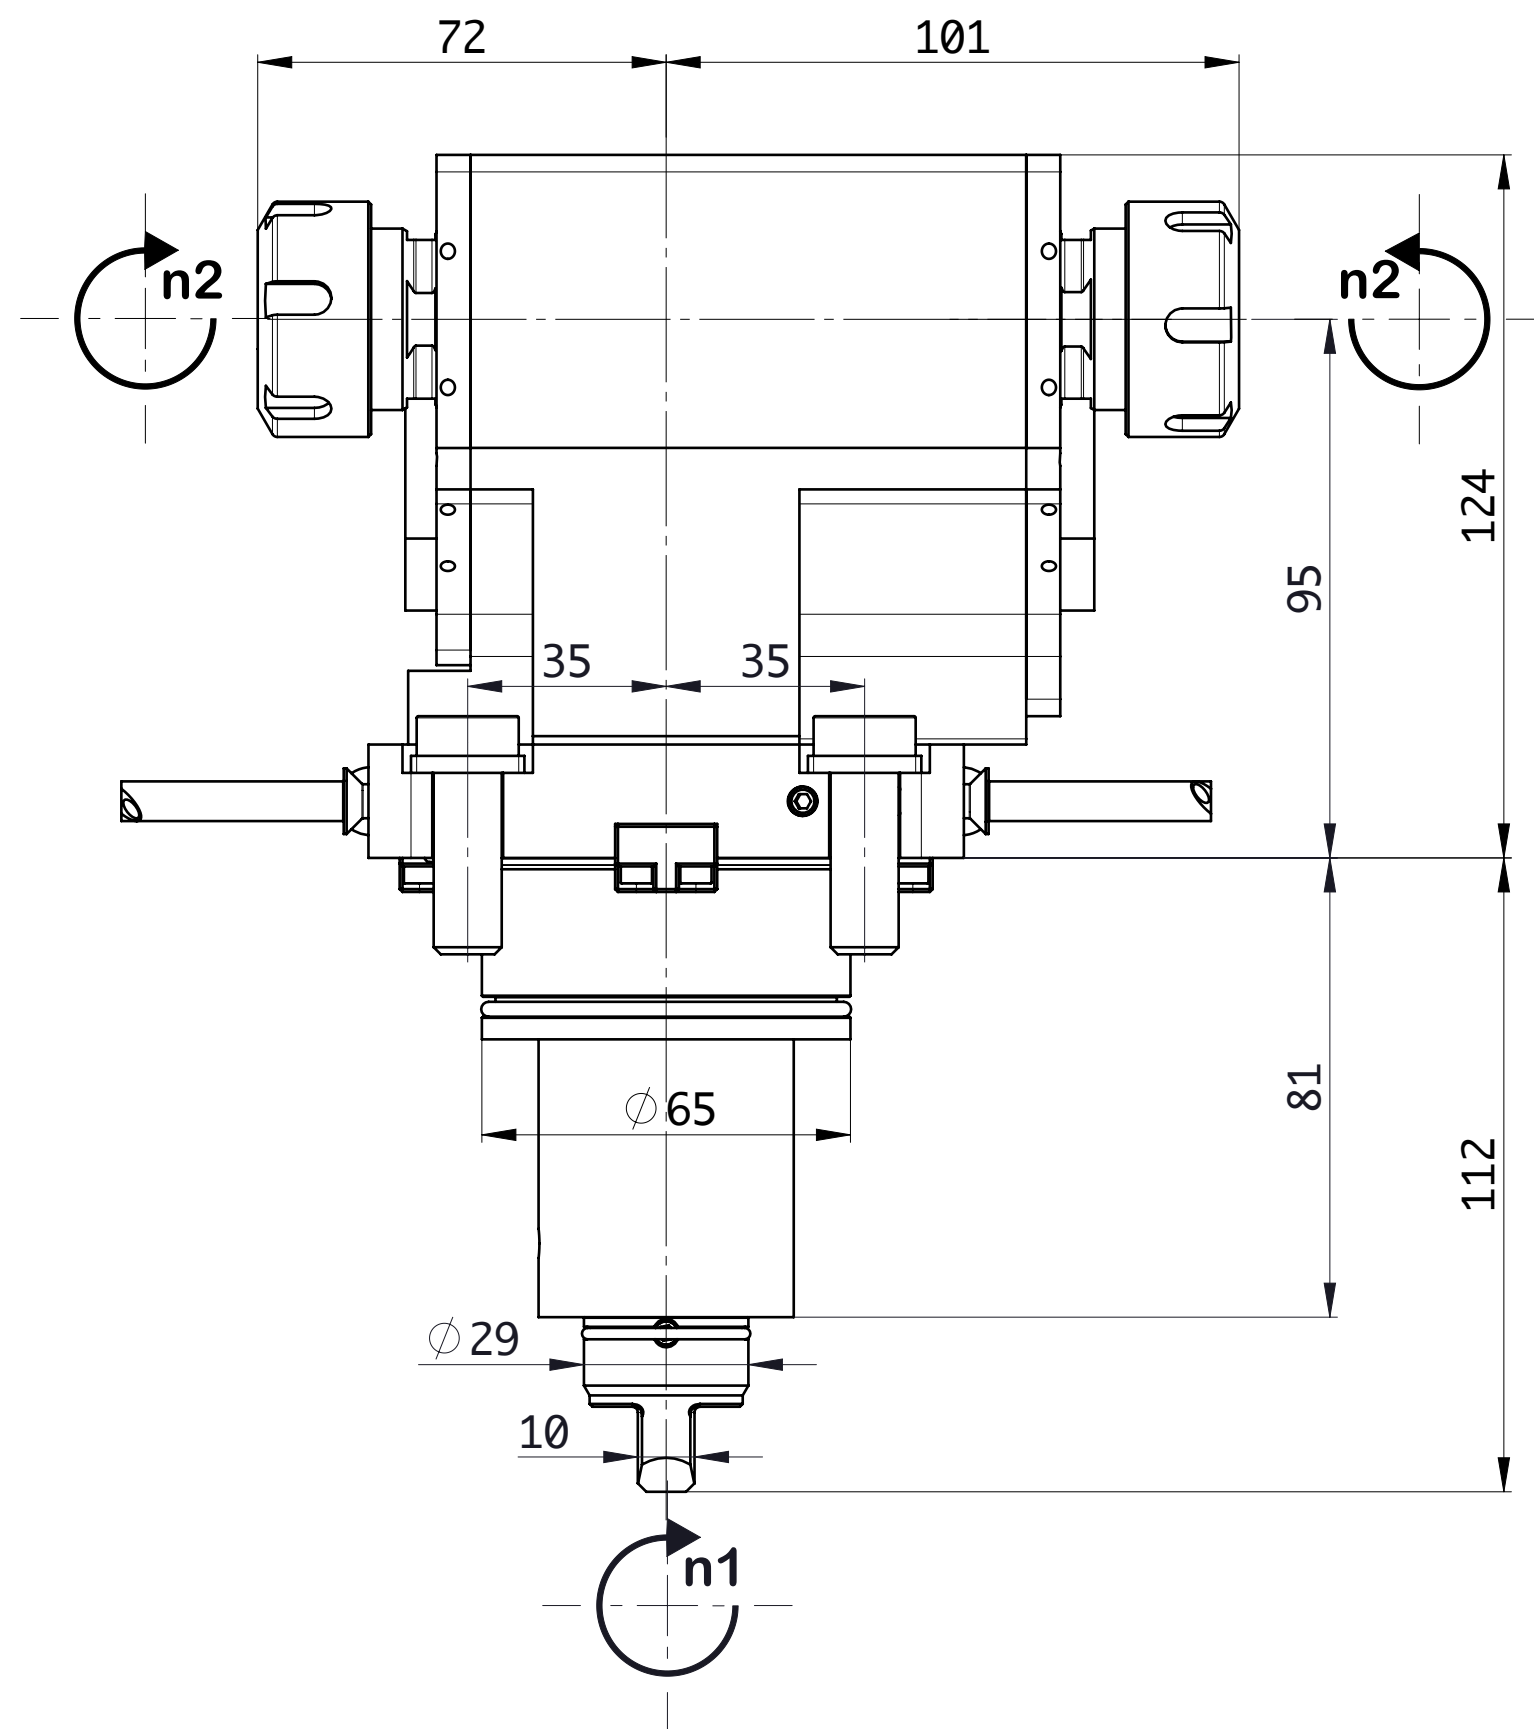


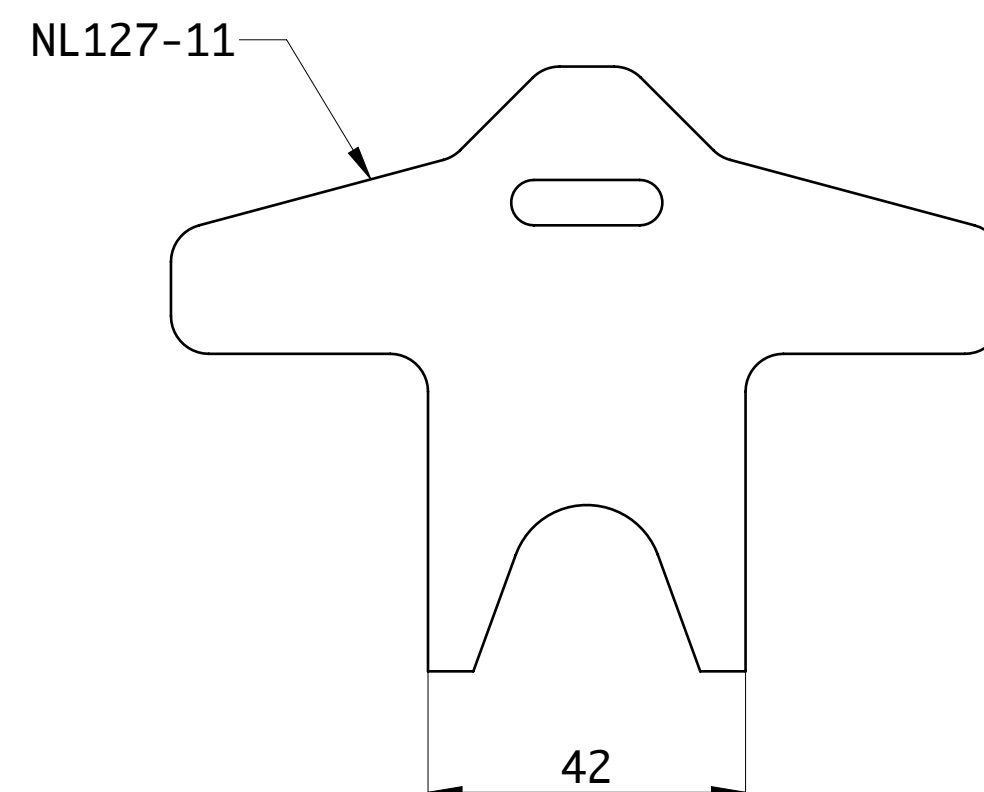

⚠
the maximum torque 40Nm
Must be divided equally
on each spindle
that works simultaneously
1:40/2:20/
3:13/4:10

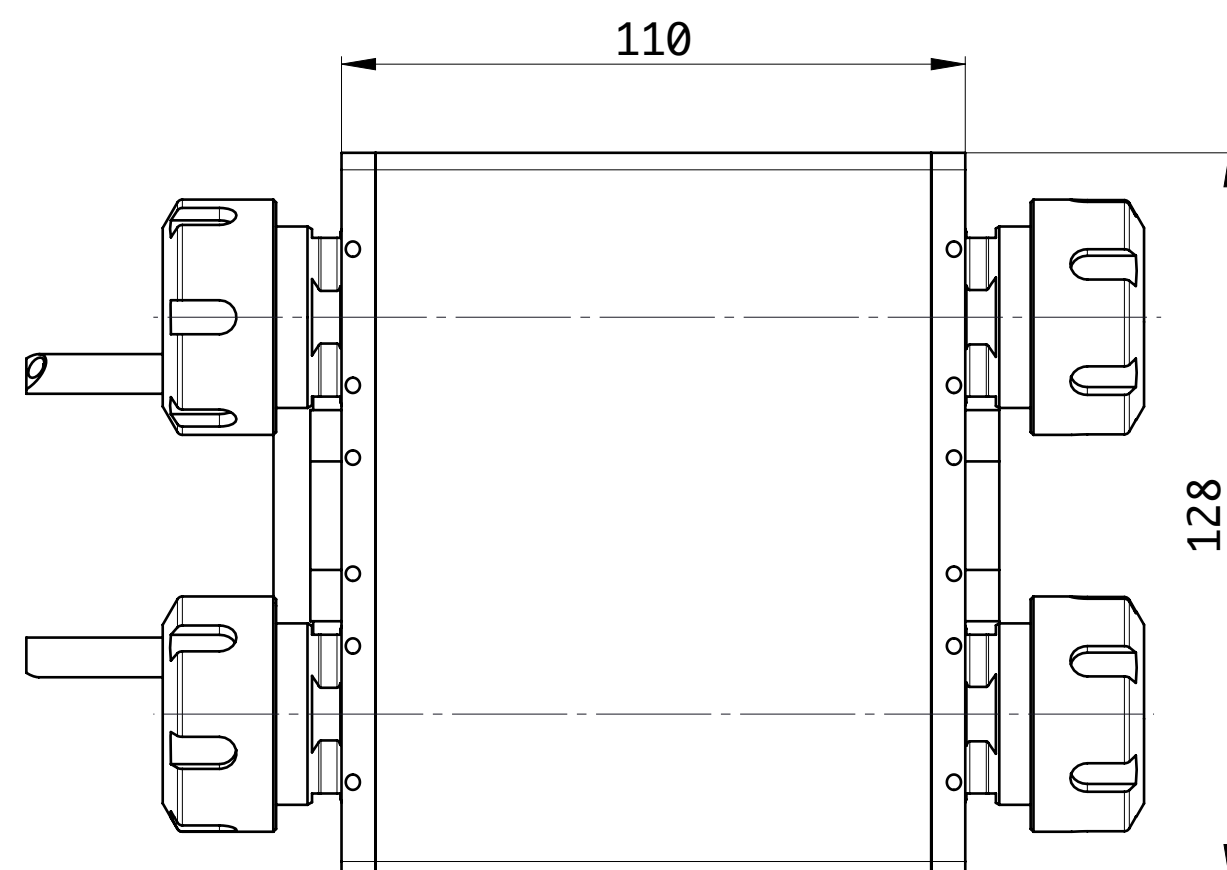

Codice commerciale
Commercial code

RRPPTYH25 321UT65P/70

Denominazione
Denomination

Driven tool-Radial 90° both side Y axis

N° giri Speed max (out) 6000 rpm	Refrigerazione Coolant EC	Rapporto n1:n2 Ratio 1:1	Input BMT65	N° disegno Item code AMT631T-HP
Pressione max Pressure max bar	Filtrazione Filtration µm	Coppia max Max torque T2 40 Nm	Output ER 25	Peso Wheight 11.954 kg

QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETÀ. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESSO SE RICHIESTO
THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST
DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFÄLTIGT NOCH DITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN



Scheda Tecnica
Data Sheet



Website