

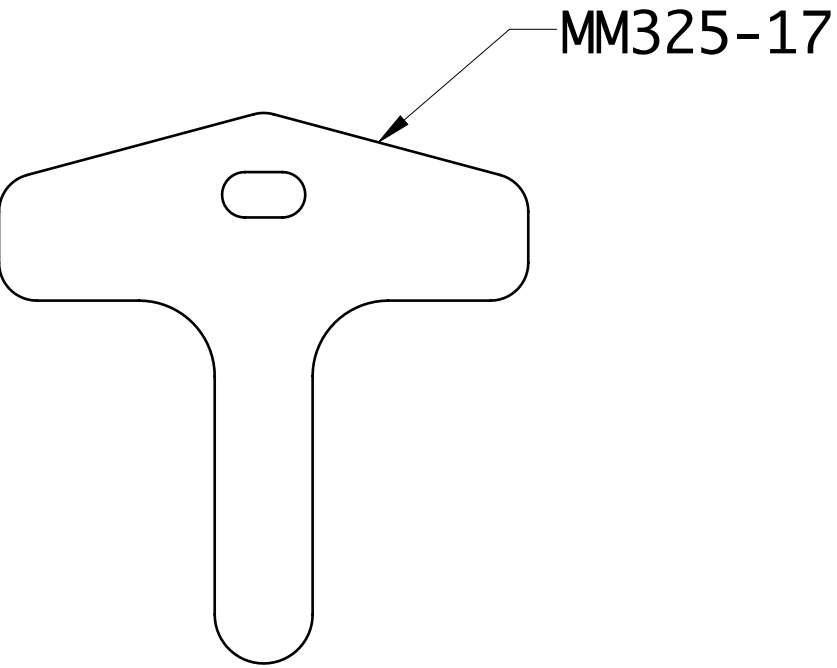
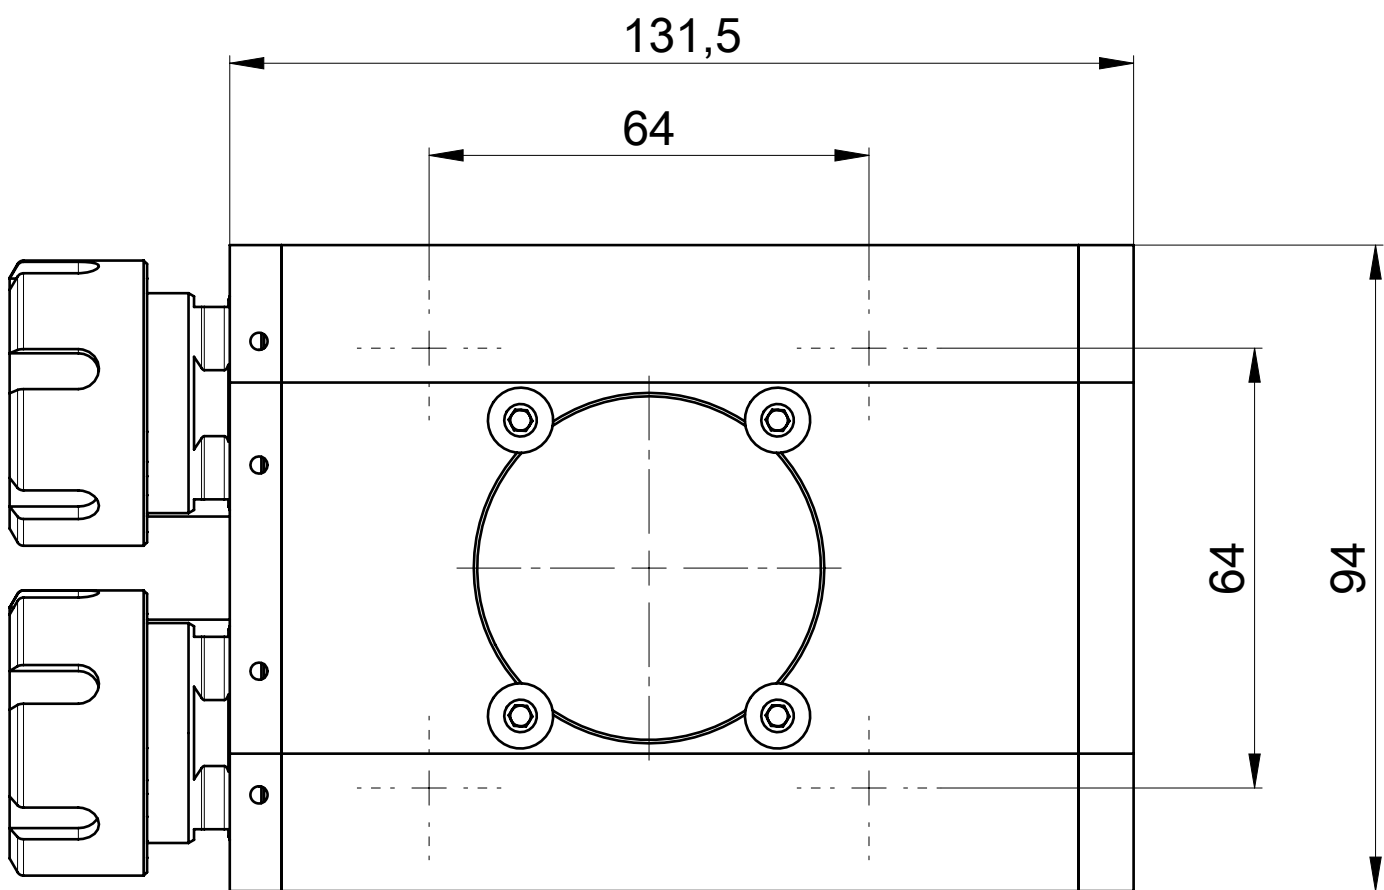
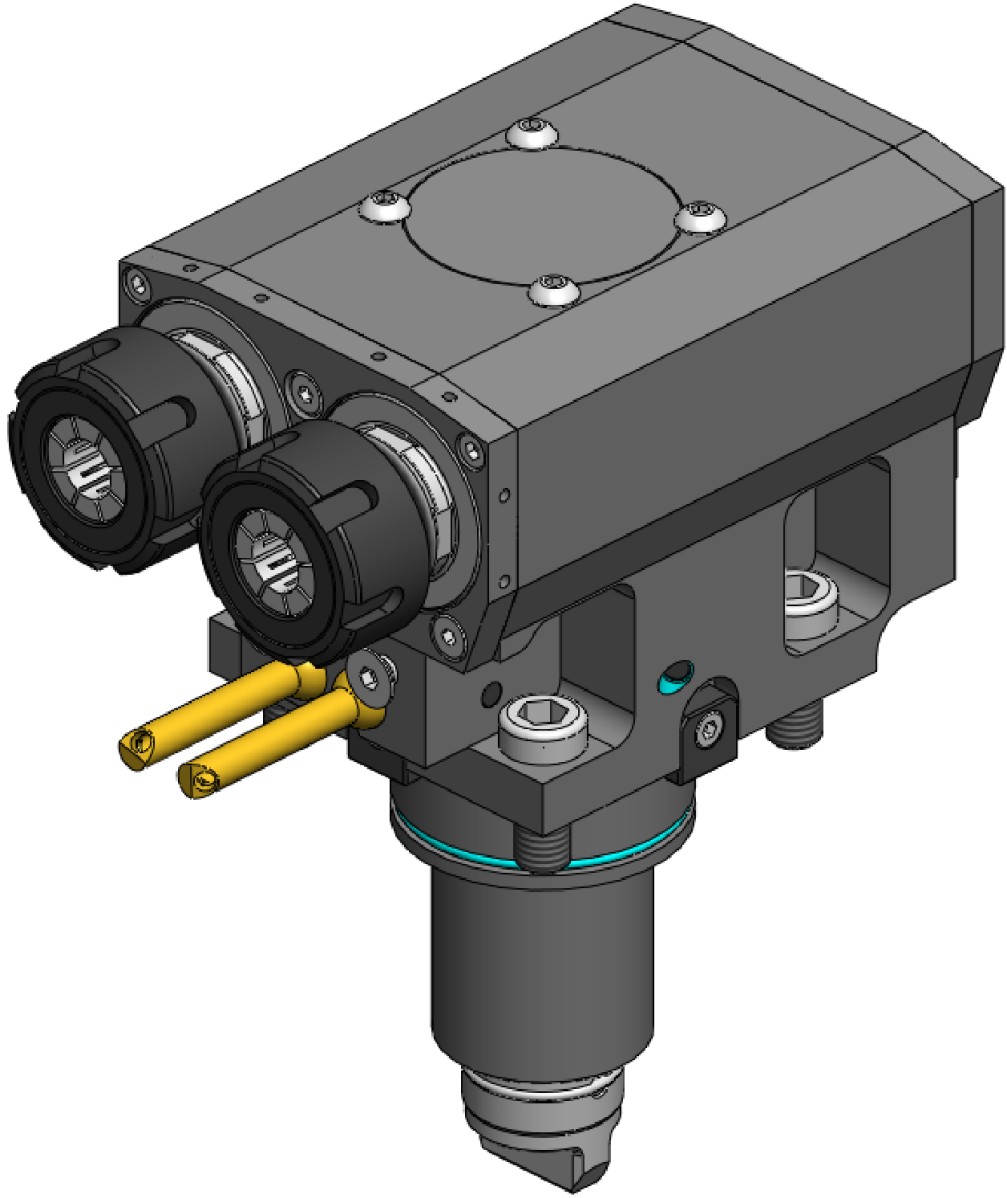


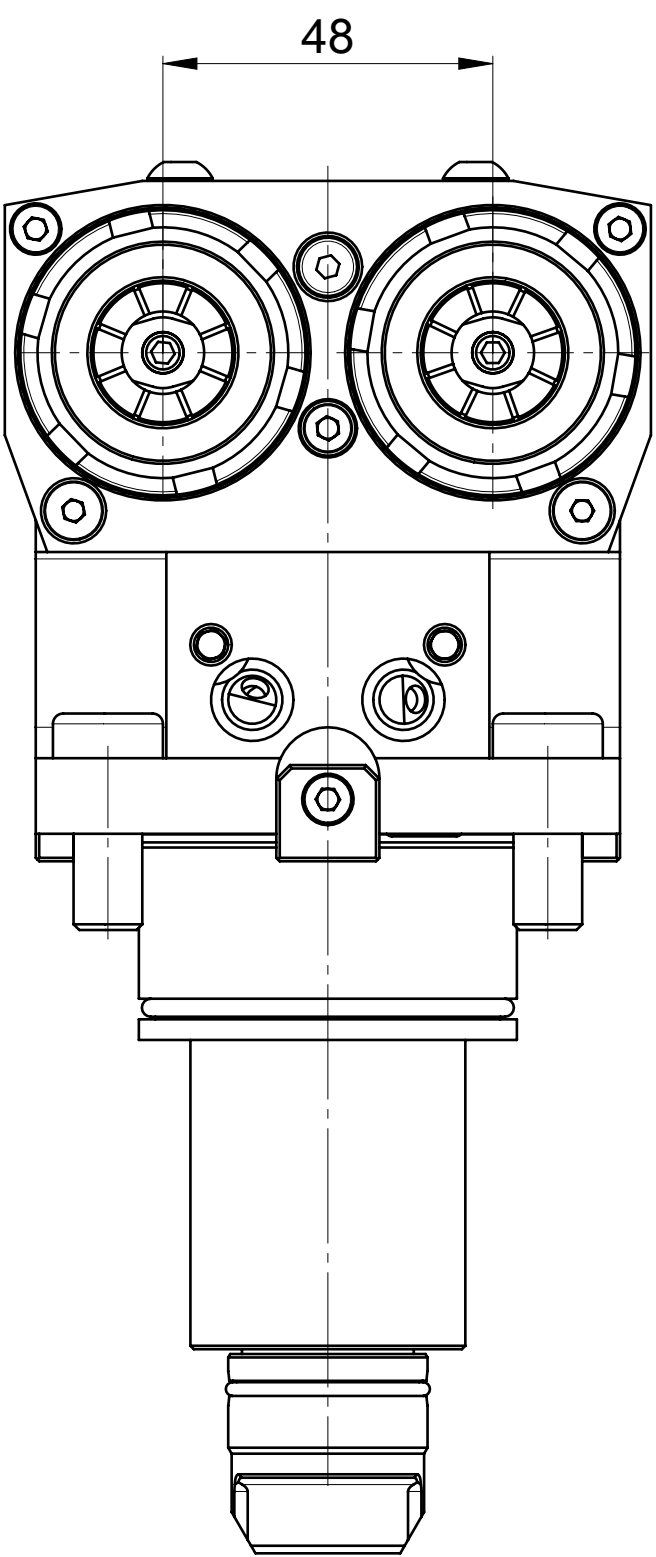


the maximum torque 25Nm
Must be divided equally
on each spindle
that works simultaneously
1:25/2:12.5
3:8/4:6

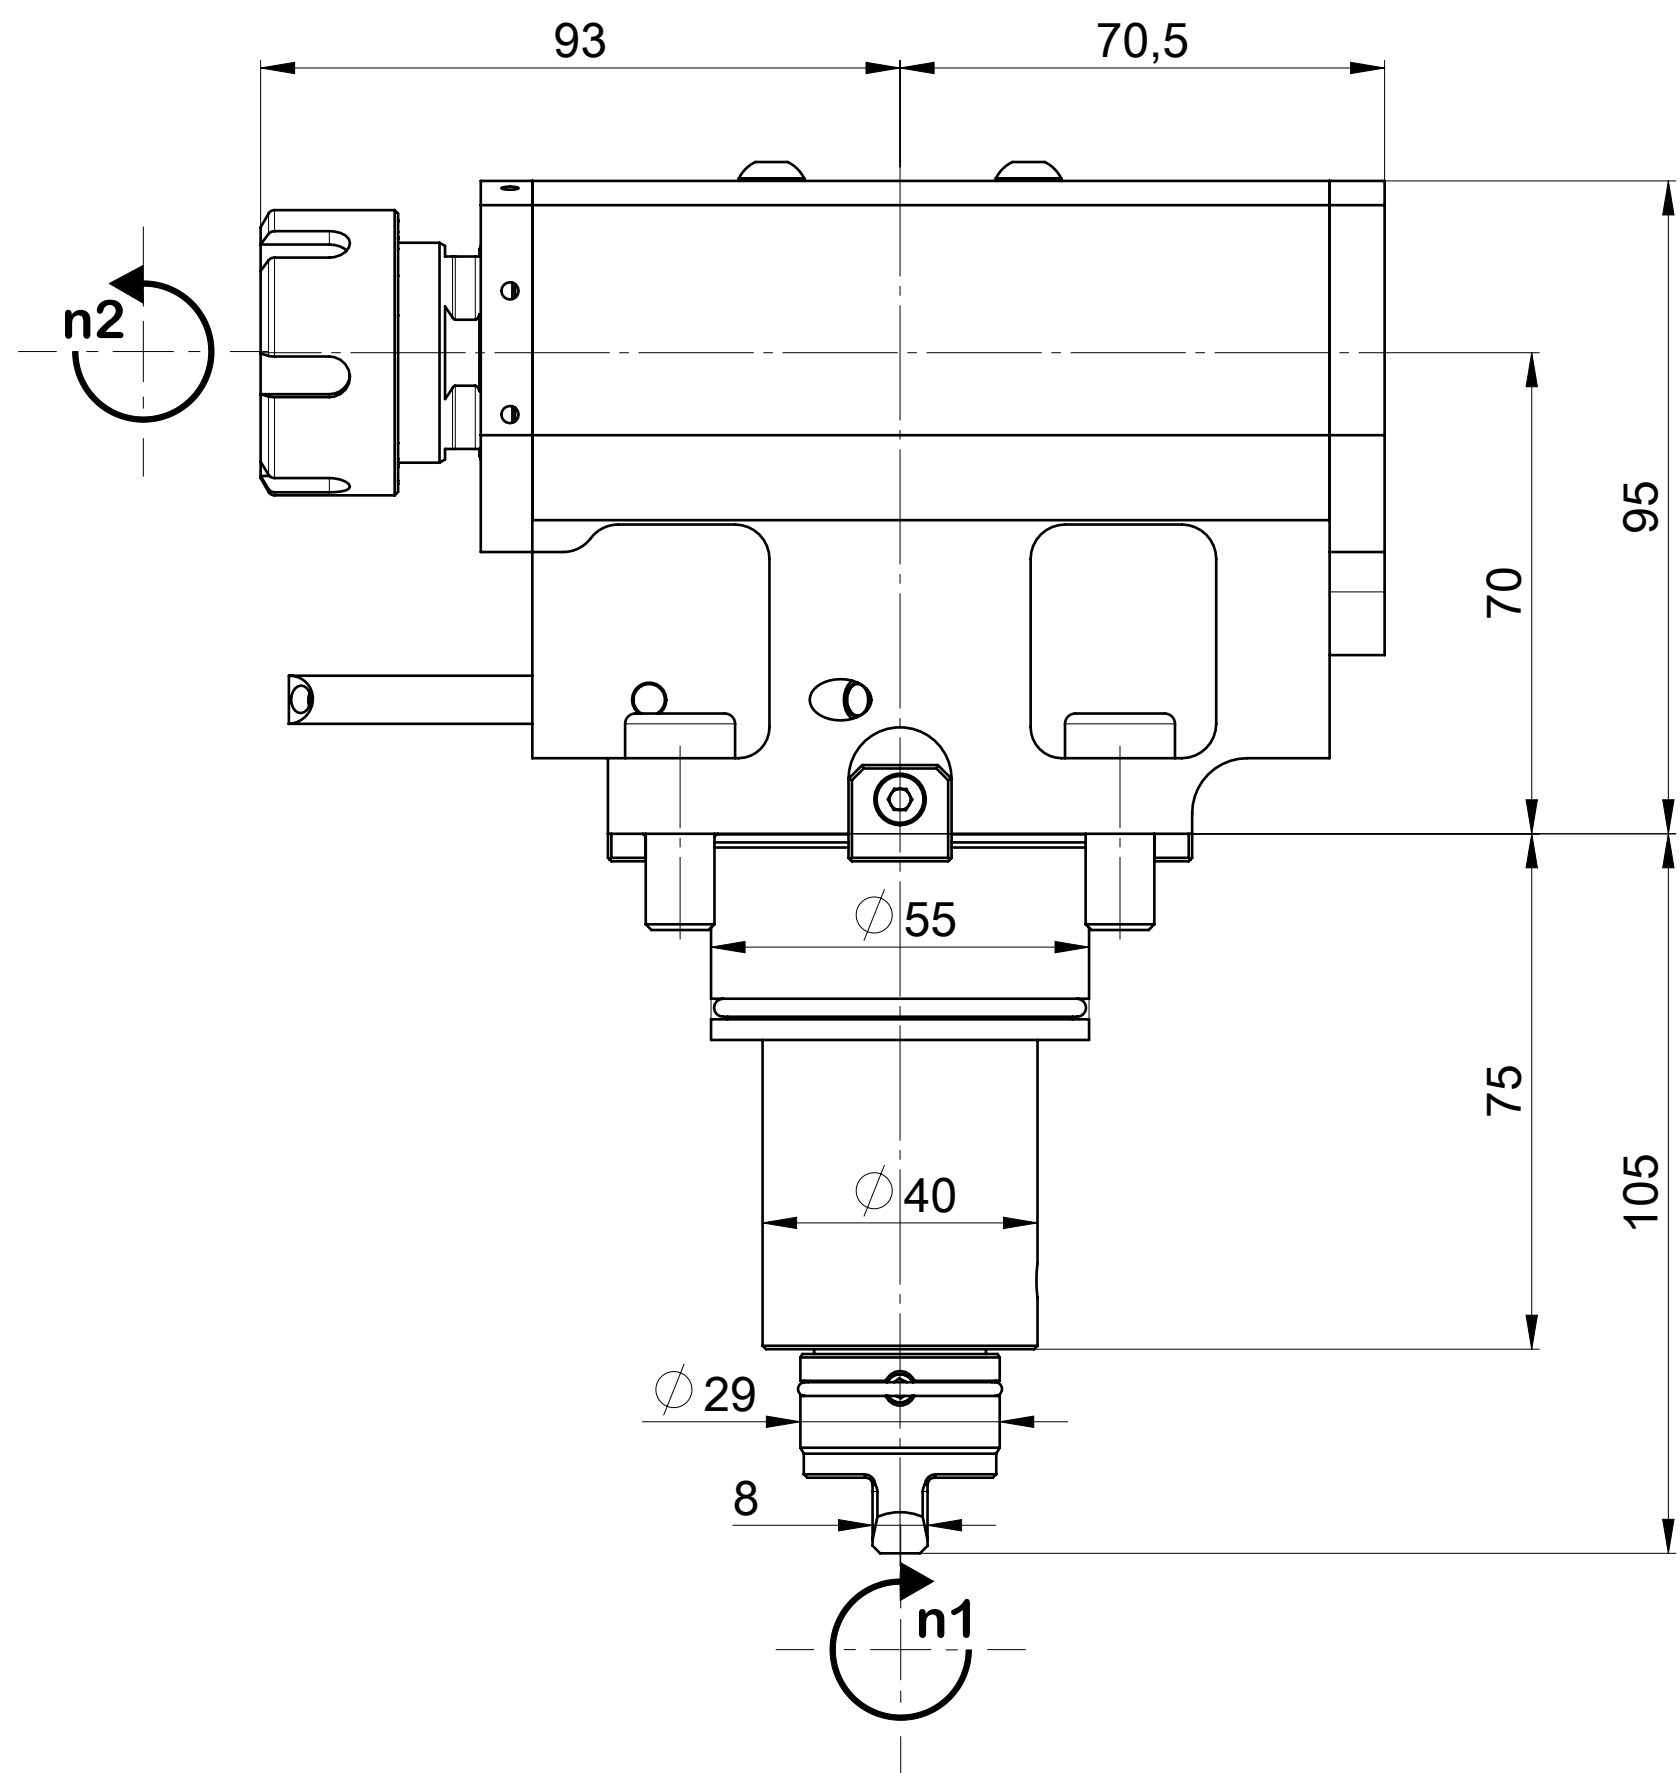

Commercial Code:		RRPPYH25 321UT55P	
Denomination: Driven tool-Radial 90° double Y axis		Item Code: AMT532T-HP	
Speed Max (out) 6000rpm	Coolant EC	Weight 7.688Kg	
Transmission Ratio n1:n2 1:1 ↻ ↻	T2. Max  25 Nm	Info: ALGRA S.p.A. Via Manzoni 41, I-24031 Almenno S.Salvatore (BG) Tel. +39 035642051 Fax +39 035640128 algra.accessori@algra.it	
Pressure Max bar	Filtration µm		
InPut BMT55	Output ER 25		
QUESTO DISEGNO E TUTTE LE INFORMAZIONI CONTENUTE SONO DI NOSTRA PROPRIETÀ. NON PUO' ESSERE DIVULGATO O COPIATO SENZA NOSTRA AUTORIZZAZIONE SCRITTA E DEVE ESSERE RESO SE RICHIESTO THIS DRAWING AND ALL INFORMATION THEREON IS OUR PROPERTY AND MAY BE CONFIDENTIAL. IT MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY US AND IS SUBJECT TO RETURN UPON REQUEST DIESE ZEICHNUNG IST UNSER EIGENTUM UND DARF OHNE UNSERE GENEHMIGUNG WEDER VERVIELFÄLTIGT NOCH DRITTEN PERSONEN, INSBESONDERE KONKURRENZFIRMEN AUSGEHÄNDIGT ODER MITGETEILT WERDEN			
		A2	