

## Connection cable

Other connectors and cables

**CONNECTORS AND CABLES** 





#### Ordering information

Туре	part no.		
Connection cable	2094426		

Other models and accessories → www.sick.com/Other\_connectors\_and\_cables

## C € ĽK

#### Detailed technical data

#### Technical specifications

Connection type head A	Male connector, Micro D-Sub, 15-pin, angled
Connection type head B	Female connector, M12, 8-pin, straight, A-coded
Cable	3 m
Shielding	Shielded
Reference voltage	
	300 V AC


#### Certificates

EU declaration of conformity	J.
UK declaration of conformity	✓

#### Classifications


ECLASS 5.0	19030312
ECLASS 5.1.4	19030312
ECLASS 6.0	27060304
ECLASS 6.2	27060304
ECLASS 7.0	27060304
ECLASS 8.0	27060304
ECLASS 8.1	27060304
ECLASS 9.0	27060304
ECLASS 10.0	27060304
ECLASS 11.0	27060304
ECLASS 12.0	27060304
ETIM 5.0	EC000830
ETIM 6.0	EC000830
ETIM 7.0	EC003249
ETIM 8.0	EC003249
UNSPSC 16.0901	26121604

#### **Dimensional drawing**

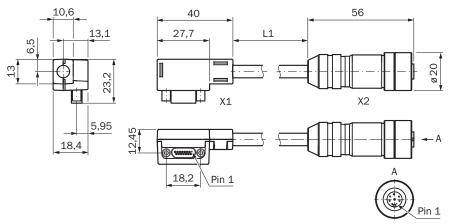


Dimensions in mm (inch)

#### X1: Plug, Micro D-Sub, 15-pin, angled



Х	(1	Х2					
	nector, Mi- b, 15-pin	Female connector M12, 8-pin, A-coded					
FX3-	МОС	Encoder	Sin/cos encoder		ler A/B incremental encoder		der
Pin	Designation	Pin	Sin/Cos	HIPERFACE <sup>®</sup>	2 output pairs (HTL 24 V, HTL 12 V, TTL)	2 outputs (HTL 24 V, HTL 12 V, TTL)	2 output pairs (RS-422)
1	ENC1_A+	2	Cos+	Cos	A+	Α	A+
2	ENC1_B+	4	Sin+	Sin	B+	В	-
3	ENC1_C+	6	Z+	-	-	-	B+
4	ENC1_24V	8	24 V supply voltage				
9	ENC1_A-	1	Cos-	Cos_Ref	Α-	GND	Α-
10	ENC1_B-	3	Sin-	Sin_Ref	B-	GND	-
11	ENC1_C-	5	Z-	-	-	-	B-
12	ENC_OV	7	GND supply voltage				

#### PIN assignment X2 = Connection type of head B = Socket, M12, 8-pin, straight, A-coded



# Connection cable | Other connectors and cables CONNECTORS AND CABLES

>	(1	Х2					
	nector, Mi- ıb, 15-pin		Female connector M12, 8-pin, A-coded				
FX3-MOC		Encoder	Sin/cos encoder		A/E	3 incremental enco	der
Pin	Designation	Pin	Sin/Cos	HIPERFACE <sup>®</sup>	2 output pairs (HTL 24 V, HTL 12 V, TTL)	2 outputs (HTL 24 V, HTL 12 V, TTL)	2 output pairs (RS-422)
1	ENC1_A+	2	Cos+	Cos	A+	Α	A+
2	ENC1_B+	4	Sin+	Sin	B+	В	-
3	ENC1_C+	6	Z+	-	-	-	B+
4	ENC1_24V	8	24 V supply voltage				
9	ENC1_A-	1	Cos-	Cos_Ref	A-	GND	A-
10	ENC1_B-	3	Sin-	Sin_Ref	B-	GND	-
11	ENC1_C-	5	Z-	-	-	-	B-
12	ENC_OV	7	GND supply voltage				

#### SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

### **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

