

# RT-P1625 ZoneControl

**PHOTOELECTRIC SENSORS** 





## Ordering information

Туре	part no.
RT-P1625	1063149

Other models and accessories → www.sick.com/ZoneControl

Illustration may differ



### Detailed technical data

### **Features**

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression
Dimensions (W x H x D)	20.6 mm x 99.2 mm x 48.9 mm
Sensing range max.	60 mm 900 mm
Sensing range	60 mm 900 mm
Focus	7°
Type of light	Infrared light
Light source	LED <sup>1)</sup>
Light spot size (distance)	Ø 20 mm (500 mm)
Angle of dispersion	7°
Adjustment	Potentiometer, 9 turns
Special applications	ZoneControl

 $<sup>^{1)}</sup>$  Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

## Mechanics/electronics

Supply voltage U <sub>B</sub>	10 V DC 30 V DC <sup>1)</sup>
Ripple	< 5 V <sub>pp</sub> <sup>2)</sup>
Current consumption	20 mA <sup>3)</sup>
Switching output	PNP

<sup>&</sup>lt;sup>1)</sup> Limit values

 $<sup>^{2)}\,\</sup>mbox{May}$  not fall below or exceed  $\mbox{U}_{\mbox{\sc V}}$  tolerances.

 $<sup>^{</sup>m 3)}$  Without load and valve deenergized.

 $<sup>^{4)}</sup>$  Do not bend below 0 °C.

 $<sup>^{5)}</sup>$  A = V<sub>S</sub> connections reverse-polarity protected.

<sup>&</sup>lt;sup>6)</sup> C = interference suppression.

 $<sup>^{7)}</sup>$  D = outputs overcurrent and short-circuit protected.

Switching mode	Light switching
Signal voltage PNP HIGH/LOW	Approx. V <sub>S</sub> - 0.5 V / 0 V
Output current I <sub>max.</sub>	≤ 100 mA
Response time	2 ms
Switching frequency	250 Hz
Connection type	Cable with WAGO terminal, 1 m <sup>4)</sup>
Circuit protection	A <sup>5)</sup> C <sup>6)</sup> D <sup>7)</sup>
Protection class	III
Weight	175 g
Housing material	Plastic, ABS
Enclosure rating	IP67
Shock and vibration resistance	According to IEC 68
Ambient operating temperature	-40 °C +60 °C
Ambient temperature, storage	-40 °C +75 °C
UL File No.	NRKH.E189383 & NRKH7.E189383

<sup>1)</sup> Limit values.

## Safety-related parameters

MTTF <sub>D</sub>	1,525 years
DC <sub>avg</sub>	0 %

### Certificates

EU declaration of conformity	✓
China RoHS	✓

### Classifications

ECLASS 5.0	27270904
ECLASS 5.1.4	27270904
ECLASS 6.0	27270904
ECLASS 6.2	27270904
ECLASS 7.0	27270904
ECLASS 8.0	27270904
ECLASS 8.1	27270904
ECLASS 9.0	27270904
ECLASS 10.0	27270904
ECLASS 11.0	27270904
ECLASS 12.0	27270903

 $<sup>^{2)}\,\</sup>mbox{May}$  not fall below or exceed  $\mbox{U}_{\mbox{\scriptsize V}}$  tolerances.

 $<sup>^{</sup>m 3)}$  Without load and valve deenergized.

<sup>&</sup>lt;sup>4)</sup> Do not bend below 0 °C.

 $<sup>^{5)}</sup>$  A = V<sub>S</sub> connections reverse-polarity protected.

 $<sup>^{6)}</sup>$  C = interference suppression.


<sup>&</sup>lt;sup>7)</sup> D = outputs overcurrent and short-circuit protected.

# RT-P1625 | ZoneControl


## PHOTOELECTRIC SENSORS

ETIM 5.0	EC002719
ETIM 6.0	EC002719
ETIM 7.0	EC002719
ETIM 8.0	EC002719
UNSPSC 16.0901	39121528

### Characteristic curve

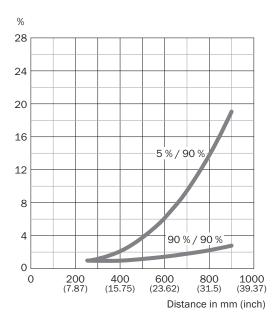



## Light spot size




Distance in mm (inch)

## Dimensional drawing R cable



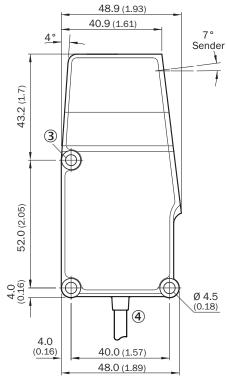

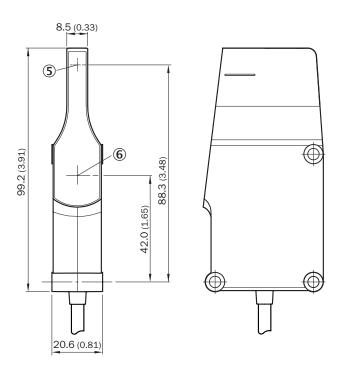

Dimensions in mm (inch)

- ① LED
- ② Potentiometer
- 3 fixing hole
- 4 cable
- ⑤ Center of optical axis, sender
- ® Center of optical axis, receiver

## PHOTOELECTRIC SENSORS

### Recommended accessories

Other models and accessories → www.sick.com/ZoneControl

	Brief description	Туре	part no.	
Mounting syst	Mounting systems			
	<ul> <li>Description: Mounting bracket</li> <li>Material: Steel</li> <li>Details: Steel, zinc coated</li> <li>Items supplied: Mounting hardware included</li> </ul>	BEF-WN-RT/IRT	2074621	
0 0	Description: Mounting bracket     Material: Steel     Details: Steel, zinc coated     Items supplied: Mounting hardware included     Usable for: WTR/WLR, IRT	BEF-WK-WTR	2051786	

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

