

# MICS3-CBAZ90IZ1P01

microScan3

**SAFETY LASER SCANNERS** 





## Ordering information

Туре	part no.
MICS3-CBAZ90IZ1P01	1094461

Other models and accessories → www.sick.com/microScan3

Illustration may differ



#### Detailed technical data

#### Features

Product version	microScan3 Pro - EtherNet/IP
Model	Sensor including system plug (pre-mounted on the underside)
Application	Indoor
Protective field range	9 m
Warning field range	64 m
Collision protection field range	19 m (on reference target)
Number of simultaneously monitored fields	≤ 4 <sup>1)</sup>
Number of fields	128
Number of monitoring cases	128
Scanning angle	275°
Resolution (can be configured)	30 mm 40 mm 50 mm 60 mm 70 mm 150 mm 200 mm
Angular resolution	0.1°
Response time	115 ms
Protective field supplement	100 mm

 $<sup>^{1)}</sup>$  Protection, warning or contour detection fields.

# Safety-related parameters

Туре	Type 3 (IEC 61496)
------	--------------------

Safety integrity level	SIL 2 (IEC 61508)
Category	Category 3 (EN ISO 13849)
Performance level	PL d (EN ISO 13849)
$\ensuremath{PFH_D}$ (mean probability of a dangerous failure per hour)	8.0 x 10 <sup>-8</sup>
T <sub>M</sub> (mission time)	20 years (EN ISO 13849)
Safe state in the event of a fault	The safety outputs via the network are logic 0.

# **Functions**

Restart interlock	✓
Multiple sampling	✓
Monitoring case switching	✓
Simultaneous monitoring	✓
Static protective field switching	✓
Collision protection field	✓
Safe contour detection	✓
Contour as a reference	✓
Integrated configuration memory	✓
Measured data output	Via Ethernet

#### Interfaces

Connection type	
Voltage supply	1 x male connector, M12, 4-pin, A-coded
Fieldbus, industrial network	2 x M12 female connectors, 4-pin, D-coded
Outputs	
OSSD pairs	0
Safety outputs via network	4
Configuration method	PC with Safety Designer (Configuration and Diagnostic Software)
Configuration and diagnostics interface	USB 2.0, Mini-USB, Ethernet
Data interface	
Services	EtherNet/IP™ CIP Safety™
	CoLa 2 (configuration and diagnostics using Safety Designer)
	Data output
	DHCP
	SNMP
	SNTP (client and server)
Fieldbus, industrial network	EtherNet/IP™
Supported protocol versions	Common Industrial Protocol: The CIP Networks Library Volume 1, Edition 3.20
	EtherNet/IP™: The CIP Networks Library Volume 2, Edition 1.21
	CIP Safety™: The CIP Networks Library Volume 5, Edition 2.13
Topology support	DLR (Device Level Ring)
Display elements	Graphic color display, LEDs

# MICS3-CBAZ90IZ1P01 | microScan3

SAFETY LASER SCANNERS

#### Electronics

Protection class	III (EN 61140)
Supply voltage $V_{\rm s}$	24 V DC (16.8 V DC 30 V DC)
Power consumption typical	7.2 W

#### Mechanics

Dimensions (W x H x D)	112 mm x 150.7 mm x 111.1 mm (without system plug)
Weight	1.45 kg
Housing material	Aluminum
Housing color	RAL 1021 (yellow), RAL 9005 (black)
Optics cover material	Polycarbonate
Optics cover surface finish	Outside with scratch-resistant coating

#### Ambient data

Enclosure rating	IP65 (IEC 60529)
Ambient light immunity	≤ 40 klx (IEC 61496-3) <sup>1)</sup>
Ambient operating temperature	-10 °C +50 °C
Storage temperature	-25 °C +70 °C
Vibration resistance	IEC 60068-2-6, IEC 60068-2-64, IEC 60721-3-5, IEC TR 60721-4-3, IEC 61496-1, IEC 61496-3
Class	5M1 (IEC 60721-3-5)
	3M4 (IEC TR 60721-4-3)
Shock resistance	IEC 60068-2-27, IEC 60721-3-5, IEC TR 60721-4-3, IEC 61496-1, IEC 61496-3
Class	5M1 (IEC 60721-3-5)
	3M4 (IEC TR 60721-4-3)
Continuous shock	100 m/s², 16 ms
	150 m/s², 6 ms
EMC	IEC 61496-1, IEC 61000-6-2, IEC 61000-6-4

 $<sup>^{(1)}</sup>$  Typical ambient light immunity, for ambient light sources directly in the scan plane in accordance with IEC 61496-3:  $\leq$  3 klx.

#### Other information

Type of light	Pulsed laser diode
Wave length	845 nm
Detectable remission factor	1.8% to several 1000%
Laser class	1 (21 CFR 1040.10 and 1040.11, IEC 60825-1)

#### Certificates


EU declaration of conformity	1
UK declaration of conformity	1
ACMA declaration of conformity	1
China RoHS	1
cULus certificate	1
S Mark certificate	1
Ethernet/IP certificate	1


EC-Type-Examination approval	✓
China GB certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	<b>✓</b>


#### Classifications

ECLASS 5.0	27272705
ECLASS 5.1.4	27272705
ECLASS 6.0	27272705
ECLASS 6.2	27272705
ECLASS 7.0	27272705
ECLASS 8.0	27272705
ECLASS 8.1	27272705
ECLASS 9.0	27272705
ECLASS 10.0	27272705
ECLASS 11.0	27272705
ECLASS 12.0	27272705
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550
UNSPSC 16.0901	39121528

## Dimensional drawing



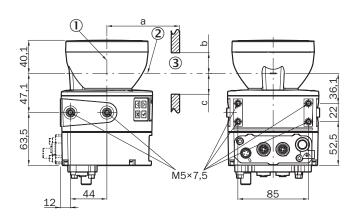






# MICS3-CBAZ90IZ1P01 | microScan3

SAFETY LASER SCANNERS

Dimensions in mm (inch)

- ① mirror axis of rotation
- 2 scan plane
- ③ required viewing slit (a: length of the viewing slit, b: minimum height above the scan plane, c: minimum height below the scan plane. See the operating instructions for details.)

## Pinouts Ethernet (XF1, XF2)



Pin	Designation	Description
1	TX+	Send data +
2	RX+	Receive data +
3	TX-	Send data -
4	RX-	Receive data -
Thread	SH	Shielding
For details see operating instructions		

## Pinouts Voltage supply (XD1)



Pin	Designation	Description
1	+24 V DC	Supply voltage +24 V DC
2	n.c.	Not connected
3	0 V DC	Supply voltage 0 V DC
4	FE	Functional earth/shielding
For details see operating instructions		

#### Recommended accessories

Other models and accessories → www.sick.com/microScan3

	Brief description	Туре	part no.	
Mounting syst	Mounting systems			
TT.	Description: Mounting bracket, heavy-duty version, with protection cover, for floor mounting, height adjustment possible from 90 310 mm, scanner tilt angle: ± 5°. Additional mounting brackets are not required.      Dimensions (W x H x L): 200 mm x 366 mm x 269 mm      Material: Steel     Details: Steel, painted (RAL 1021)      Color: RAL 1021 (yellow)      Packing unit: 1 piece	Heavy-duty mounting kit for floor mounting	2102289	
R	<ul> <li>Description: Mounting bracket with protection of optics hood</li> <li>Material: Stainless steel</li> <li>Details: Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A</li> <li>Color: RAL 9005 (black)</li> <li>Packing unit: 1 piece</li> </ul>	1b mounting kit	2074242	
	Description: Mounting bracket     Material: Stainless steel     Details: Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A     Color: RAL 9005 (black)     Packing unit: 1 piece	Mounting kit 1a	2073851	
	Description: Alignment bracket, alignment with cross-wise axis and depth axis possible, distance between mounting surface and device: 22.3 mm, only in conjunction with mounting kit 1a (2073851) or 1b (2074242)     Material: Stainless steel     Details: Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A     Color: RAL 9005 (black)     Packing unit: 1 piece	Mounting kit 2a	2073852	
	Description: Mounting bracket 150 mm for floor mounting of microScan3     Material: Stainless steel     Details: Stainless steel     Color: Uncoated     Packing unit: 1 piece     Items supplied: Bracket and 4 x M5 screws for attaching the microScan3	Mounting brack- et 150 mm for floor mounting of microScan3	2112950	
	<ul> <li>Description: Mounting bracket 300 mm for floor mounting of microScan3</li> <li>Material: Stainless steel</li> <li>Details: Stainless steel</li> <li>Color: Uncoated</li> <li>Packing unit: 1 piece</li> <li>Items supplied: Bracket and 4 x M5 screws for attaching the microScan3</li> </ul>	Mounting brack- et 300 mm for floor mounting of microScan3	2112951	
	Description: Alignment bracket, alignment with cross-wise axis and depth axis possible, distance between mounting surface and device: 52.3 mm, only in conjunction with mounting kit 1a (2073851) or 1b (2074242)     Material: Stainless steel     Details: Stainless steel V2A (1.4301), powder-coated IGP-DURA face 5803A     Color: RAL 9005 (black)     Packing unit: 1 piece	Mounting kit 2b	2074184	

	Brief description	Туре	part no.
connectors an	nd cables		
	<ul> <li>Connection type head A: Male connector, M12, 4-pin, straight, D-coded</li> <li>Connection type head B: Male connector, RJ45, 8-pin, straight</li> <li>Signal type: Ethernet</li> <li>Cable: 20 m, 4-wire, CAT5, CAT5e, PUR, halogen-free</li> <li>Description: Ethernet, shielded</li> </ul>	SSL-2J04-G20ME60	6063700
80	<ul> <li>Connection type head A: Male connector, M12, 4-pin, angled, D-coded</li> <li>Connection type head B: Male connector, RJ45, 8-pin, straight</li> <li>Signal type: Ethernet</li> <li>Cable: 20 m, 4-wire, CAT5, CAT5e, PUR, halogen-free</li> <li>Description: Ethernet, shielded</li> </ul>	SSL-2J04-H20ME	6063701
3	<ul> <li>Connection type head A: Female connector, M12, 4-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 20 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YG2A14-200UB3XLEAX	2095770
	<ul> <li>Connection type head A: Female connector, M12, 4-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YG2A14-020UB3XLEAX	2095766
3	<ul> <li>Connection type head A: Female connector, M12, 4-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YG2A14-050UB3XLEAX	2095767
	<ul> <li>Connection type head A: Female connector, M12, 4-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YG2A14-100UB3XLEAX	2095768
	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-020UB3XLEAX	2095607
1	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-050UB3XLEAX	2095608
	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-100UB3XLEAX	2095609
No.	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 20 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-200UB3XLEAX	2095611
	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 0.6 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> </ul>	YF2A14- C60UB3XLEAX	2145654

	Brief description	Туре	part no.
	Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation		
No.	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 1 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-010UB3XLEAX	2145655
No.	<ul> <li>Connection type head A: Female connector, M12, 4-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 3 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YF2A14-030UB3XLEAX	2145656
3	Connection type head A: Female connector, M12, 4-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 0.6 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YG2A14- C60UB3XLEAX	2145657
3	<ul> <li>Connection type head A: Female connector, M12, 4-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 1 m, 4-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>	YG2A14-010UB3XLEAX	2145658

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

